Hexagon Pull Up Station

FPW217



Item no. FPW21700-0900			
General Product Information			
Dimensions LxWxH	317x277x240 cm		
Age group	8+		
Play capacity (users)	6		
Color options			



The hexagon pull up can be used in many ways and by multiple users at the same time. Exercises range from normal pull ups to the most dynamic and advanced exercises such as the Muscle Up. The Pull Up Bars are made from solid steel and have a diameter of 32 mm. An ideal size for kids, men and women to have a good grip. As the highest bar is connected at a height of 233 cm everyone will be able to hang freely, to make sure that everyone can reach the pull up bars there are 2 stepping pods at different heights.

1 / 12/17/2024

Data is subject to change without prior notice.

Hexagon Pull Up Station



FPW217



Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.




Steps are made of extruded aluminium with a non-skid surface. Aluminium has high corrosion resistance and ensures durability of the product. Steps have been mounted at heights of 34,7cm and 54,7cm this creates an easy access to reach the overhead activity



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.

Item no. FPW21700-0900			
Installation Information			
Max. fall height	23	3 cm	
Safety surfacing area	36.8 m²		
Total installation time	4.5		
Excavation volume	1.06 m³		
Concrete volume	0.57 m³		
Footing depth (standard)	90 cm		
Shipment weight	263 kg		
Anchoring options	In-ground 🗸		
	Surface	~	
Warranty Information			
Hot dip galvanised steel	Lifetime		
Post	10 years		
Spare parts guaranteed	10 years		

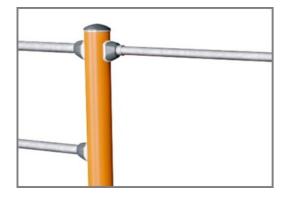

All bars intended for pull ups are made of solid, ø32mm x 138 m, hot dip galvanised, S235JR steel bars. This diameter gives the right grip for everyone.



Sustainability Data

Cradle to Gate A1-A3


FPW21700-0900

FPW217



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

265.25

CO2e/kg

kg CO₂e/kg

1.82

Recycled


materials

%

68.90


Hexagon Pull Up Station


FPW217





* Max fall height | ** Total height

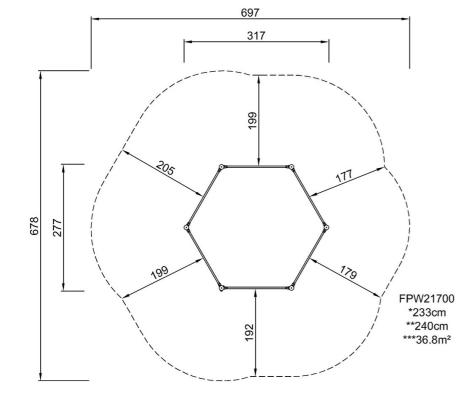

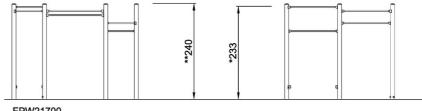

FPW21700 1:100

Click to see TOP VIEW

Click to see SIDE VIEW

4 / 12/17/2024