


Performer Dome

CRP811001

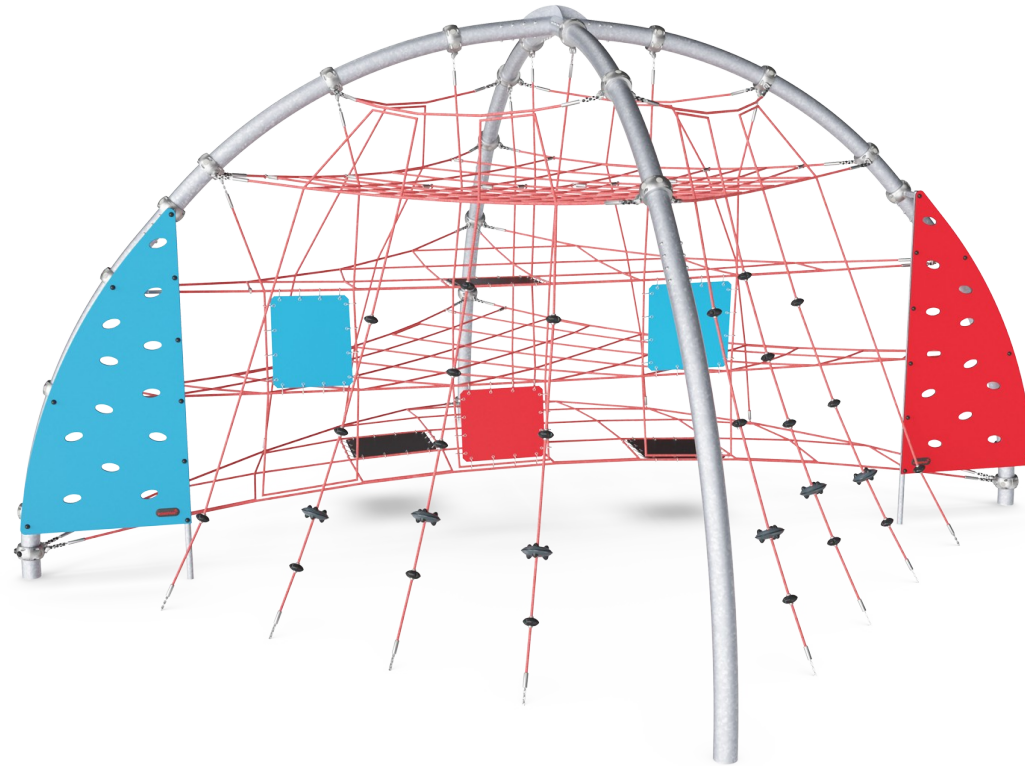



The Corocord Performer Dome with its varied colours and climbing options is an irresistible invitation to climb, sway and bounce. An open space on ground level, surrounded by swaying ropes and climbing walls make for great variation and numerous users on ground level. The huge horizontal nets allow for several children to gather and climb. The membranes

make great destination and rest points before reaching the very top. The climbing and hanging on to the rope structure helps develop core muscle strength as well as agility and balance. The vertical, transparent nets allow children to sense and see the height, developing their spatial awareness and risk taking.

Item no. CRP811001-0401

General Product Information

| | |
|-----------------------|---|
| Dimensions LxWxH | 821x822x415 cm |
| Age group | 5 - 12 |
| Play capacity (users) | 52 |
| Colour options |    |

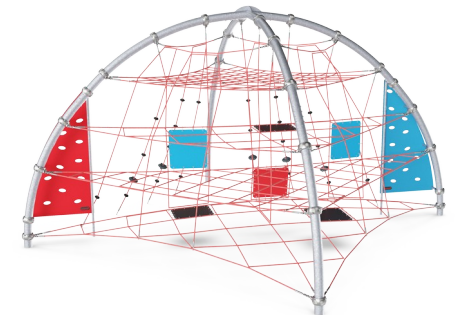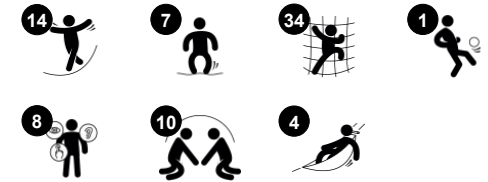



Performer Dome

CRP811001




Climbing wall

Physical: climbing here develops cross coordination, which supports cross-modal perception, necessary for other skills such as reading.

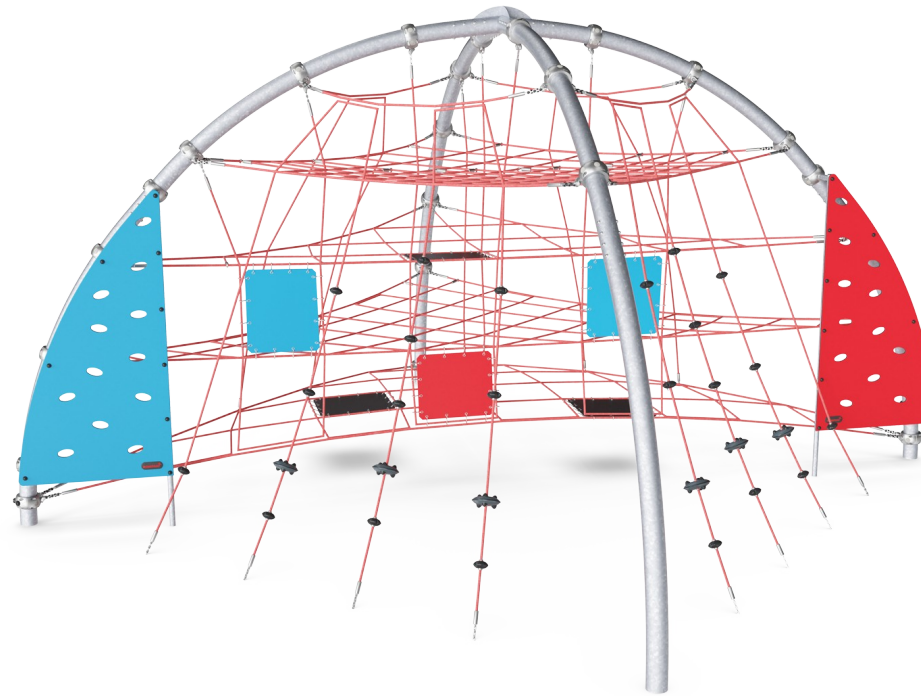

Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. **Social-Emotional:** great meeting point allowing socializing.



Top rungs

Physical: sense of balance and space is developed, facilitating the understanding of distances, important in managing the body in space safely. **Social-Emotional:** children develop courage when climbing up high. This positively affects self-confidence.



Membrane

Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. A faster way up, due to the extra support of the membrane. **Social-Emotional:** a meeting point for retreat from the rope landscape.



Horizontal net

Physical: cross coordination is developed when climbing over and sense of space when looking down. **Social-Emotional:** space for socializing and bouncy breaks.




Ufos


Physical: the UFOs allow for both seated and standing swaying, climbing and turning. A sense of balance develops when sitting and swaying. Climbing up strengthens arm and leg muscles.

Performer Dome


CRP811001

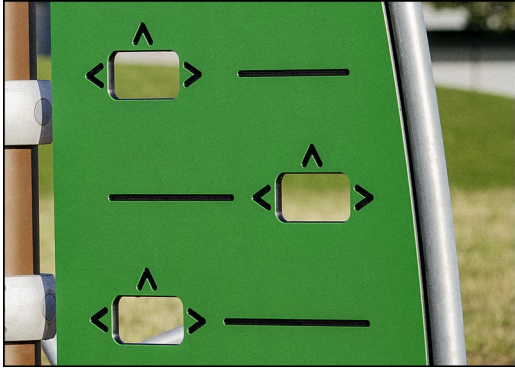

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

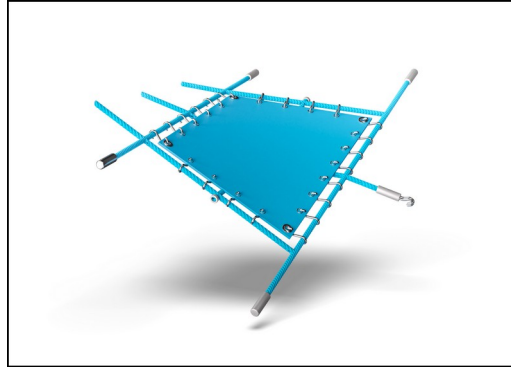

Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 8 mm.

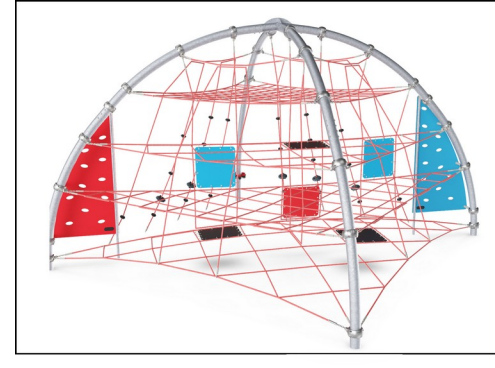

The bended arches are holding the tensioned net structure without additional disturbing fasteners. The arches are produced from high quality stainless steel to allow movement of the net on the surface of the steel arches. The surface is treated to make it shiny.

| Item no. CRP811001-0401 | |
|--------------------------|---------------------|
| Installation Information | |
| Max. fall height | 300 cm |
| Safety surfacing area | 86.3 m ² |
| Total installation time | 32.6 |
| Excavation volume | 5.92 m ³ |
| Concrete volume | 3.02 m ³ |
| Footing depth (standard) | 90 cm |
| Shipment weight | 1,298 kg |
| Anchoring options | In-ground ✓ |
| Warranty Information | |
| Corocord rope | 10 years |
| EcoCore HDPE | Lifetime |
| Hot dip galvanised steel | Lifetime |
| Membrane | 2 years |
| Spare parts guaranteed | 10 years |



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.




Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

| Elevated activities 0 | Accessible elevated activities | Accessible ground level activities | Accessible ground level play types |
|-----------------------|--------------------------------|------------------------------------|------------------------------------|
| Present | 0 | 1 | 1 |
| Required | 0 | 1 | 1 |

**CSA
Z614**
compliant

Sustainability Data

CRP811001

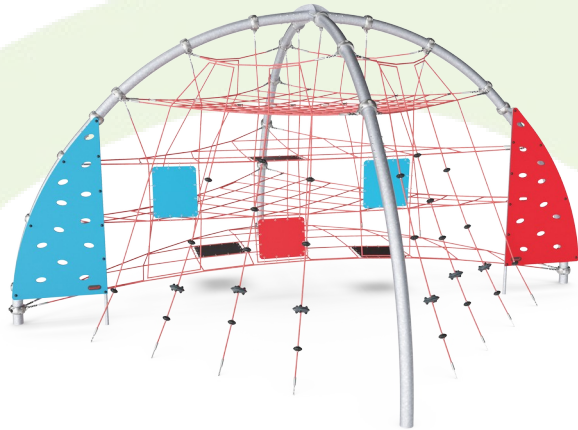

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|-----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| CRP811001-0401 | 2,898.50 | 3.45 | 49.32 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Performer Dome

CRP811001

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

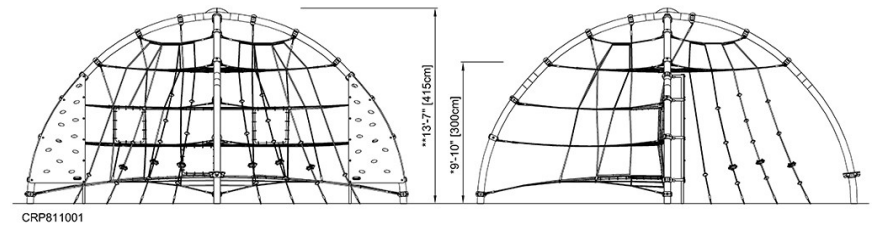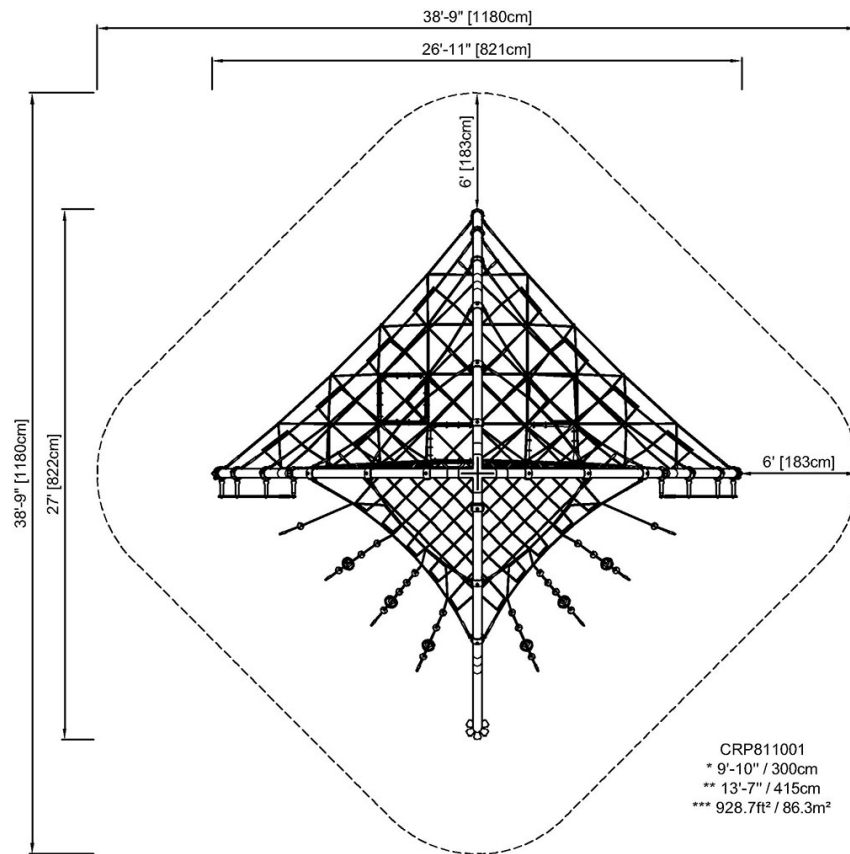

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)