### Entry Seesaw, 2 persons

NRO105



Item no. NRO105-1001				
General Product Information				
Dimensions LxWxH	412x50x115 cm			
Age group	5 - 12			
Play capacity (users)	2			
Colour options				







The Seesaw is a playground classic. It still attracts players again and again, as it has for generations. The archaic play event is still with us for a reason: the tickling in the stomach when going up high, going down fast is eternally appealing. The Seesaw develops the sense of space and rhythm and leg muscles of children. These are crucial motor skills that help children navigate the world securely, e.g. in the street when estimating time, movement and objects. The social dimension and degree of trust in your peer that is demanded when seesawing, is great training of social-emotional life skills such as turn- taking and cooperation. Empathy is trained as well, as players consider others' limits and limitations. Or as they get inspired to try out things they didn't dare to do before, because other children dare to.

# Entry Seesaw, 2 persons

NRO105





Handhold Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.





Rocking together Social-Emotional: the possibility of rocking two together trains cooperation skills. Consideration of others when rocking.



#### Rocking movement

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.

# Entry Seesaw, 2 persons

NRO105





All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



The hardware is made of stainless steel or galvanised steel to ensure durable connections with a high corrosion resistance.

The Robinia wood can be supplied as untreated raw wood or painted with a brown coloured transparent pigment that maintains the golden wood colour of the wood.

Item no. NRO105-1001				
Installation Information				
Max. fall height	115	cm		
Safety surfacing area	27.1	m²		
Total installation time		3.7		
Excavation volume	0.58	m³		
Concrete volume	0.16	m³		
Footing depth (standard)	100	cm		
Shipment weight	195	i kg		
Anchoring options	In-ground	~		

Warranty Information				
Robinia wood	15 years			
Spare parts guaranteed	10 years			
Stainless steel components	Lifetime			

Elevated activities <b>0</b>	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



# **Sustainability Data**

Cradle to Gate A1-A3

NRO105-1001

NRO105



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



#### Verification of CO<sub>2</sub> calculation of: Nature play



Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NR0409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

#### Somo

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



BUREAU VERITAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

64.74

CO2e/kg

kg CO<sub>2</sub>e/kg

0.41

Recycled


materials

%

19.59





NRO105





\* Max fall height | \*\* Total height

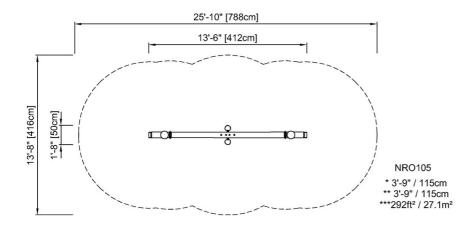

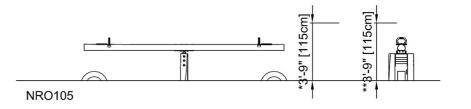

5 / 02/05/2025