Explorer's Bridge

NAT503





Item no. NAT503-0312

General Product Information

Dimensions LxWxH 223x68x94 cm
Age group 1+
Play capacity (users) 4




Colour options









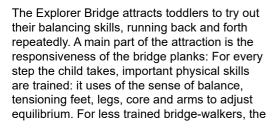

handholds add support. Running or walking the Explorer Bridge is a social experience. Children feel the movements of the other children on the bridge. This feature adds to the physical challenge of keeping the balance when passing on the Explorer Bridge. It additionally spurs cooperation, negotiation, turn-taking and consideration. These are important socio-

emotional life skills when making friends through play.









Trekking bridge

Physical: the wobbly bridge trains balance and coordination as well as spatial awareness: when children cross the bridge by running or jumping. Social-Emotional: turntaking and consideration when passing each other. Cooperation and socializing with others in and around the bridge.



Stairs

Physical: cross coordination is used, supporting the cooperation of the left and right halves of the brain, which is necessary for reading. For young children, spatial awareness is trained when walking stairs.

Explorer's Bridge

NAT503



10 years

10 years



Posts and boards are made of pine wood from sustainable European sources. The wood is pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). On request it can be supplied as FSC® Certified (FSC® C004450).



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.




The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Installation Information				
Max. fall height	4	0 cm		
Safety surfacing area	16.	.7 m²		
Total installation time		5.0		
Excavation volume	0.0	6 m ³		
Concrete volume	0.0	00 m ³		
Footing depth (standard)	3	5 cm		
Shipment weight	10	00 kg		
Anchoring options	In-ground	•		
	Surface	•		
Warranty Information				
Chains	10 years			
EcoCore HDPE	Lifetime			
Hot dip galvanised steel	Lifetime			

Item no. NAT503-0312

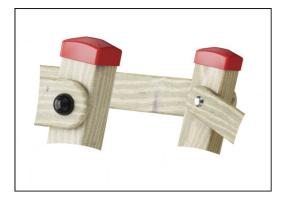

The post end caps are made of injection molded high quality nylon (PA6). PA6 has good wearing and impact strength and is UV stabilized. The end caps protects vertical placed posts to ensure long lifetime.



The support chains of the hang bridge are made of high-quality stainless-steel to ensure durability of the product.



Pinewood

Spare parts guaranteed



Sustainability Data

NAT503





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mode

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg Recycled materials	
	kg CO₂e	kg CO₂e/kg	%
NAT503-0312	89.00	1.30	33.84

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


Explorer's Bridge






* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

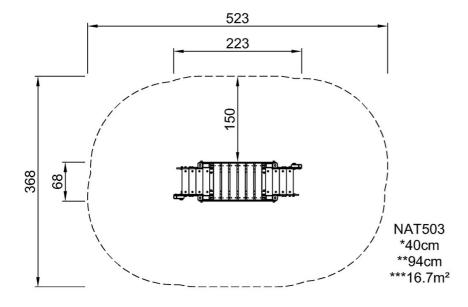



Click to see TOP VIEW

Click to see SIDE VIEW