COR17530





General Product Information

Dimensions LxWxH 22'6"x14'1"x10'1"

Age group 5 - 12

Play capacity (users) 24

Color options











The Butterfly is a transparent, social, climbing magnet for children. The elegantly curved wings with their twisted climbs invite attempts to climb again and again. Thanks to the transparency of the Butterfly nets, the children can see each other and communicate across the Butterfly, and from ground level to top. This adds social interaction and a possibility for

cooperation and sharing. Climbing the Butterfly develops cross-coordination and balancing techniques, which stimulate the child's ability to control movements and ultimately to move confidently through the world. The visible height adds thrills. There are faster and slower ways across and up into the Butterfly: Curved Climbers provide quick access to the top

frame. On ground level three Optic panels with visual effects attract attention and discussion as the moire effect patterns intrigue children: these patterns look different depending on how children focus their eyes, which adds to logical thinking skills.



COR17530










Large climbing net

Physical: the connected nets make climbers feel the movements of the other climbers, adding a dimension of fun and demanding concentration. All muscle groups are trained, as well as cross coordination. Social-Emotional: room for breaks for many and support cooperation and turn-taking skills.

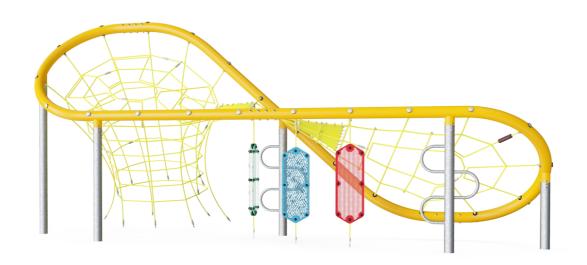







Climbing pole

Physical: cross coordination and muscle strength are trained. Social-Emotional: turntaking and cooperation.











Moiré optic panels

Physical: sitting, hanging and leaning on the rope suspended panels train balance and cross-coordination. Social-Emotional: discussing the patterns and reasoning with others supports negotiating and listening skills, training tolerance and empathy. Cognitive: wondering about, understanding and explaining the reasons for the patterns supports logical thinking skills.








Vertical climbing funnel

Physical: develops cross coordination and trains major muscles when climbing up or down. Social-Emotional: socializing and friendly competition when climbing up and down with friends.

COR17530





Turnable optic panels of two 7mm thick polycarbonate plates with a distance of 40mm. The inside graphic print consist of an inner image layer and outer transparent protection layer. Both PC panel and the water-based lacquer are UV stabilized to prevent fading of the print.



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



The rope is fixed to the large steel pipe by a unique KOMPAN designed tightening solution. It consists of inner and outer nylon (PA6) bushings that guides the rope to an outside threaded aluminum part that tighten the rope.



Installation Information				
Max. fall height		9'10"		
Safety surfacing area	(667ft²		
Total installation time		21.0		
Excavation volume	21.9	97yd³		
Concrete volume	7.3	32yd³		
Footing depth (standard)		2'0"		
Shipment weight	32	62lbs		
Anchoring options	In-ground	~		

Item no. COR175301-0405

Warranty Information			
Hot dip galvanized steel	Lifetime		
Painted toplayer	10 Years		
Ropes & nets	10 Years		
Spare Parts Availability	10 Years		
Stainless steel components	Lifetime		

Corocord ropes with 19mm diameter or more are special 'Hercules' - type with galvanized six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1




3 / 05/02/2024 Data is subject to change without prior notice.

Sustainability Data

COR17530



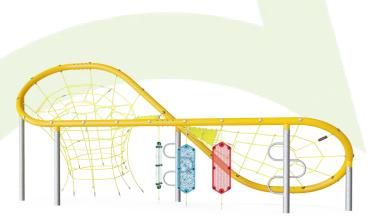

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR175301-0405	3,006.40	2.89	47.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mois

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


COR17530



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

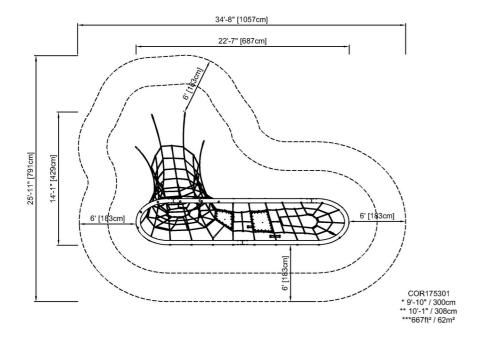



Click to see TOP VIEW

Click to see SIDE VIEW