Hammock

NRO815






General Product Information

Dimensions LxWxH 415x106x165 cm
Age group 3+
Play capacity (users) 2

Colour options



Children can sway gently or energetically, lay down, sit or stand in the Hammock creating an ultimate WOW experience at the playground, that children of all abilities will take joy in the responsiveness and social potential of time and time again. Pushing and pulling the friends in the hammock from side to side is fun and also trains arm strength. The swaying motion

supports important motor skills such as the sense of balance and space. The swaying movements support the understanding of rhythm. In combination, these three skills assist the child's ability to navigate space securely, for instance when judging distances and speed in traffic. The sense of balance is fundamental for all other motor skills and helps the child's motor

stability: preventing falls and being able to sit still for longer periods of time.





Hammock

NRO815







Double ropes

Physical: pushing and pulling others. Holding the ropes support arm muscles. Can be pushed from a wheelchair position.







Hammock bed

Physical: swaying back and forth trains the sense of balance and spatial awareness, both important for judging distances and navigating space confidently. **Social-Emotional:** swaying, sharing and meeting with groups of friends. Turn-taking skills, when deciding who is pushing and who is swaying.


Hammock

NRO815





All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



Hammock is made of steel reinforced single braided 16 mm UV-stabilized PES rope strands. The polyester yarn is made from +95% postconsumer materials and is inductively melted onto each strand. PES has high strength with excellent resistance to abrasion and UV radiation. The rope loops are connected by nylon (PA6) connectors providing a smooth and comfortable hammock.



The swing hangers are made of stainless steel brackets and can move over two axis. The flange bearings are silicone enriched to make the suspension maintenance free. At the rope fixation there is a turnable anti twist functions that prevents winding up the ropes.



Installation Information				
Max. fall height	100 cm			
Safety surfacing area	30.5 m			
Total installation time	2.8			
Excavation volume	2.02 m			
Concrete volume	1.38 m			
Footing depth (standard)	101 cm			
Shipment weight	137 kg			
Anchoring options	In-ground 🗸			

Item no. NRO815-1001

Warranty Information			
EcoCore HDPE	Lifetime		
Robinia wood	15 years		
Ropes & nets	10 years		
Spare parts guaranteed	10 years		
Swing hangers	5 years		



The robinia posts are available as wood inground anchoring or hot dip galvanized steel inground footings.



3 / 11/18/2024 Data is subject to change without prior notice.

Sustainability Data

NRO815





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
NRO815-1001	117.20	1.08	3.35

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

miss

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by. Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





NRO815



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

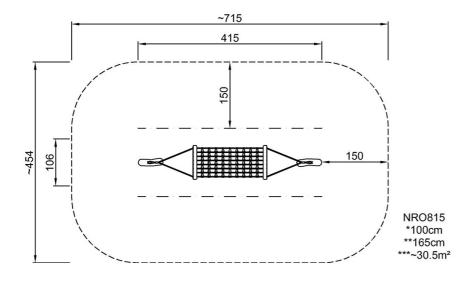

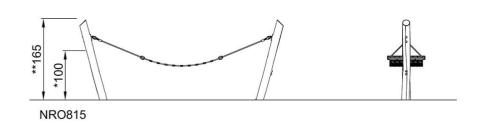

Click to see TOP VIEW

Click to see SIDE VIEW