
Steel Swing H:2.5m, 100cm Rope Seat, Anti-wrap

KSW92012



| Item no. KSW92012-0910 | | |
|-----------------------------|----------------|--|
| General Product Information | | |
| Dimensions LxWxH | 669x184x255 cm | |
| Age group | 4+ | |
| Play capacity (users) | 9 | |
| Color options | • | |



WOW! The combination of the bird's nest swing and two single seats swing is a hit: children love it, as it can be played on individually or together. It facilitates laying, seated, and standing swinging, alone or together. It is a great facilitator of fun rough-and-tumble play. The seats cater for multiple users of all abilities and most ages, day after day, for hours and hours. The anti-wrap function makes sure that the seats are not wrapped around the top beam, but always available. Swinging, apart from being tremendous fun, trains the children's ABC: agility, balance and coordination, as well as their spatial awareness. These motor skills are crucial to being able to judge distance and navigate traffic safely. The varied swinging activities train the arm, leg and core muscles. The jumping off builds bone density – the majority of which is built up during the first years of life. Finally, this swing supports social skills such as turn-taking, cooperation.





Steel Swing H:2.5m, 100cm Rope Seat, Anti-wrap



KSW92012





Vertical posts of hot dip galvanised steel or powder coated on pre-galvanised steel base. Swing frame end connectors and crossbeam of hot dip galvanised steel or powder coated on hot dip galvanised steel base.

KOMPAN heavy duty designed swing hangers of stainless steel with anti-twist function. The hangers are attached to the cross beam on a welded bracket with two bolts, The bearings are embedded with silicone lubricant and needs no further lubrication.



KOMPAN designed the bird's nest seats to be light in weight and in compliance with global safety standards. The soft, shock absorbent bumpers with non-slip surface makes the swing seat extremely user friendly. Choose between a rope version with reinforced PA rope or a moulded PE version. Both equipped with soft rubber bumpers.

| Item no. KSW92012-0910 | | |
|--------------------------|-----------|------|
| Installation Information | | |
| Max. fall height | 145 | 5 cm |
| Safety surfacing area | 41.5 | 5 m² |
| Total installation time | | 7.4 |
| Excavation volume | 1.58 | 3 m³ |
| Concrete volume | 0.58 | 3 m³ |
| Footing depth (standard) | 90 |) cm |
| Shipment weight | 34 | 8 kg |
| Anchoring options | In-ground | • |



The standard seats of KOMPAN swings is engineered for maximum safety and durability. The two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot dip galvanised steel or stainless steel for all swings heights.



The swing hangers are made of high quality UVstabalised nylon (PA6) housing with integrated lifetime sealed ball bearings. The height adjustable chains are fixed by a stainless steel hook with theft proof snake-eye bolt in a turn able anti twist housing. All seats with two chain fixation are available with either standard or anti-wrap suspension.



Unique designed seats for toddles: Baby seat of rubber. Toddler seat of PUR with four chain suspension for easy movement. Cradle seat. You & Me swing seat for adult/child or children of different ages to swing together while facing each other.



Sustainability Data

Cradle to Gate A1-A3

KSW92012-0910

KSW92012



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



+45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

889.80

CO2e/kg

kg CO₂e/kg

3.48

Recycled

materials

%


42.70


Steel Swing H:2.5m, 100cm Rope Seat, Anti-wrap

KSW92012

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

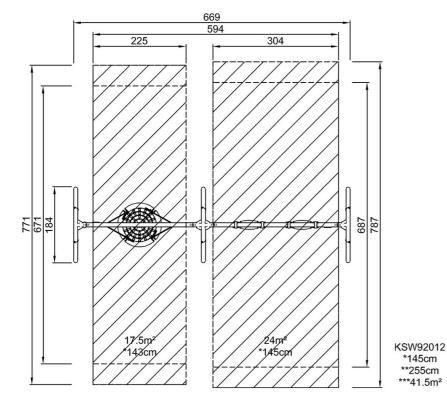

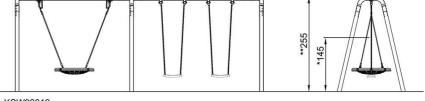

KSW92012

Click to see TOP VIEW



