Maxite with Add Ons


COR10524



Item no. COR105241-0405				
General Product Information				
Dimensions LxWxH	1231x741x639 cm			
Age group	5+			
Play capacity (users)	76			
Colour options				



With thrilling heights and selection of activities, The Maxite with Add-Ons offers a climbing experience in three-dimensional nets for children. Membranes add fast, bouncy routes and function as destinations and meeting points too. The top membrane is a popular destination and trains turn-taking skills and cooperation. The wild climbing accesses and gliding egresses add thrill and variation and the climbing panels make possible hiding and more sturdy climbing. The bouncy nets make the child feel its own and all the friends' movements when using the net. At this height that means risk assessment and concentration. The nets train important motor skills such as proprioception, spatial awareness and crossbody coordination. These skills are fundamental for risk assessment when for instance judging and navigating traffic securely.



Maxite with Add Ons

COR10524





Height Social-Emotional: children develop courage and self-regulation when being up high. This positively affects self-confidence.





Climbing net

Physical: the inclined net supports the upward climbing movement of the body. Cross-coordination, spatial awareness and physical strength are trained. Social-Emotional: the big meshes allow for more children being seated together, sharing.



Climbing wall

Physical: supports cross coordination and leg, arm and hand strength. Climbing through the hole demands good spatial awareness and involves risk taking. **Social-Emotional:** the inclination makes climbing feel secure, especially for younger children.



Banister bars

Physical: supports coordination, arm and core muscles. Landing strengthens bone density **Social-Emotional:** turn-taking and risk-taking.

Ladder

Physical: cross coordination and muscle strength are developed when children climb the ladder. The climbing also supports leg and arm muscles.



Connected nets

Physical: the connected nets make the climbers feel the movements of the other climbers. All muscle groups are trained, as well as cross coordination. Social-Emotional: the climbers' movements affect the other climbers, so consideration and turn-taking is supported.




Membrane path

Physical: a faster way up, due to the extra support of the membrane. **Social-Emotional:** a meeting path with points for retreat from the rope landscape.

Maxite with Add Ons

COR10524





The panel is manufactured from 19mm EcoCore™ HDPE. This highly durable, ecofriendly material is not only recyclable after use, but also consists of a core produced from 100% recycled material.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.




The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, to provide the best possible rope climbing experience.

Item no. CO	R105241-0405
-------------	--------------

Installation Information

Max. fall height	227 cm
Safety surfacing area	121.9 m²
Total installation time	63.4
Excavation volume	10.04 m³
Concrete volume	5.82 m³
Footing depth (standard)	110 cm
Shipment weight	2,229 kg
Anchoring options	In-ground 🗸

Warranty Information	
Corocord (Hercules) Rope	10 years
EcoCore HDPE	Lifetime
Galvanised Steel	Lifetime
Membrane	2 years
Spare Parts Guarantee	2 years 10 years



Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



The metal parts are made from high-quality steel consisting of hot-dip galvanisation on both the inside and outside and also includes leadfree zinc and an additional layer of powder coating. This ensures both excellent corrosion resistance and colourful design expression. LUNA

A MARS



VENUS TERRA

The COROCORD Frame Nets are available in 8 colour themes, ranging from elegant to expressive black or a natural neutral sand colour section to bright eye-catching signal colours which appeals to children of all ages.



SOLARIS





Sustainability Data

COR10524



Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR105241-0405	5,325.74	3.51	43.72

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

maiz

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE

www.bureauveritas.dk

+45 7731 1000





COR10524

* Max fall height | ** Total height | *** Safety surfacing area



* Max fall height | ** Total height

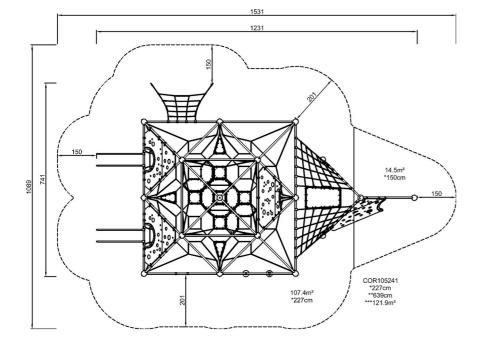



COR105241

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 05/23/2024

Data is subject to change without prior notice.