
Combi 5

FSW105





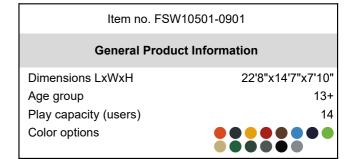

See KOMPAN Fit App for More Information





With 10 different workout stations in one, this Combi 5 Pro package offers a superior street workout and calisthenics experience, featuring all essential elements for users to release their creativity. The dimensions of the pull up bars have been optimized to 1.25" for the best possible hand grip. The strength of the bar is secured through a conical design and a full steel bar. The 4'6" wide pull up bars are designed to give plenty of space to dynamic exercises and promote sideways exercises such as the typewriter pull up. The wide bars also allow for users to do pull ups next to each other and thereby compete or motivate each other.


Combi 5

FSW105



10 Years


10 Years



The vertical pole is made of a ø38 x 2mm hot dip galvanized tube, the perfect size for a good grip when you try to do the Human Flag!



Steps are made of extruded aluminium with a non-skid surface. Aluminium has high corrosion resistance and ensures durability of the product. Steps have been mounted at heights of 34,7cm and 54,7cm this creates an easy access to reach the overhead activity



All bars intended for pull ups are made of solid, ø32mm x 138 m, hot dip galvanized, S235JR steel bars. This diameter gives the right grip for everyone.

Item no. FSW10501-0901			
Installation Information			
Max. fall height		7'8"	
Safety surfacing area	517ft ²		
Total installation time	11.1		
Excavation volume	1.67yd³		
Concrete volume	0.76yd³		
Footing depth (standard)	2'11"		
Shipment weight	1061lbs		
Anchoring options	In-ground	~	
	Surface	~	
Warranty Information			
Connectors	10 Years		
EcoCore HDPE	Lifetime		
Hot dip galvanized steel	Lifetime		



The handles offer 4 different heights to place the hands or feet; 48cm, 76cm, 104cm and 132cm, creating the opportunity to scale the difficulty of the exercise.



Post are made of 101.6 x 2mm, pre-galvanized carbon steel and powder coated, a great protection to all conditions.



The surface is made of Ekogrip[™] panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip[™] panels have a non-skid effect for comfortable and safe training at all weather circumstances.



Post

Spare Parts Availability

Sustainability Data

FSW105




Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials	
	kg CO₂e	kg CO₂e/kg	%	
FSW10501-0901	777.92	2.02	64.99	

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023




Data is subject to change without prior notice.




FSW105

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

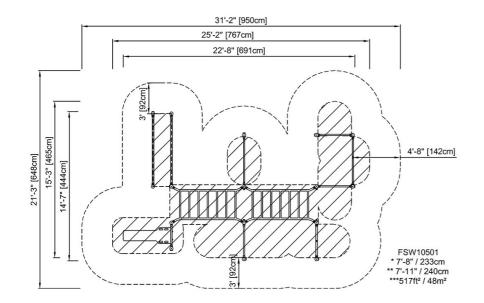



FSW10501

Click to see TOP VIEW



