



# Mini Dome

CRP810101

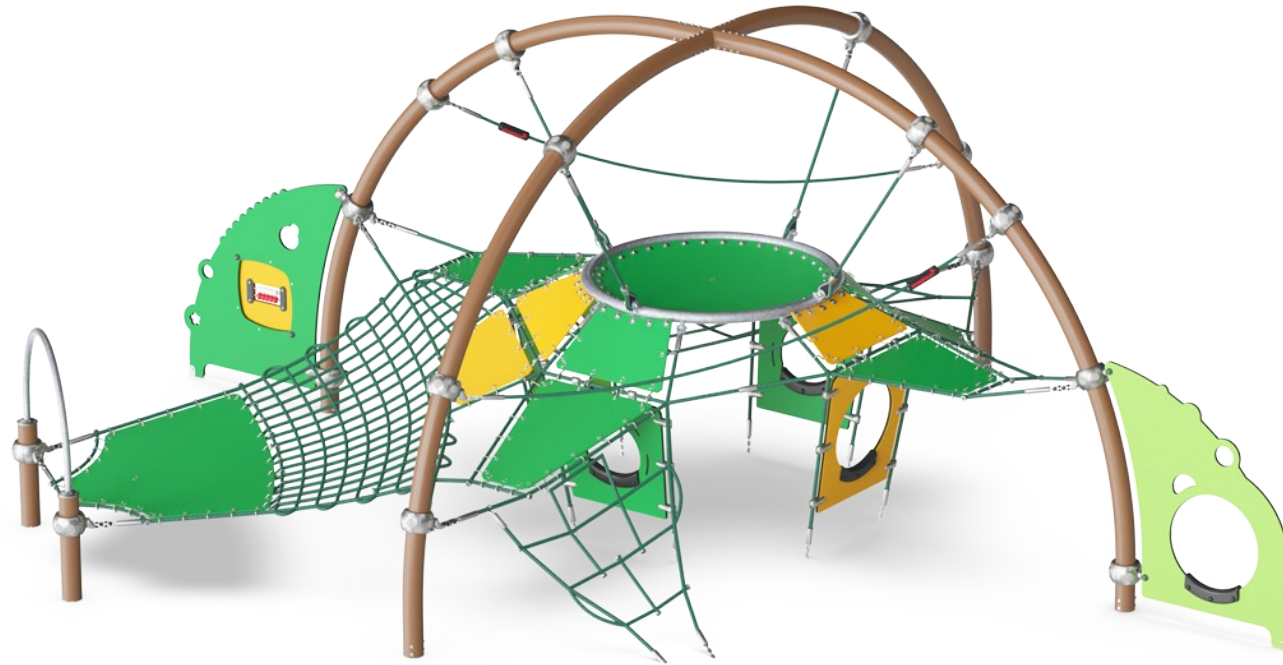

|                                    |                |
|------------------------------------|----------------|
| Item no. CRP810101-0902            |                |
| <b>General Product Information</b> |                |
| Dimensions LxWxH                   | 695x552x255 cm |
| Age group                          | 2+             |
| Play capacity (users)              | 32             |
| Colour options                     |                |

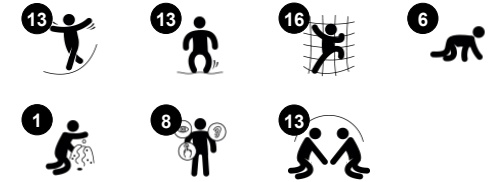

Marvelous Mini Dome amazes children with its richness in play variation and detail, again and again. The Dome can be entered from all over: bouncy membranes, nets, climbing ropes, and stairs take the toddlers to the top membrane circle. This bouncing viewpoint invites friends to meet. Under it, a cozy den is created with varied climb or peep-through membranes that


invite play classics such as peek-a-boo. The panels and hammock around the central nets allow for dramatic play and exploration with sensory details. They complete the play offerings apart from being great fun and train motor skills such as balance, coordination, and proprioception. These are fundamental in moving the body confidently and securely. The

varied movements additionally instill an understanding of space, shapes, and measures which is fundamental for understanding mathematics. The Mini Dome offers great play capacity, so children learn turn-taking skills through play and make friends that way.





# Mini Dome

CRP810101



## Inclined net with membrane

**Physical:** the inclined net supports the upward climbing movement of the body, which stimulates cross-body coordination and muscle strength. The bouncy membrane develops the sense of balance when children jump, stand or sit here. **Social-Emotional:** the big net allows for more children to be active together, seated or lying.

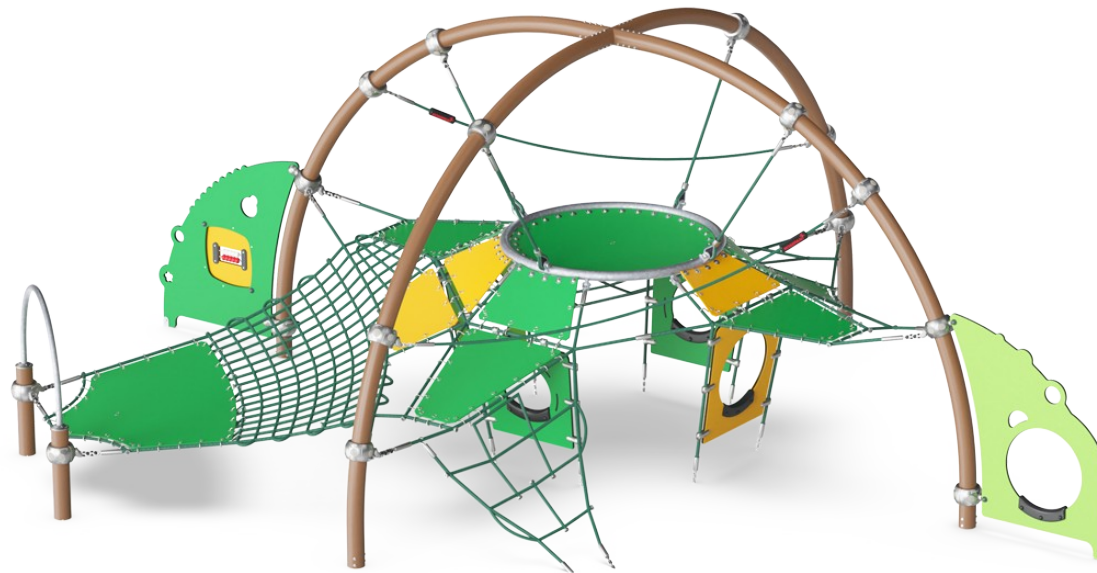

## Abacus

**Cognitive:** supports understanding of measures.



## Top circular membrane

**Physical:** the sense of balance and space is supported when entering the slightly bouncing membrane. This trains the understanding of time, space and measures important in moving the body in securely. **Social-Emotional:** children develop courage when climbing and being up high. This positively affects self-confidence. The top membrane provides a great place to be together with friends.



## Crawl-through hole

**Physical:** the hole allows for climbing and crawling through, developing cross coordination, proprioception and spatial awareness. **Social-Emotional:** cooperation and turn-taking when passing one another. **Cognitive:** understanding space, shape and measures when seeing if the body can fit through the hole.



## Various membranes

**Physical:** the bouncy membranes develop the sense of balance when the child stands, steps or sits there. Cross coordination and proprioception when crawling through. **Social-Emotional:** great point for a break or meeting with friends. Showing consideration of others and helping others when passing one another going up or down the membranes.

# Mini Dome

CRP810101



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The bended arches are holding the tensioned net structure without additional disturbing fasteners. The arches are produced from high quality stainless steel to allow movement of the net on the surface of the steel arches. The surface is treated to make it shiny.



The COROCORD Frame Nets are available in 6 galactic colour themes. The themes draw on bright colours that appeal to children of all ages. Can be changed in the configurator.



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

Item no. CRP810101-0902

### Installation Information

|                          |                          |
|--------------------------|--------------------------|
| Max. fall height         | 127 cm                   |
| Safety surfacing area    | 54.0 m <sup>2</sup>      |
| Total installation time  | 23.2                     |
| Excavation volume        | 16.28 m <sup>3</sup>     |
| Concrete volume          | 11.43 m <sup>3</sup>     |
| Footing depth (standard) | 90 cm                    |
| Shipment weight          | 714 kg                   |
| Anchoring options        | In-ground ✓<br>Surface ✓ |

### Warranty Information


|                          |          |
|--------------------------|----------|
| Corocord rope            | 10 years |
| EcoCore HDPE             | Lifetime |
| Hot dip galvanised steel | Lifetime |
| Membrane                 | 2 years  |
| Spare parts guaranteed   | 10 years |

**EN  
1176**  
compliant



# Sustainability Data

CRP810101

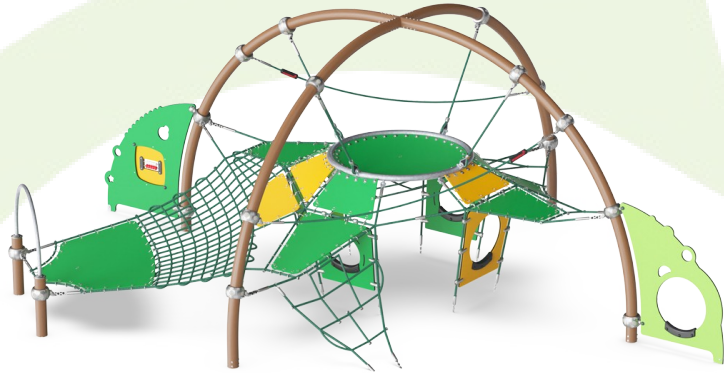

| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
|                      | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| CRP810101-0902       | 1,552.31                       | 3.37                    | 45.53              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# Mini Dome

CRP810101

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

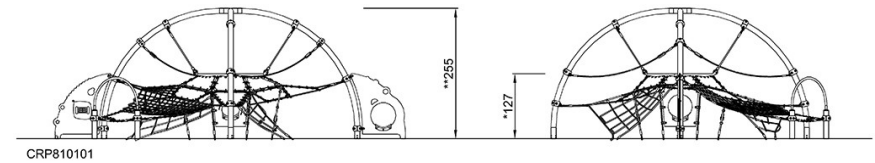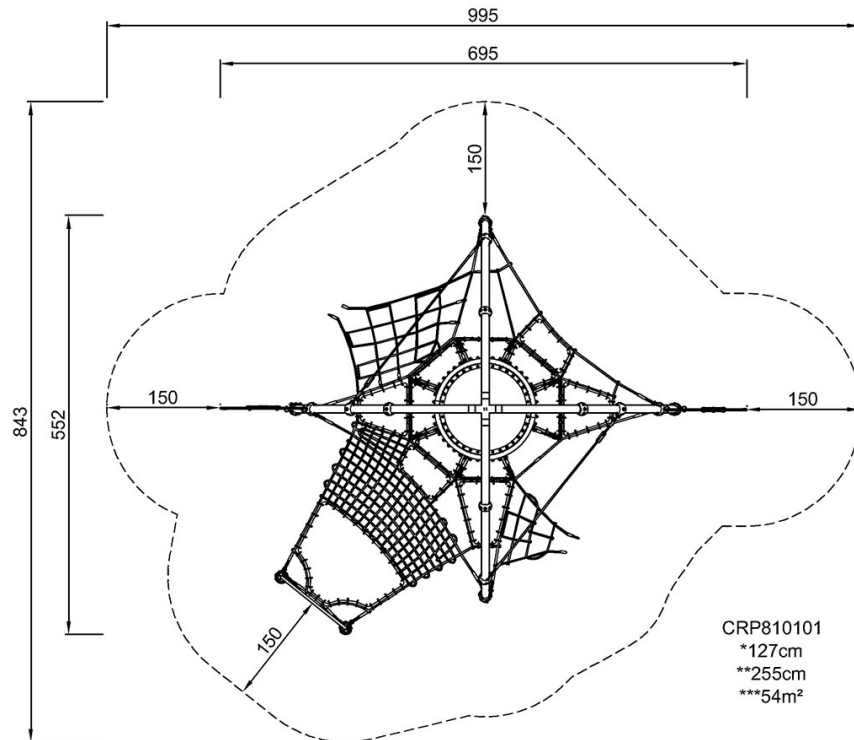

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)