Hill Climber Rope with EPDM

NR0892



| Item no. NRO892-1001 | | |
|-----------------------------|---------------|--|
| General Product Information | | |
| Dimensions LxWxH | 260x18x139 cm | |
| Age group | 3+ | |
| Play capacity (users) | 2 | |
| Color options | | |



The fun of fundamentals make children play again and again: the Hill Climber invites and supports grappelling up steep hills. The wonderful combination of stemming the feet onto the hill, holding tight to the rope and leaning back, walking upwards is a repeatedly thrilling experience. Apart from being great fun, the combination of movement also provides great gross motor and muscle training. Hands, arms and upper body get trained when gripping the perfectly sized rope, legs get trained walking upwards, and core muscles are put to work when leaning back, tensioning the core. The motor skill training is intense: the spatial awareness, the sense of balance and the coordination come to full use. This stimulates the overall motor confidence of the child and helps train the ability to e.g. judge distances – important in street traffic.





Hill Climber Rope with EPDM

NR0892

Hill climber rope with discs

when rappelling together.

Physical: trains cross coordination, balance and muscle strength. Cross coordination also stimulates cross-modal perception, necessary for skills such as reading. Social-Emotional: the discs define sections so that children develop turn-taking and cooperation skills

88






Hill Climber Rope with EPDM



NR0892





Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eyecatching signal colours.



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).

| Item no. NRO892- | 1001 | |
|--------------------------|-----------|------|
| Installation Information | | |
| Max. fall height | (|) cm |
| Safety surfacing area | 15. | 1 m² |
| Total installation time | 2.0 h | ours |
| Excavation volume | 1.0 | 6 m³ |
| Concrete volume | 0.5 | 3 m³ |
| Footing depth (standard) | 100 |) cm |
| Shipment weight | 4 | 3 kg |
| Anchoring options | In-ground | • |

| Warranty Information | | |
|------------------------|----------|--|
| Chains | 10 years | |
| Corocord rope | 10 years | |
| EPDM components | 2 years | |
| Robinia wood | 15 years | |
| Spare parts guaranteed | 10 years | |



Fully coloured EPDM rubber discs with smooth surface. The moulded EPDM surrounds a hot dip galvanised steel core that ensures both the stability of the discs and durable fixation to the rope.



Hill climber ropes are ideal embankment play products, usable on slopes of 20-60° and available in various lengths.



Sustainability Data

Cradle to Gate A1-A3

NRO892-1001

NR0892



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Nature play



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NR0409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



+45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

25.15

CO2e/kg

kg CO₂e/kg

0.74

Recycled


materials

%

5.94




NR0892




KOMPAN Let's play

* Max fall height | ** Total height

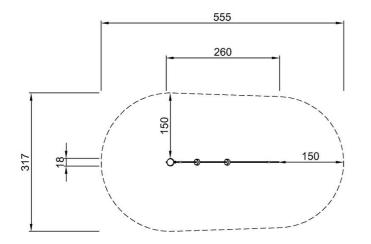

NRO892 **139cm ***15.1m²

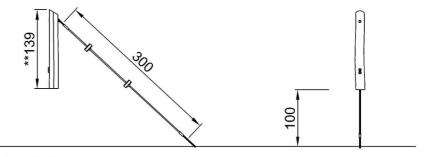

NR0892

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 06/20/2025