Uno Climber

PCM81021



Item no. PCM81021-0950				
General Product Information				
Dimensions LxWxH	121x289x240 cm			
Age group	5 - 12			
Play capacity (users)	5			
Colour options				





The Uno Climber is a playground favorite with school children. They are immediately attracted to the dense, versatile activity hub. Thanks to the varied climbing opportunities with hanging bars, rope ladders and stable climbing wall with cleats and climb-through-hole, all children have a chance of doing something. The openness in design also invites conversation and social interaction across the Uno Climber. This supports children's socio-emotional development and invites all in. With its combination of activities, the Uno Climber stimulates children's cross-coordination, strenght and bone density. All of these abilities are built for life in childhood. So the more they play, the more they gain.

Uno Climber

PCM81021





Pipe climber Physical: muscle strength, cross coordination, and spatial awareness when climbing. Social-Emotional: encourage socializing when seated on the bars.





Climbing wall Physical: develops children's cross coordination, eye-hand coordination, and muscle strength when climbing. Social-Emotional: two-sided climb invites cooperation.



Overhead ladder

Physical: develops children's upper body muscles and arm strength, cross coordination and spatial awareness. This is especially important due to sedentary lifestyles and back-pain in children. **Social-Emotional:** chill and socialize on top of the overhead ladder, training cooperation.

Uno Climber


PCM81021



10 years



Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.



Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

Item no. PCM81021-0950						
Installation Information						
Max. fall height	22	3 cm				
Safety surfacing area	28	.2 m²				
Total installation time		5.5				
Excavation volume	0.9)1 m³				
Concrete volume	0.3	88 m³				
Footing depth (standard)	9	0 cm				
Shipment weight	25	52 kg				
Anchoring options	Surface	~				
	In-ground	~				
Warranty Information						
EcoCore HDPE	Life	etime				
Hot dip galvanised steel	Life	etime				
Post	10 y	/ears				
Ropes & nets	10 y	/ears				



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.

KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCoreTM panels of 95% post-consumer recycled waste and molded PP decks.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	0	0



Spare parts guaranteed

Sustainability Data

PCM81021



Cradle to Gate A1-A3		Total CO ₂ emission	CO₂e/kg	Recycled materials
		kg CO₂e	kg CO₂e/kg	%
	PCM81021-0950	245.93	1.45	75.06
	PCM81021-0901	256.86	1.95	66.91

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





PCM81021



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

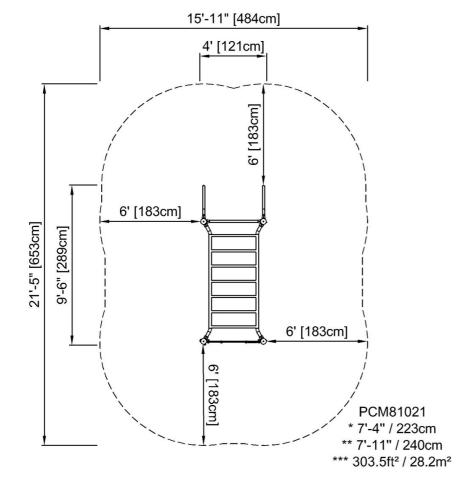

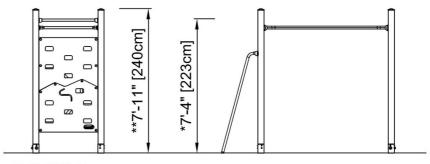

PCM81021

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 09/12/2024