Fairytale Dog

M173



Item no. M17301-01P					
General Product Information					
Dimensions LxWxH	36x94x80 cm				
Age group	2+				
Play capacity (users)	1				
Colour options	•				









The fabulous dog with the big eyes from the fairytale the Tinderbox by Hans Christian Andersen just tantalises children. The rider is placed in the seat and well balanced with a leg on each side and from there can choose to rock with the highest momentum or to enjoy a more controlled ride.

Data is subject to change without prior notice.

Fairytale Dog

M173





Handhold Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.





Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.



Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Foot support

Physical: a good footrest supports intensive rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely. To rock intensely also supports coordination and muscle strength.



Eye Social-Emotional: the eye evokes emotions of empathy, encouraging children to look the animal in the eye.

Fairytale Dog











Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

Item no. M17301-01P						
Installation Information						
Max. fall height	6	0 cm				
Safety surfacing area	7.5 m²					
Total installation time	2.6					
Excavation volume	0.19 m³					
Concrete volume	0.00 m³					
Footing depth (standard)	45 cm					
Shipment weight	31 kg					
Anchoring options	In-ground 🗸					
	Surface	~				
Warranty Information						
EcoCore HDPE	Lifetime					
Membrane	2 years					
Spare parts guaranteed	10 years					
Springs	5 years					



Handholds and footrests are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.



Seat is made of a moulded PP insert with an outer soft layer of TPE rubber. TPE rubber has good shock absorption and ensures durable solution.



Sustainability Data

Cradle to Gate A1-A3

M17301-01P

M173



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

sund

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

70.90

CO2e/kg

kg CO₂e/kg

2.53

Recycled

materials

%

48.23




M173



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

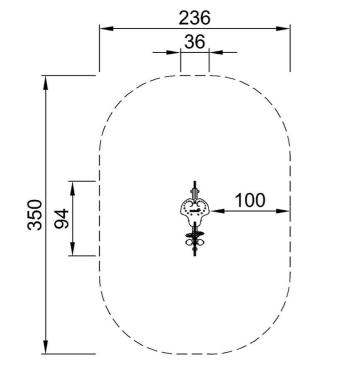

O	*60 *	**80	
M17301			

M17301 *60cm **80cm ***7.54m²

Click to see SIDE VIEW

Click to see TOP VIEW