

# Triple Jump


FSW41200

**KOMPAN**<sup>®</sup>



产品编号 FSW41200-0001

## 产品信息概览

长宽高尺寸	114x120x74 cm
适用年龄段	13+
容纳人数	3
颜色选择	




The Triple Jump is a simple yet versatile device. With three different step heights and a slip-resistant surface, it provides a challenge for users of all sizes and fitness levels. It is ideal for various types of cardio-stepping and a wide range of lower-body strength exercises.

# Triple Jump

FSW41200

KOMPAN®

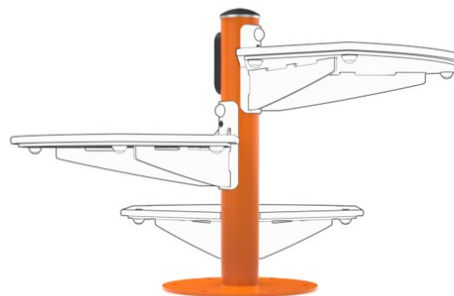

所有的 KOMPAN 健身产品都符合 ASTM F3101 & EN16630 户外健身标准。静态测试通过在 78 公斤的指定负载上增加动态因素和安全因素。设备为单人提供 420 公斤的承载力。

信息指示牌是由 PA6(聚酰胺)制成,显示相关练习和二维码。当扫描二维码时,会链接到运动的动画演示,并提供下载 KOMPAN sport & fitness 应用程序的途径,该应用程序将提供大量的运动和锻炼。

立柱由  $\varnothing 101.6 \times 2 \text{mm}$  制成,预镀锌碳钢,粉末涂层,可在所有情况下提供出色的保护。



产品编号 FSW41200-0001

## 安装信息

最大跌落高度	60 cm
安全面积	14.5 m <sup>2</sup>
安装总时长	0.0 小时
开挖量	0.00 m <sup>3</sup>
混凝土使用量	0.00 m <sup>3</sup>
标准入地深度	0 cm
运输重量	0 kg
固定选项	

## 质保信息

立柱	10 年
镀锌钢结构	终身质保
EcoCore HDPE	终身质保
承保零部件	10 年

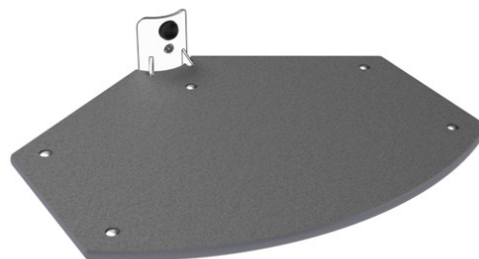

KOMPAN 健身产品的标准可在橙色 RAL2010 和灰色 RAL7012 中选择。所有其他 RAL 颜色都可根据需求选择,以匹配周边的环境或颜色主题!

跳台的顶板采用 Ekogrip® 面板制成,包括 15mm 聚乙烯底层和 3mm 热塑性橡胶表层,具有防滑效果,可在各种天气条件下提供安全的跳跃体验。

The triple jump platform integrates three jump heights at 20, 40 and 60 cm into one compact structure, delivering multiple training options while minimizing the overall footprint.

EN  
16630  
compliant

# 可持续性数据

FSW41200



## Independent review certificate

Kompan A/S  
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO<sub>2</sub>e-calculations (covering materials, processing, waste and transport) done by Kompan for "Fitness", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database EcoInvent 3.11. These values are reported as kg CO<sub>2</sub>e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO<sub>2</sub>e.

### Object

The verification has been done on the one pager "FAZ10100-0900" version: 27-10-2025. The supporting documentation "KOMPAN data\_updated emissions factors\_2025\_V2" and "Emissions factors, EPD's and ecoinvent 3.11\_2025" was also reviewed and approved.

### Declaration

The review has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO<sub>2</sub>e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

**Note:** This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

**Ref.:** Kompan\_Verification report 2025, 28-10-2025

**Date of certificate:** 29-10-2025

**Expire date:** 29-10-2027

**Verified by:** Julie Marie Vejsgaard Larsen, Environmental Auditor

**Signature:**

### 从原材料到成品

CO<sub>2</sub> 排放总量

kg CO<sub>2</sub>e

CO<sub>2</sub> 排放量 / 千克

kg CO<sub>2</sub>e/kg

回收的原料

%

FSW41200-0001

0.00

0.00

0.00


这些因素采用的总体框架为环保产品声明 (EPD), 该声明可量化“产品生命周期的环保信息, 并对相同功能的产品进行对比”(ISO, 2006)。在遵循该框架的同时, 对从原材料到制造的整个产品阶段 (A1-A3) 应用生命周期评估法。

# Triple Jump


FSW41200

最大跌落高度 | 总高度 | 安全区域

最大跌落高度 | 总高度

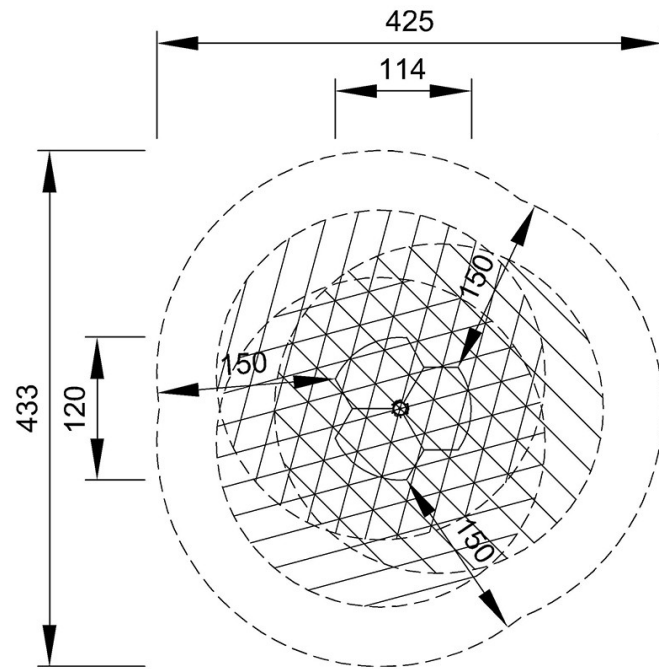

FSW41200  
\*60cm  
\*\*74cm  
\*\*\*14.5m<sup>2</sup>

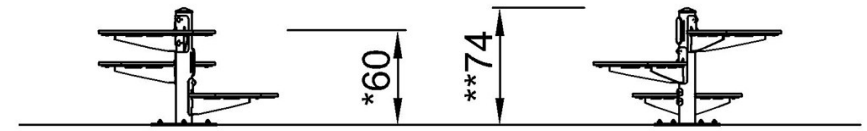

FSW41200

[点击查看俯视图](#)

[点击查看侧面图](#)