M165



Item no. M16501-01P			
General Product Information			
Dimensions LxWxH	1'4"x2'2"x2'8"		
Age group	2 - 5		
Play capacity (users)	1		
Color options	•		







Rocking on the Gorilla is a wildly attractive playground activity that children will return to again and again. Children are able to control the play by moving their bodies to make the Gorilla rock. They feel delighted to have the Gorilla respond to their movements. The two sides support the seated position, and the footholds and handholds provide a stable point to stem feet and hands to create the movement. This is not only fun, but is also good for physical and cognitive development. When children begin to learn the connections between their bodies and their movements, they begin to make cognitive connections to a range of body movements and sensations. The Gorilla theme will be exciting for the child's imagination, and will encourage wonderful physical and imaginative play.





Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.





Rocking spring

Physical: response to movement increases spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Handhold Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.



Foot support Physical: the possibility of footrest supports intense rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely.









Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

Item no. M1650	1-01P			
Installation Information				
Max. fall height		1'4"		
Safety surfacing area		156ft ²		
Total installation time		1.4		
Excavation volume	0.	25yd³		
Concrete volume		0yd³		
Footing depth (standard)		1'6"		
Shipment weight		85lbs		
Anchoring options	In-ground 🗸			
	Surface	~		
Warranty Information				
EcoCore HDPE	Lifetime			
Hot dip galvanized steel	Lifetime			
Spare Parts Availability	10 Years			
Springs	5 Years			



Handle is made of polypropylene PP with excellent impact strength and usable within a large temperature span.



Seat is made of Ekogrip[™] panel that consist of a 15mm thick PE base with 3 mm top-layer of soft rubber with a non-skid effect.

;	Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
	Present	0	1	1
	Required	0	1	1



Sustainability Data

M165

~
KOMPAN
Let's play

Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

maiz

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk

By Bureau Veritas HSE +45 7731 1000

Total CO2 Recycled Cradle to Gate A1-A3 CO2e/kg emission materials % kg CO₂e kg CO₂e/kg M16501-01P 78.18 2.12 57.16

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


M165




Let's play

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

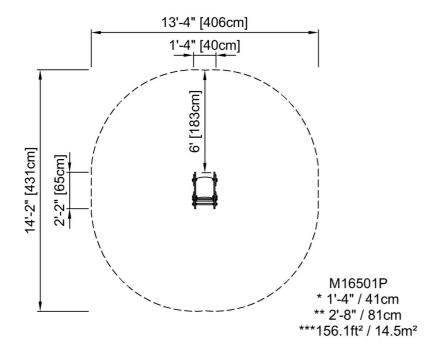

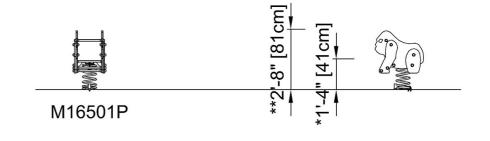

Click to see TOP VIEW

5 / 05/23/2024