

# Bridge with Wooden Slats, 12m

COR64120

**KOMPAN**  
Let's play



产品编号 COR641201-1101

## 产品信息概览

长宽高尺寸	1247x142x292 cm
适用年龄段	5+
容纳人数	24
颜色选择	



非常适合连接两个区域。木板条会给人一种安全的感觉。但是，在桥上行走的时候会明显感觉到绳索的晃动，十分刺激。



# Bridge with Wooden Slats, 12m

COR64120



## Height

**社交情感** : children develop courage and self-regulation when being up high. This positively affects self-confidence.



## Wooden slats

**身体素质** : the bridge sways gently, training the sense of balance and space when the child crawls or balances across. These motor skills in combination are great for learning how to navigate the body in space. **社交情感** : 孩子们可以一起在绳桥上摇摆，感受自己和他人的动作。例如，在与其他人擦肩而过时将促进合作和同理心的发展。



## Transparency

**社交情感** : 透明的设计使得整个过程中合作和交流成为可能，这些都是孩子们需要学习的重要生活技能。

# Bridge with Wooden Slats, 12m

COR64120



直径大于等于 19mm 的 Corocord 绳索是特殊的“大力神”型镀锌六股钢丝。每根丝束都用 PES 纱紧密包裹，然后将其融化到每根独立的丝束上。这些绳索具有很高的耐磨性和防破坏性，可以根据需要在现场更换。



Corocord“S”扣在 Corocord 产品中作为通用连接。用特殊的液压机将带有圆形边缘的 8mm 不锈钢条压在绳索周围，使其成为理想的连接部件。其安全、耐用且防破坏，适用于攀爬网游戏结构中的典型游戏运动。



钢结构的内部和外部均使用无铅热浸镀锌。镀锌在外部环境中具有出色的耐腐蚀性，并且维护成本低。



通过 KOMPAN Variant 团队，您可以在其他 7 种绳索颜色之间进行选择并自定义解决方案。各种各样的颜色，从优雅、富于表现力的黑色，到自然而柔和的麻色，再到一系列引人入胜的醒目色。

产品编号 COR641201-1101

## 安装信息

最大跌落高度	185 cm
安全面积	71.9 m <sup>2</sup>
安装总时长	30.0
开挖量	11.09 m <sup>3</sup>
混凝土使用量	7.06 m <sup>3</sup>
标准入地深度	110 cm
运输重量	1,252 kg
固定选项	入地 ✓

## 质保信息

Corocord 绳索	10 年
镀锌钢结构	终身质保
S 扣	10 年
承保零部件	10 年



# Sustainability Data

COR64120



从原材料到成品	CO <sub>2</sub> 排放总量	CO <sub>2</sub> 排放量 / 千克	回收的原料
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR641201-1101</b>	2,731.78	2.52	30.33

这些因素采用的总体框架为环保产品声明 (EPD), 该声明可量化“产品生命周期的环保信息, 并对相同功能的产品进行对比” (ISO, 2006)。在遵循该框架的同时, 对从原材料到制造的整个产品阶段 (A1-A3) 应用生命周期评估法。

**Kompan A/S**  
C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000




# Bridge with Wooden Slats, 12m


COR64120

最大跌落高度 | 总高度 | 安全区域

最大跌落高度 | 总高度

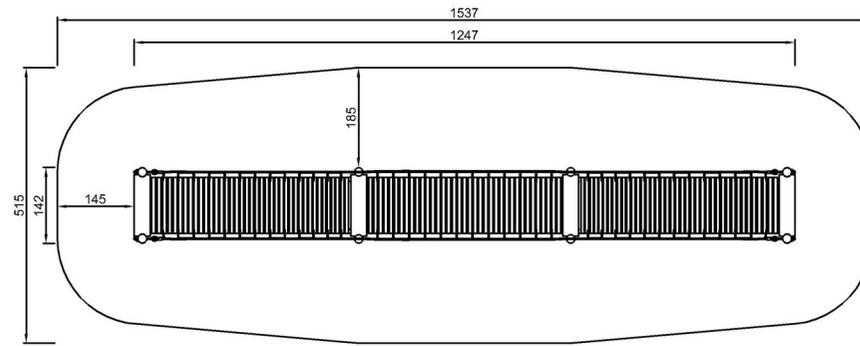

COR641201-xx01  
\*185cm  
\*\*292cm  
\*\*\*71.9m<sup>2</sup>

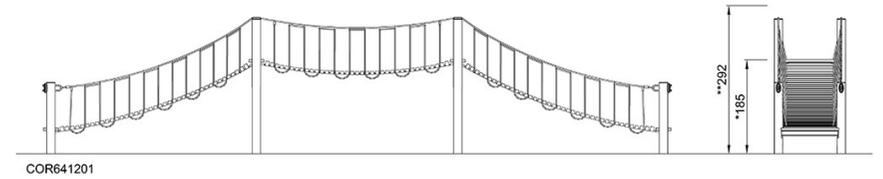

[点击查看俯视图](#)

[点击查看侧面图](#)