CRP251701



General Product Information


Dimensions LxWxH 1064x1267x267 cm


Age group 6+

Play capacity (users) 30

Colour options

Item no. CRP251701-0901

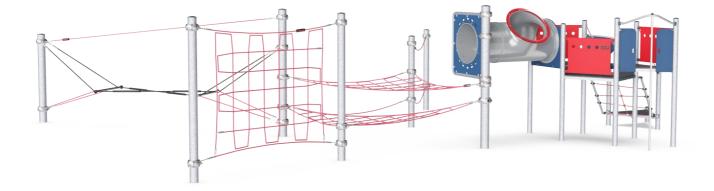



The Lookout Trail is a hugely engaging and versatile play piece that will attract children again and again, for new as well as known physical play activities. The varied climb, crawl and bounce activities invite a wide age span of children. The bouncy, thrilling movements of the varied nets add extra stimulation to children's agility, cross-coordination and

balance skills. These motor skills are fundamental for the ability to navigate the world with body confidence, e.g. in managing street traffic securely. Elements such as the layered horizontal nets and the Galago Trail serve as thrilling, bouncy meeting points that invite children to cooperate, balance and socialise. The Tunnel and Fireman's Pole part of the

structure makes for loops of more classic play activities that never fail to attract, hold and stimulate children in fun play with friends.




CRP251701





# Swaying seesaw

Physical: the Swaying Seesaw is a challenging training of balance, spatial awareness, and timing: to bounce each other up and down is a balance quest that takes handholds, hence the supportive ropes. The skills trained here are fundamental for instance for navigating traffic safely. Social-Emotional: passing others on the bridge intensely trains cooperation and communication skills.

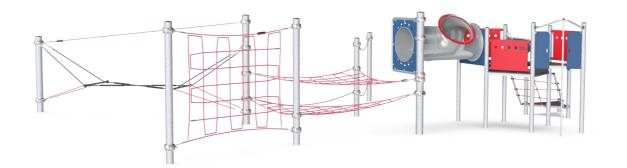



## Climbing net

Physical: the net allows for climbing around, which supports motor skills, proprioception and spatial awareness. Children use muscle strength of arms, legs, and core when climbing.



# Triangular net

Social-Emotional: the net allows for more children being seated or lying together, sharing.









# Vertical climbing net

Physical: children develop cross-body coordination when climbing. Arm, leg and core muscles are strengthened. These are important for posture control and also sitting still. Social-Emotional: the meshes allow for more children to sit together and talk.



**Bubble Tunnel** 



Physical: the children crawl through the

tunnel, developing motor skills such as cross-

body coordination and proprioception. Social-

**Emotional:** turn-taking when passing each

other. Cognitive: distorts the sound of the

voice, developing logical thinking.







## Fireman's pole

Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in early childhood. Social-Emotional: turn-taking and risk-taking.





#### **Balancing ropes**

Physical: holding onto the swaying upper rope when balancing on the swaying lower rope makes excellent training of the sense of balance and trunk muscles. These abilities are fundamental for being able to sit still. Social-Emotional: there is room for more than one and cooperating with friends on walking over the swaying ropes is a true cooperation task that requires teamwork and tolerance.



CRP251701






Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Panels of 19mm FcoCore™. FcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Max. fall height 240 cm Safety surfacing area 107.7 m<sup>2</sup> Total installation time 32.1 Excavation volume 15.18 m<sup>3</sup> Concrete volume 8.26 m<sup>3</sup> Footing depth (standard) 90 cm Shipment weight 1,365 kg Surface Anchoring options In-ground **Warranty Information** 

Item no. CRP251701-0901 **Installation Information** 

# Aluminium clamps 10 years Hot dip galvanised steel Lifetime 10 years Painted toplayer Ropes & nets 10 years Spare parts guaranteed 10 years



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.




All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.



# **Sustainability Data**

CRP251701



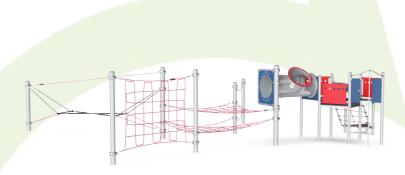

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
CRP251701-0901	3,042.38	3.06	48.33

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

## Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



# Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000

CRP251701



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

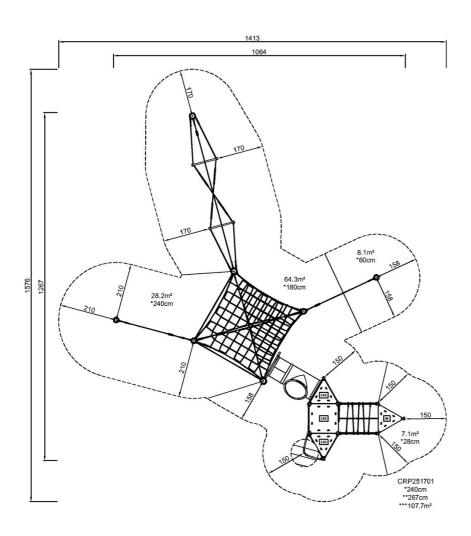



Click to see TOP VIEW

Click to see SIDE VIEW