PCM804





Item no. PCM804-0902

General Product Information

Dimensions LxWxH 3'11"x1'4"x2'6"

Age group 2 - 5

Play capacity (users) 1

Color options









WOW, it moves! The Mini Hammock is a lot of play in a small space. It will instantly attract toddlers, and draw them back again and again. Children love play activities that respond to their movements. Swaying in the hammock helps children to develop coordination and sense of balance, which are fundamental for all other motor skills in infants and toddlers. The

lying position in the hammock adds body pressure: when having the pressure from a solid surface on your full body, the body relaxes. The soothing, swaying movements adds a tranquil feeling. Pushing friends gently back and forth and learning turn-taking are important social-emotional skills for children. For toddlers, there is a cognitive aspect to this

type of play, as they begin to develop concepts of cause and effect related to their bodies and objects.



PCM804





#### Hammock

Physical: coordination and sense of balance when swaying. Social-Emotional: meeting, pushing friends gently back and forth, turntaking. Cognitive: for toddlers cause and effect understanding.



PCM804







Steel posts are galvanized inside and outside with powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world.

Hammock seat is made of PUR. All components retain their properties in the temperature range of -30°C to 60°C. All materials are UV stabilized to a maximum without use of heavy metal stabilities.



Unique KOMPAN swivel suspensions allowing for both swinging and rocking movement of the hammock. The inside housing is made of stainless steel and both the bushing and bearing rod of brass alloy. The outside cover is made of soft TPV rubber and the entire swivel is attached to the steel post by an aluminum connector.

Item no. PCM804-0902				
Installation Information				
Max. fall height		0'9"		
Safety surfacing area		167ft²		
Total installation time		2.7		
Excavation volume	0.	09yd³		
Concrete volume	0.	03yd³		
Footing depth (standard)		2'9"		
Shipment weight		71lbs		
Anchoring options	In-ground	~		
	Surface	•		
Warranty Information				
Post	10	Years		
Spare Parts Availability	10	Years		



Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to ensure excellent wear and tear resistance.

Elevated activities <b>0</b>	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1

ASTM F1487 compliant

# **Sustainability Data**

PCM804





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM804-0902	72.18	2.97	47.99


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Themed play systems

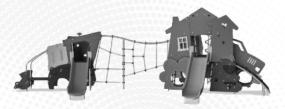

Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Themed play systems" represented by item no.: MSC641100-3717P.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000






\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

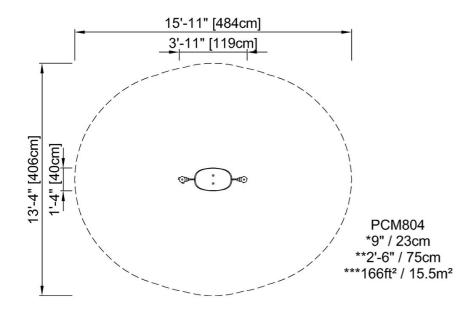

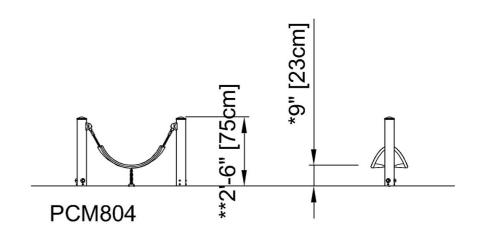

Click to see TOP VIEW

Click to see SIDE VIEW