
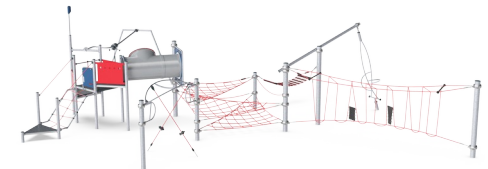


Canopy Trail

CRP251801

| Item no. CRP251801-0901 | |
|-----------------------------|---|
| General Product Information | |
| Dimensions LxWxH | 1064x1602x383 cm |
| Age group | 6+ |
| Play capacity (users) | 34 |
| Color options | ● ● ● |

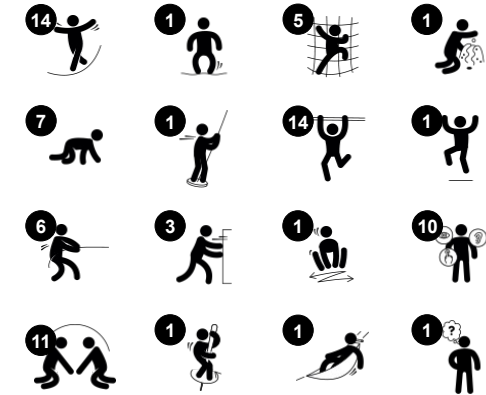

WOW! The Canopy Trail attracts children instantly with its varied range of glide, sway, balance, bounce and climb-and-crawl activities. The trail inspires children of all ages to play here, again and again. The transparent design makes it possible to watch each other through the structure and get inspired for new ways of playing. Agility, balance and coordination are

stimulated e.g. when children swizz through the air on the Track Ride or rocking the Overhead Rocker. This trains upper body muscles, coordination and balance in a fun, voluntary way. Due to the increase in physical inactivity and sedentary lifestyles in older children, this is hugely beneficial to children's health and well-being. Cross-coordination is trained in the

traversing nets, which develop body confidence, whilst the many horizontal nets invite socializing and being active together. This is the favourite way of older children to connect, communicate and cooperate, and make friendships for life.

Canopy Trail


CRP251801



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

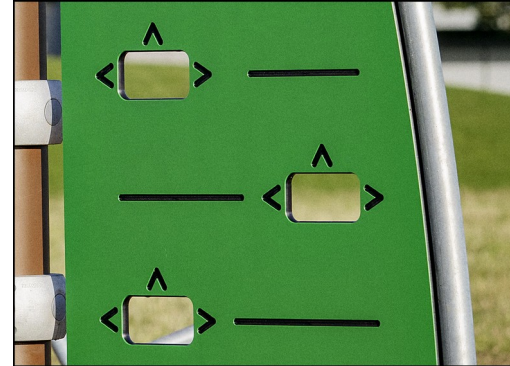

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

| Item no. CRP251801-0901 | |
|--------------------------|--------------------------|
| Installation Information | |
| Max. fall height | 214 cm |
| Safety surfacing area | 142.2 m ² |
| Total installation time | 41.0 |
| Excavation volume | 18.71 m ³ |
| Concrete volume | 10.41 m ³ |
| Footing depth (standard) | 90 cm |
| Shipment weight | 1,958 kg |
| Anchoring options | Surface ✓ In-ground ✓ |



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.



Sustainability Data

CRP251801



| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|-----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| CRP251801-0901 | 4,051.60 | 3.02 | 47.70 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Canopy Trail

CRP251801

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

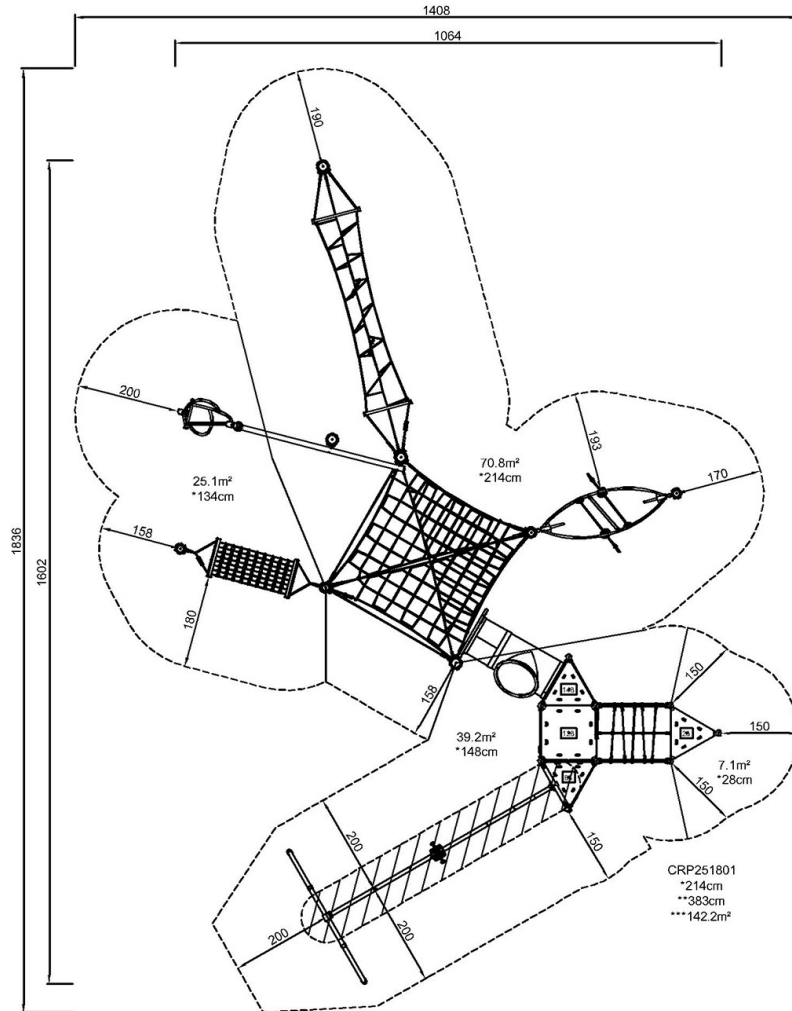

CRP251801

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)