# **Play Tower with 2.5m Swing**

KPL1017



Item no. KPL101722-0902		
General Product Information		
Dimensions LxWxH	461x378x372 cm	
Age group	4+	
Play capacity (users)	5	
Color options		



The play tower with 2.5M swing enhances physical play with opportunities for children to move their bodies in play and come back for more again and again. The structure motivates play by providing a variety of physical, creative and social play. On ground level, a ring game play panel stimulates logican thinking and invites a playful break. The climbing wall climb

strengthens muscles and develops crosscoordination skills. This enhances a child's ability to use both sides of their brain, supporting brain structures that enable reading and thinking. The slide offers immense thrills. It also supports posture and balance, important for young children's body confidence as they grow and learn to navigate the world securely.

Swinging is a favorite playground activity, and it also immensely trains the sense of balance, which is crucial to the ability to sit still and concentrate.



# **Play Tower with 2.5m Swing**




10 years

KPL1017



Panels of 19mm EcoCore<sup>™</sup>. EcoCore<sup>™</sup> is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The main tower posts of either pine wood or aluminium are all equipped with hot dip galvanised steel footings. The steel footings elevates the posts 20mm from ground level to avoid contact with surfacing material.



The large hollow components are made of 100% recyclable PE. The roof displayed is moulded in one piece with minimum 5,5mm wall thickness to ensure high durability in all climates around the world.

Item no. KPL101722-0902		
Installation Information		
14	8 cm	
36.	0 m²	
9.6 h	ours	
1.17 m³		
0.24 m³		
90 cm		
377 kg		
In-ground	~	
Surface	~	
Warranty Information		
15 years		
Lifetime		
10 years		
10 years		
	mation 14. 36. 9.6 h 1.1 0.2 9 37 In-ground Surface nation 15 y Life 10 y	



Floors and panel activities are available in two types of material: Waterproof plywood decks thickness 21.5mm from pine and alder wood with anti-slip film on both sides. High Pressure Laminate HPL thickness 17.8mm with slip resistant surface texture according to EN 438-6.

The slides can be chosen in six different colors and three materials: Straight or curved onepiece molded PE slides, made from 33% recycled post-consumer materials in different colours. Combined EcoCore™ sides and stainless-steel. Full stainless steel in one piece design for more vandalism proof solutions.



Spare parts guaranteed

## **Sustainability Data**

Cradle to Gate A1-A3


KPL101722-0902

KPL1017



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







#### Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

**By Bureau Veritas HSE** www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

738.00

CO2e/kg

kg CO<sub>2</sub>e/kg

2.74

Recycled

materials

%


46.87



KPL1017



604 461 30m²/ \*148cm 796 696 851 378 150 KPL101722 00 \*148cm \*\*372cm \*\*\*36m<sup>2</sup> 20 6m<sup>2</sup> \*100cm

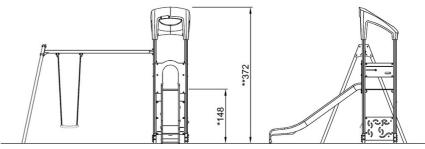

\* Max fall height | \*\* Total height

KPL101722

Click to see SIDE VIEW

Click to see TOP VIEW