Movable Hammocks

PCM701



Item no. PCM701-0902				
General Product Information				
Dimensions LxWxH	331x243x65 cm			
Age group	4+			
Play capacity (users)	6			
Colour options	\bullet			





Socialising in a nice framework is a favourite occupation of school age children. These hammocks allow for flexible meetings, offering varied seating on the bar, on the seats and not least in the gently swaying hammocks. The hammocks can be pushed closer to each other or further apart to suit varied play scenarios and the whole unit allows for being used seated, lying, or standing, thus allowing for users across ages, abilities and different group sizes to meet and interact.





Data is subject to change without prior notice.



PCM701





Movable hammock

Physical: sense of balance when swaying, body pressure when lying. Support users lying or seated. Social-Emotional: meeting, pushing friends gently back and forth, turntaking. Creative: changing direction and position of hammock.



Movable Hammocks



PCM701



Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Steel posts are galvanised inside and outside

ultimate corrosion resistance in all climates

around the world.

with powder coated top finish. This provides an



The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.

Item no. PCM701-0902		
Installation Information		
Max. fall height	5	9 cm
Safety surfacing area	23.	2 m²
Total installation time	5.2 h	ours
Excavation volume	0.1	6 m³
Concrete volume	0.0	6 m³
Footing depth (standard)	90	0 cm
Shipment weight	11	6 kg
Anchoring options	In-ground	~
	Surface	~
Warranty Information		
EcoCore HDPE	Life	time
Membrane	2 у	ears
Post	10 y	ears
Ropes & nets	10 y	ears
Spare parts guaranteed	10 y	ears



Belt seat is made of PUR. All components retain their properties in the temperature range of -30°C to 60°C. All materials are stabilised to a maximum without use of heavy metal stabilities.



Sustainability Data

PCM701



Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM701-0902	287.87	3.18	53.98

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Park



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Park" represented by item no.: PAR4070-0001.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mind

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



Data is subject to change without prior notice.

+45 7731 1000

By Bureau Veritas HSE

www.bureauveritas.dk




PCM701

* Max fall height | ** Total height | *** Safety surfacing area



* Max fall height | ** Total height

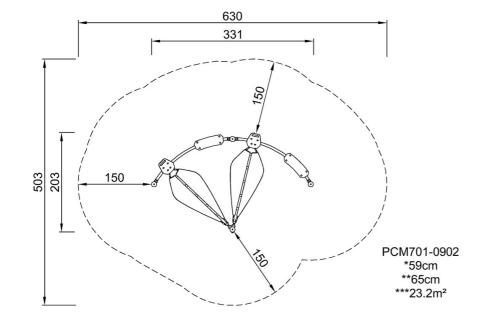



PCM701-0902

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 06/28/2025