Ice Cream Cart

PCM52431



Item no. PCM52431-0901				
General Product Information				
Dimensions LxWxH	279x119x187 cm			
Age group	2+			
Play capacity (users)	9			
Colour options	•			







popular make-believe play of all: Trading and playing shop. The richness of themed and tactile, moving play elements support dramatic play and conversations. They spur cooperation, thus paving the way for social understanding and friendships. When children explore the functionality of for instance the rubber flaps and

The sweat Ice Cream Cart inspires the most

put items through the holes in the desk, or when the run the flowers in the grooves of the flower bush, it is not solely great explorative play. It also trains children's understanding of cause-and -effect, their understanding of object permanence and their logical thinking skills. The dramatic play scenarios, playing ice cart, trains communication and language skills.

KOMPA

Ice Cream Cart

PCM52431





Bench Social-Emotional: invites socializing and cooperation. Allows for a break with friends.





Abacus Cognitive: supports understanding of measures.



Desk flaps w. holes

Social-Emotional: cooperation, turn-taking and parallel play inspired by the two flaps. **Cognitive:** shifting things through holes to shelf supports logical thinking and understanding of object permanence.



Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.



Flower panel

Social-Émotional: invites cooperation due to the two-sidedness. Cognitive: the tangible theme stimulates language and communication skills. Creative: children can leave their mark, placing the flowers in different positions.



Desk

Social-Emotional: fine meeting place and a space creator. Sharing and cooperation from both sides to create a social scenario that supports communication and cooperation.

Ice Cream Cart


PCM52431



Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of a core produced from 100% recycled material.



Main posts with hot dip galvanized steel footing are available in different materials: Pregalvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. TexMade posts of 95% post-consumer recycled PE and textile waste.



The steel surfaces are hot-dip galvanised inside and outside with lead-free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

Item no. PCM52431-0901					
Installation Information					
Max. fall height		0 cm			
Safety surfacing area	16.	7 m²			
Total installation time		8.3			
Excavation volume	0.1	6 m³			
Concrete volume	0.0	0 m³			
Footing depth (standard)	90	0 cm			
Shipment weight	16	62 kg			
Anchoring options	Surface 🗸				
	In-ground	~			
Warranty Information					
EcoCore HDPE	Life	etime			
Galvanised Steel	Life	etime			
Post	10 y	ears			
Spare Parts Guarantee	10 y	ears			



Sustainability Data

PCM52431


Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM52431-0901	173.33	1.55	77.35

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



Data is subject to change without prior notice.





PCM52431

* Max fall height | ** Total height | *** Safety surfacing area

KOMPAN Let's play

* Max fall height | ** Total height

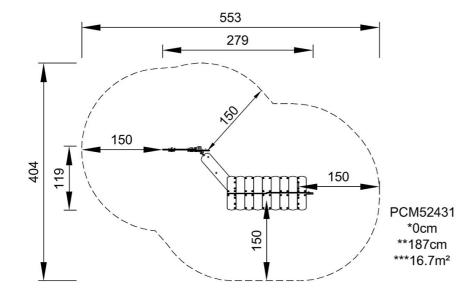

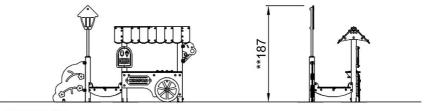

PCM52431

Click to see TOP VIEW

5 / 01/03/2025