Railway Carriage

M526




| Item no. M52670-3417P | | | | |
|-----------------------------|----------------|--|--|--|
| General Product Information | | | | |
| Dimensions LxWxH | 297x123x165 cm | | | |
| Age group | 6m+ | | | |
| Play capacity (users) | 8 | | | |
| Color options | •• | | | |





Ŀ

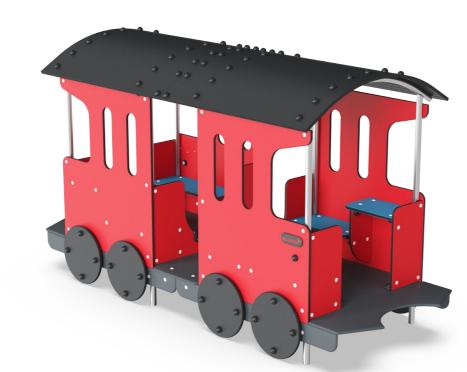

"I want to go on the train!" The roomy Railway Carriage attracts children with its appealing theme of travel. The train theme is a great play starter that will have children stay for a long time, describing where they'll go next. This can unite in play across generations. The storytelling dimension of dramatic play is hugely present in the Railway Carriage. This stimulates language development and logical thinking skills when sequencing stories correctly in time. The lovely compartments with blue seats spur numerous social games, when children define my space and your space. The open platforms at the rear and front allow for seating, too. The transparent design makes it possible for children to participate in play from the outside of the Railway Carriage, too. It also facilitates informal adult supervision.

Railway Carriage



M526





Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

| Item no. M52670-3 | 8417P | | | | |
|--------------------------|-----------|-------|--|--|--|
| Installation Information | | | | | |
| Max. fall height | 2 | 8 cm | | | |
| Safety surfacing area | 22. | 1 m² | | | |
| Total installation time | | 12.4 | | | |
| Excavation volume | 0.4 | 4 m³ | | | |
| Concrete volume | 0.0 | 0 m³ | | | |
| Footing depth (standard) | 6 | 0 cm | | | |
| Shipment weight | 44 | l2 kg | | | |
| Anchoring options | In-ground | ~ | | | |
| | Surface | ~ | | | |
| | | | | | |



Edge protection is made of PUR. It retains its properties in the temperature range of -30°C to 60°C. Material is UV stabilised.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor such as EcoCoreTM panels of +95% post consumer recycled ocean waste.



Sustainability Data

M526





| Cradle to Gate A1-A3 | Total CO ₂ emission | CO₂e/kg | Recycled materials | |
|----------------------|--------------------------------|------------|--------------------|--|
| | kg CO₂e | kg CO₂e/kg | % | |
| M52670-3417P | 545.10 | 1.61 | 58.50 | |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))





M526





* Max fall height | ** Total height

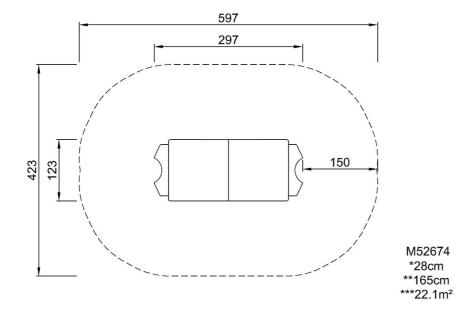

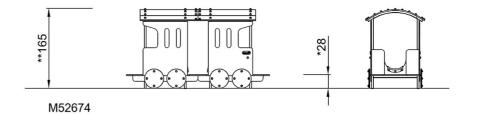

Click to see TOP VIEW

4 / 04/22/2024