


# Bicycle Stand

PAR3001



Item no. PAR3001-0401	
<b>General Product Information</b>	
Dimensions LxWxH	23x6x85 cm
Age group	-
Play capacity (users)	-
Colour options	



We are in the great bicycle revolution. Fuelled by a green and healthy way of commuting, cities globally are rethinking how to make it easier to cycle. The new stands are compact, stylish, and can accommodate every type of bike and lock.

# Bicycle Stand

PAR3001




The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outdoor environments and require low maintenance. Painted steel parts are hot dip galvanized before powder coating.



Powder coated top finish on top of galvanisation is processed in two steps: Light grinding and clean sweeping, powder coating - thickness 70-120 µm.



Minimalist and robust, the stands are bike friendly with no damaging sharp edges. The Stands can accommodate every type of bike and lock.

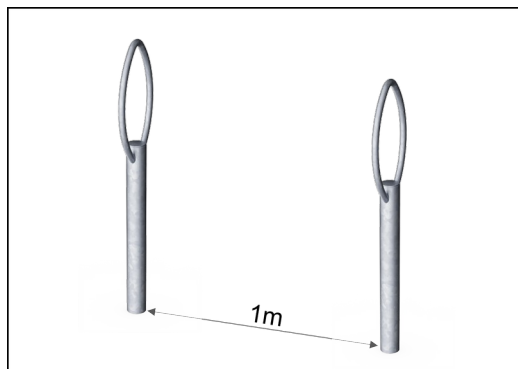

The bicycle stand has a capacity of two bicycles and when placed in line the recommended distance from stand to stand is 1000mm

Item no. PAR3001-0401

## Installation Information

Total installation time	0.1
Excavation volume	0.05 m <sup>3</sup>
Concrete volume	0.05 m <sup>3</sup>
Footing depth (standard)	40 cm
Shipment weight	7 kg
Anchoring options	In-ground ✓

## Warranty Information

Hot dip galvanized steel	Lifetime
Painted toplayer	10 years
Spare parts guaranteed	10 years

# Sustainability Data

PAR3001




Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
PAR3001-0401	15.46	2.57	50.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Park

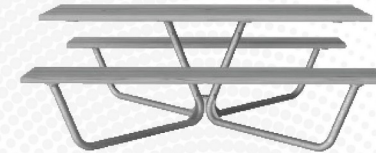

Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Park" represented by item no.: PAR4070-0001.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

**By Bureau Veritas HSE**  
 www.bureauveritas.dk  
 +45 7731 1000

