## Horse


PCM105





Rocking on the Horse is a wildly attractive playground activity. Children are able to control the play by moving their bodies to make the horse rock. They will feel delighted to have the horse respond to their movements. The two sides support the seated position, and the foot and hand holds provide a stable point to stem feet and hands from, to create the movement.

The springer is also good for physical and cognitive development. When children begin to learn the connections between their bodies and their movements, they begin to make cognitive connections to a range of body movements and sensations. The horse theme will inspire children's imagination, and will encourage wonderful physical and imaginative play.















## Horse

PCM105





## Handhold

**Physical:** the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.









### Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



### Foot support

Physical: the possibility of footrest supports intensive rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely.





#### Theme

**Cognitive:** suggests a theme and supports dramatic play, which stimulates language and communication skills.

## Horse

PCM105





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

| Installation InformationMax. fall height60 cmSafety surfacing area7.4 m²Total installation time2.1Excavation volume0.17 m³Concrete volume0.00 m³Footing depth (standard)42 cmShipment weight29 kgAnchoring optionsIn-ground ✓<br>Surface ✓Warranty InformationEcoCore HDPELifetimeSpare parts guaranteed10 yearsSprings5 years | Item no. PCM105-0401     |           |       |  |  |
|--|--------------------------|-----------|-------|--|--|
| Safety surfacing area 7.4 m² Total installation time 2.1 Excavation volume 0.17 m³ Concrete volume 0.00 m³ Footing depth (standard) 42 cm Shipment weight 29 kg Anchoring options In-ground ✓ Surface ✓  Warranty Information  EcoCore HDPE Lifetime Spare parts guaranteed 10 years   | Installation Inform      | mation    |       |  |  |
| Total installation time 2.1  Excavation volume 0.17 m³  Concrete volume 0.00 m³  Footing depth (standard) 42 cm  Shipment weight 29 kg  Anchoring options In-ground ✓ Surface ✓  Warranty Information  EcoCore HDPE Lifetime  Spare parts guaranteed 10 years  | Max. fall height         | 6         | 0 cm  |  |  |
| Excavation volume 0.17 m³ Concrete volume 0.00 m³ Footing depth (standard) 42 cm Shipment weight 29 kg Anchoring options In-ground ✓ Surface ✓  Warranty Information  EcoCore HDPE Lifetime Spare parts guaranteed 10 years  | Safety surfacing area    | 7         | .4 m² |  |  |
| Concrete volume 0.00 m³ Footing depth (standard) 42 cm Shipment weight 29 kg Anchoring options In-ground ✓ Surface ✓  Warranty Information  EcoCore HDPE Lifetime Spare parts guaranteed 10 years  | Total installation time  |           | 2.1   |  |  |
| Footing depth (standard)  Shipment weight  Anchoring options  In-ground Surface  Warranty Information  EcoCore HDPE  Spare parts guaranteed  42 cm  42 cm  42 cm  42 cm  42 cm  42 cm  Lifetime  | Excavation volume        | 0.1       | 17 m³ |  |  |
| Shipment weight 29 kg Anchoring options In-ground Surface   Warranty Information  EcoCore HDPE Lifetime Spare parts guaranteed 10 years  | Concrete volume          | 0.0       | 00 m³ |  |  |
| Anchoring options In-ground ✓ Surface ✓  Warranty Information  EcoCore HDPE Lifetime Spare parts guaranteed 10 years   | Footing depth (standard) | 4         | 2 cm  |  |  |
| Surface  Warranty Information  EcoCore HDPE Lifetime Spare parts guaranteed 10 years   | Shipment weight          | 2         | 29 kg |  |  |
| Warranty Information  EcoCore HDPE Lifetime  Spare parts guaranteed 10 years   | Anchoring options        | In-ground | ~     |  |  |
| EcoCore HDPE Lifetime Spare parts guaranteed 10 years  |                          | Surface   | ~     |  |  |
| Spare parts guaranteed 10 years  | Warranty Information     |           |       |  |  |
|  | EcoCore HDPE             | Lifetime  |       |  |  |
| Springs 5 years  | Spare parts guaranteed   | 10 years  |       |  |  |
|  | Springs                  | 5 years   |       |  |  |



Handle is made of polypropylene PP with excellent impact strength and usable within a large temperature span.



Seat is made of Ekogrip™ panel that consist of a 15mm thick PE base with 3 mm top-layer of soft rubber with a non-skid effect.



# **Sustainability Data**

PCM105





| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO₂e/kg    | Recycled materials |
|----------------------|--------------------------------|------------|--------------------|
|                      | kg CO₂e                        | kg CO₂e/kg | %                  |
| PCM105-0401          | 69.76                          | 2.56       | 45.33              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



## Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mode

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023




PCM105




\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

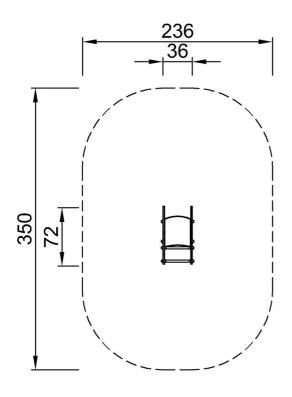

PCM105 \*60cm \*\*73cm \*\*\*7.4m<sup>2</sup>



Click to see TOP VIEW

Click to see SIDE VIEW