


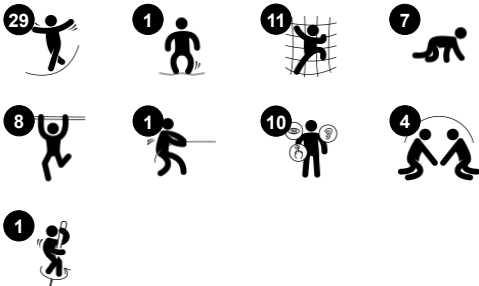
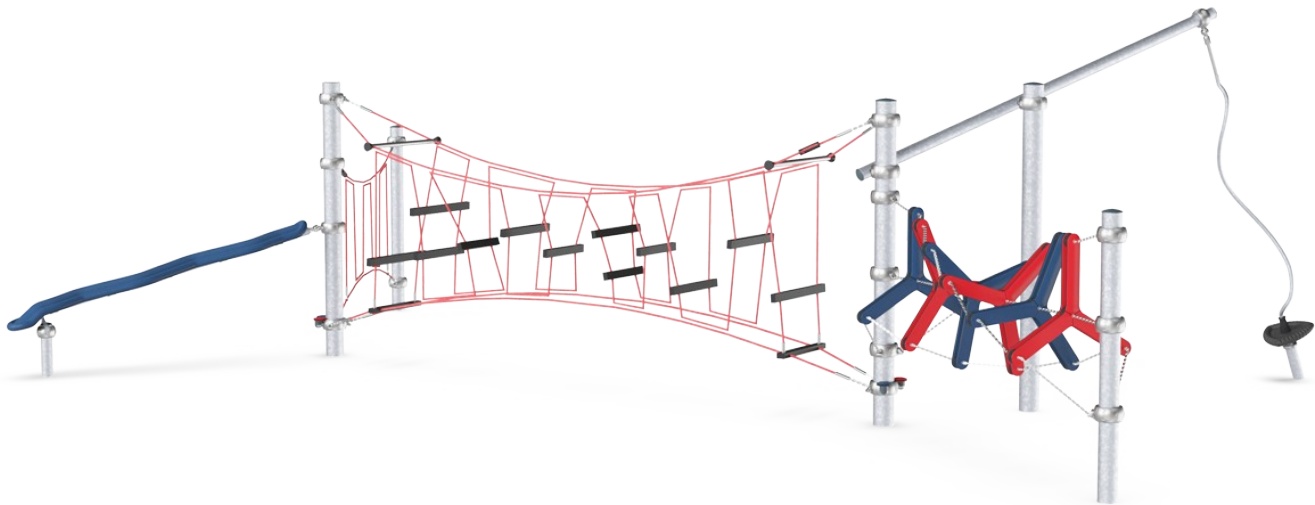
Chimpanzee Trail

CRP250401

Item no. CRP250401-0901

General Product Information


| | |
|-----------------------|---|
| Dimensions LxWxH | 1008x653x326 cm |
| Age group | 5 - 12 |
| Play capacity (users) | 16 |
| Colour options |    |



The Chimpanzee Trail is great for socializing and attracts play instantly, also for older children! Climbing through the structure intensely trains agility, balance and coordination, the ABC of motor skills, in an immensely fun way. The Satellite Spinner invites wild spins for lots of children and the Zig-Zag Slider provides a really challenging

climb up and down. The spinning, apart from being great fun, helps train balance, a motor skill which is fundamental for e.g. sitting still. Turn-taking, communication and cooperation abilities are practiced when passing friends, navigating from one end to the other. The Frames, Hurdles and Zig-Zag Slider also make perfect natural resting points and encourage

socializing and meetings. This makes the Chimpanzee Trail a highly versatile play piece that invites both physical and social activity.

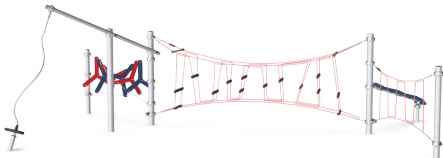



Chimpanzee Trail

CRP250401



Zig-zag slider

Physical: muscle strength, balance and coordination when climbing up and down, holding tight.

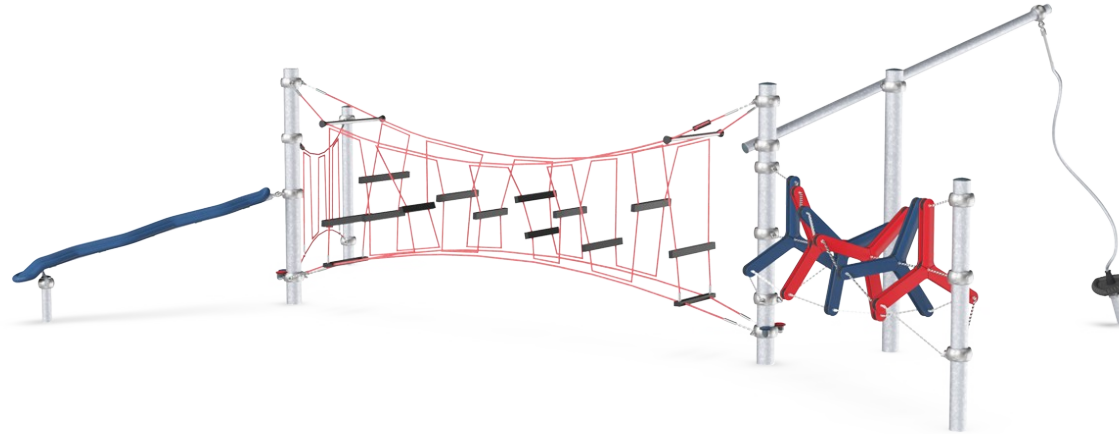

Hurdles

Physical: arm, leg and core muscles are developed when climbing up or through. Balance and spatial awareness, motor skills that help in judging the body in space. **Social-Emotional:** cooperation and turn-taking when passing one another.



Propeller climber

Physical: support agility, balance and coordination when climbing through. These are important motor skills for moving your body confidently. Arm, leg and core muscles are trained when climbing through the propellers. **Social-Emotional:** children cooperate, turn-take and consider each other when they climb through the frames. The frames support playful socializing and meetings for groups of children.



Satellite spinner

Physical: balance when standing, sitting and rotating, muscles develop when holding tight. **Social-Emotional:** turn-taking, socializing. **Cognitive:** logical thinking, figuring out how to make the spinner work with gravity, not against it.

Chimpanzee Trail


CRP250401



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

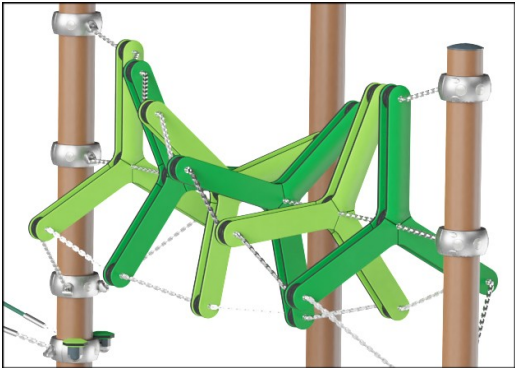

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

| | |
|--------------------------|--------------------------|
| Item no. CRP250401-0901 | |
| Installation Information | |
| Max. fall height | 240 cm |
| Safety surfacing area | 90.3 m² |
| Total installation time | 21.5 |
| Excavation volume | 12.20 m³ |
| Concrete volume | 7.31 m³ |
| Footing depth (standard) | 90 cm |
| Shipment weight | 924 kg |
| Anchoring options | Surface ✓ In-ground ✓ |
| Warranty Information | |
| Aluminium clamps | 10 years |
| Hot dip galvanised steel | Lifetime |
| Painted toplayer | 10 years |
| Ropes & nets | 10 years |
| Spare parts guaranteed | 10 years |



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Rocking tube is made of medium density PE with excellent impact strength and usable within a large temperature span. Hollow plastic components are made of 100% recyclable PE made from 33% post-consumer materials. Molded in one piece with minimum 5mm wall thickness. The longitudinal grooves provides a slip resistant surface for safe play.




Heavy duty engineered bearing system with single row deep groove ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and maintenance free.

| Elevated activities 0 | Accessible elevated activities | Accessible ground level activities | Accessible ground level play types |
|-----------------------|--------------------------------|------------------------------------|------------------------------------|
| Present | 0 | 1 | 1 |
| Required | 0 | 1 | 1 |

CSA
Z614
compliant

Sustainability Data

CRP250401

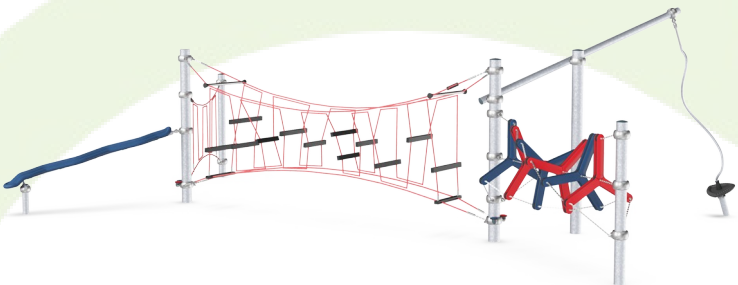

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| CRP250401-0901 | 2,135.35 | 3.11 | 49.93 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025
Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Chimpanzee Trail

CRP250401

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

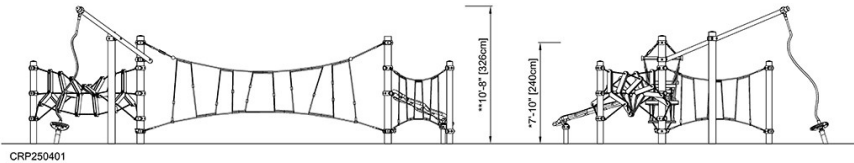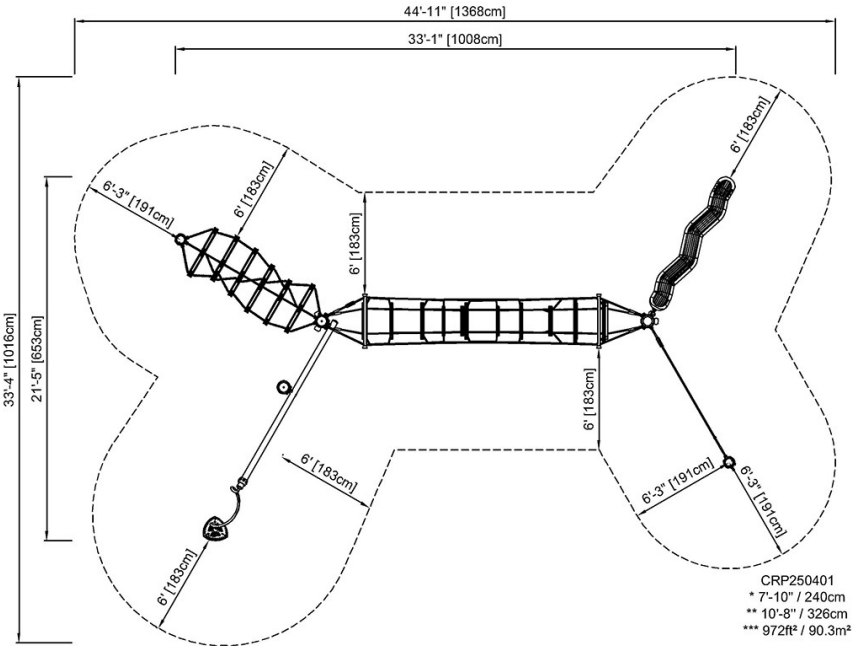

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)