



# Circite

COR46330

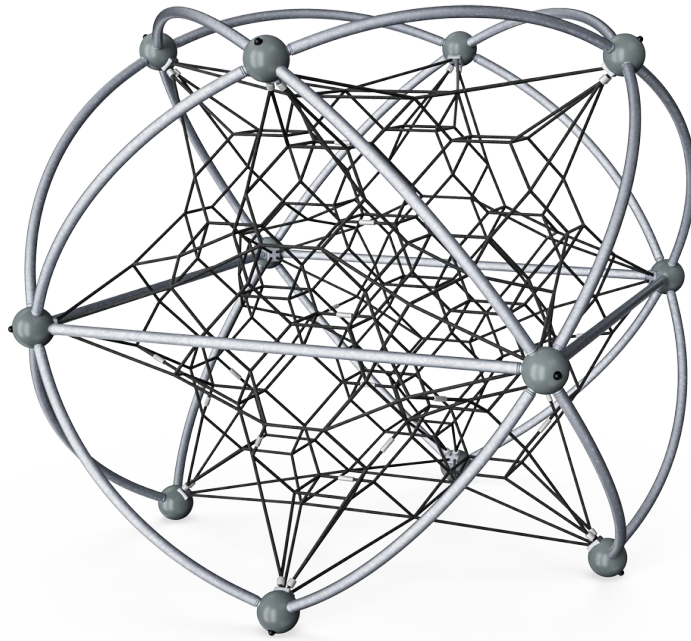


Item no. COR463301-0406	
<b>General Product Information</b>	
Dimensions LxWxH	13'7"x13'7"x10'3"
Age group	2 - 5
Play capacity (users)	30
Color options	

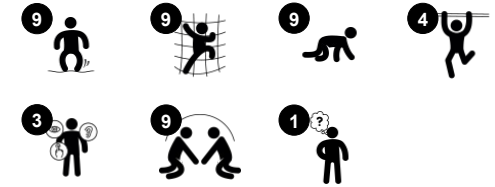


The Circite is an immense three-dimensional rope environment in which the child can move freely in all directions. The numerous ways of climbing ensure hours of play and attract children again and again. The Circite is transparent and this facilitates communication across and through the net. The bouncy interconnected nets translates the movement

of all the climbers to each other. This strengthens concentration and major muscle groups as children hold tight when climbing up, down and around the net. This supports important motor skills such as proprioception and cross-body coordination. These skills are fundamental for coordinating the cooperation of the left and right brain half, which is necessary

for other skills such as literacy. All of this takes place in a graded play structures with rich play events.



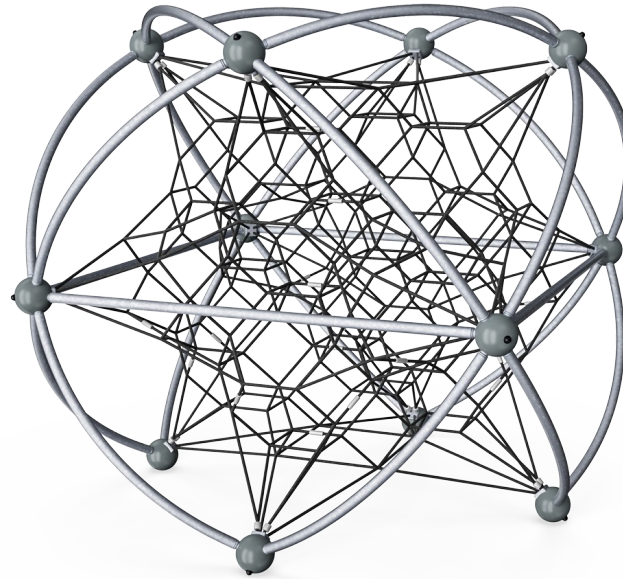

## Height

**Social-Emotional:** children develop courage and self-regulation when being up high. This positively impacts self-confidence.



## Big meshes

**Physical:** the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. **Social-Emotional:** allow more children being seated together, sharing.



## Connected nets

**Physical:** the connected nets make the climbers feel the movements of the others, adding a dimension of fun and demanding concentration when holding tight to the rope. Cross-coordination and all muscle groups are trained. **Social-Emotional:** the climbers' movements affect the other climbers, so consideration and turn-taking is supported.



## Transparency

**Social-Emotional:** the transparency makes cooperation and communication possible throughout, important life-skills for children to practice.

# Circite


COR46330



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope climbing structures.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

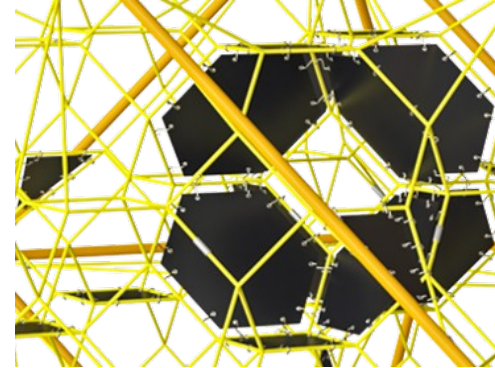


Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.

Item no. COR463301-0406	
Installation Information	
Max. fall height	9'10"
Safety surfacing area	456ft <sup>2</sup>
Total installation time	20.6
Excavation volume	2.3yd <sup>3</sup>
Concrete volume	1.28yd <sup>3</sup>
Footing depth (standard)	3'11"
Shipment weight	1202lbs
Anchoring options	In-ground ✓
Warranty Information	
Corocord Rope	10 Years
EcoCore HDPE	Lifetime
Hot dip galvanized steel	Lifetime
S-Clamps	10 Years
Spare Parts Availability	10 Years



The steel struts are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.

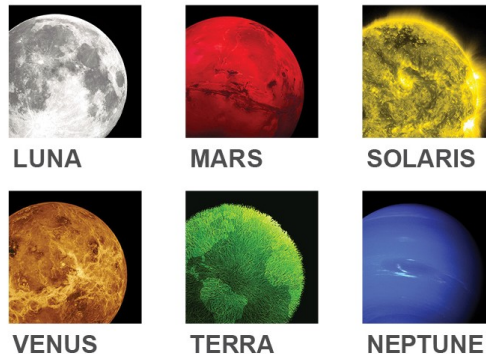


The COROCORD Frame Nets are available in 6 galactic color themes. The themes draw on bright colors that appeal to children of all ages. Can be changed in the configurator.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



# Sustainability Data

COR46330

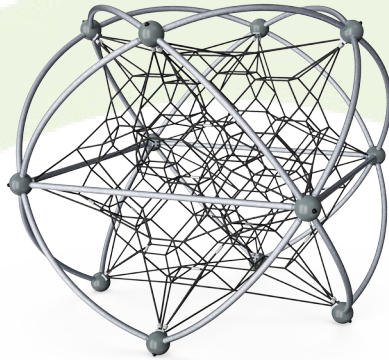

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR463301-0406</b>	1,751.25	3.82	44.82

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.



**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

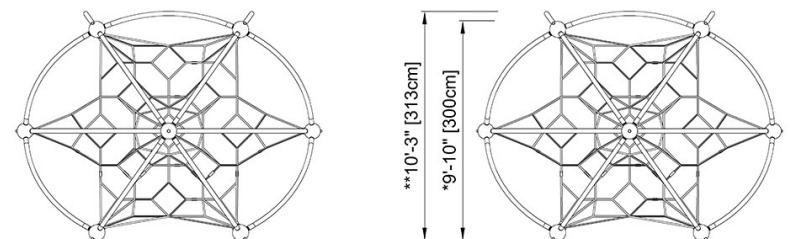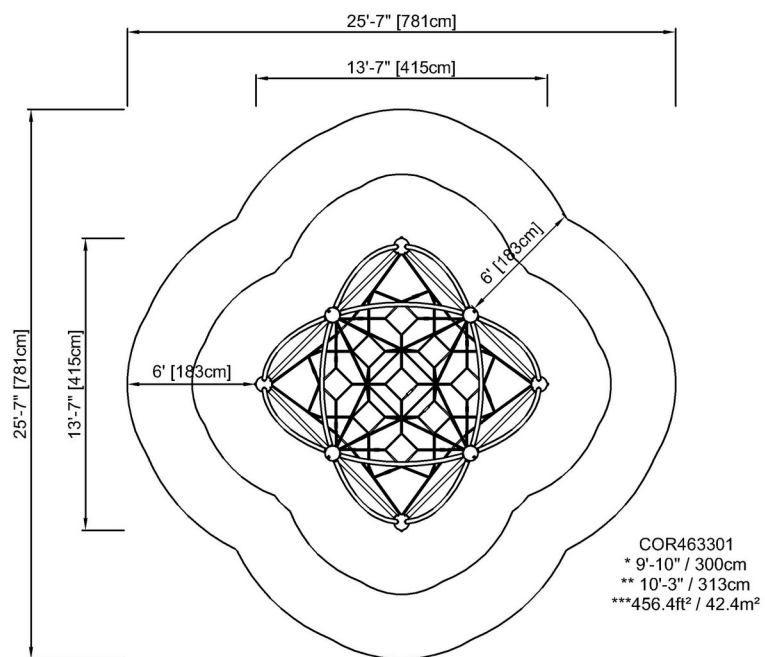

COR463301

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)