M175





Item no. M17501-01P

#### **General Product Information**

Dimensions LxWxH 104x104x61 cm
Age group 2 - 5
Play capacity (users) 4
Colour options









WOW it's play time for toddlers. Under 5s will be thrilled by the social and physical potential of the Water Lilies: 1, 2, 3 or 4 children can seesaw, play and cooperate at the same time. This makes the Waterlilies a highly versatile play unit, taking up little space and appealing to toddlers again and again. Apart from being great play, the Water Lilies support

fundamental areas of childrens' development and learning through play: important motor skills such as balance and proprioception get trained when children rock, pushing their feet and pulling their arms. These are fundamental to life skills in later life. While rocking together, toddlers additionally train important socialemotional skills such as cooperation. The logic of movement sequence trains the child's thinking skills. The Water Lilies are true playful learning.



M175





Rocking together Social-Emotional: the possibility of rocking two together trains cooperation skills. Consideration of others when rocking.







#### Handhold

**Physical:** the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.







#### Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



#### Foot support

Physical: the possibility of footrest supports intensive rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely.

M175





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

Item no. M17501-01P					
Installation Information					
Max. fall height		50 cm			
Safety surfacing area	1	17.8 m²			
Total installation time		3.0			
Excavation volume	(	).19 m³			
Concrete volume	(	0.00 m³			
Footing depth (standard)		45 cm			
Shipment weight		54 kg			
Anchoring options	In-ground	ı ~			
	Surface	~			
Warranty Information					
EcoCore HDPE	L	ifetime.			
HPL decks	15	5 years			
Spare parts guaranteed	10	) years			
Springs	ţ	5 years			



Handholds are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.



Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.



Steps are made of PUR. It retains their properties in the temperature range of -30°C to 60°C. Step is stabilised to a maximum without use of heavy metal stabilities.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



# **Sustainability Data**

M175





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000



Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
M17501-01P	134.77	2.71	27.16


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))






\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

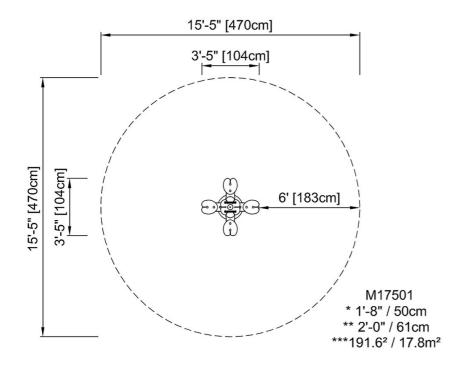

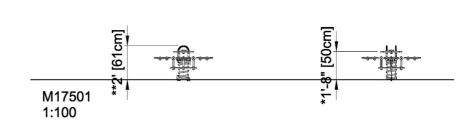

Click to see TOP VIEW

Click to see SIDE VIEW