

# Triple Jump

FSW41200

**KOMPAN**<sup>®</sup>



Varenr. FSW41200-0001

## Generel produktinformation

Dimensioner LxBxH	114x120x74 cm
Alder	13+
Kapacitet (brugere)	3
Farvemuligheder	




The Triple Jump is a simple yet versatile device. With three different step heights and a slip-resistant surface, it provides a challenge for users of all sizes and fitness levels. It is ideal for various types of cardio-stepping and a wide range of lower-body strength exercises.

# Triple Jump

FSW41200

**KOMPAN**

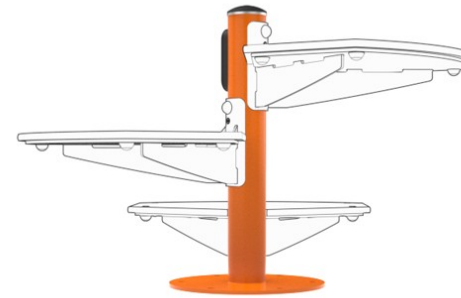

Alle KOMPANs fitnessprodukter er i overensstemmelse med ASTM F3101 & EN16630 Udendørs Fitnessstandarder. Belastningstest udføres som en statisk test ved at tilføje dynamiske faktorer såvel som sikkerhedsfaktorer til den specificerede belastning på 78 kg pr. bruger. Et produkt beregnet til én bruger læsses med 420 kg.

Informationsskiltet er lavet af en PA6 (polyamid) og viser den mest relevante øvelse og en QR-kode. QR-koden linker til en illustration af øvelsen og giver muligheden for at downloade KOMPANs sport & fitness App, som vil give en stor mængde øvelser og træning.

Stolperne er Ø101,6 x 2 mm og er lavet af forgalvaniseret og pulverlakeret kulstofstål. Dette giver en god beskyttelse i alle klimaer.




Varenr. FSW41200-0001

## Installationsinformation

Maks. faldhøjde	60 cm
Faldområde	14,5 m <sup>2</sup>
Installationstid (timer)	0,0 timer
Udgravningsmængde	0,00 m <sup>3</sup>
Betonmængde	0,00 m <sup>3</sup>
Forankringsdybde	0 cm
Fragtvægt	0 kg
Forankringsmuligheder	

## Garanti

Stolpe	10 år
Galvaniseret stål	Livstid
EcoCore HDPE	Livstid
Garanterede reservedele	10 år

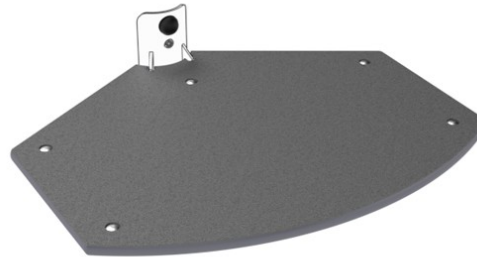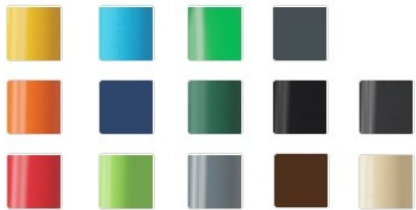

KOMPANs fitnessprodukter fås som standard i orange, antracitgrå, mellemgrå, mørkegrå, mørkeblå, lyseblå, gul, rød, sort, mørkegrøn, limegrøn, mellemgrøn, sand og brun. Alle andre RAL-farver fås på anmodning. Det vil altid være muligt at matche omgivelserne eller farvetemaet!

Toppladen til springplatformen er fremstillet af Ekogrip®-paneler, der består af et 15 mm tykt bundlag af polyethylen og et 3 mm tykt top lag af termoplastisk gummi. Toplaget har en skridsikker effekt, som sikrer trygge springøvelser under alle vejrforhold.

The triple jump platform integrates three jump heights at 20, 40 and 60 cm into one compact structure, delivering multiple training options while minimizing the overall footprint.

**EN**  
**16630**  
compliant

# Bæredygtighedsdata

FSW41200



## Independent review certificate

Kompan A/S  
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO<sub>2</sub>e-calculations (covering materials, processing, waste and transport) done by Kompan for "Fitness", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO<sub>2</sub>e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO<sub>2</sub>e.

### Object

The verification has been done on the one pager "FAZ10100-0900" version: 27-10-2025. The supporting documentation "KOMPAN data\_updated emissions factors\_2025\_V2" and "Emissions factors, EPD's and ecoinvent 3.11\_2025" was also reviewed and approved.

### Declaration

The review has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO<sub>2</sub>e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

**Note:** This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

**Ref.:** Kompan\_Verification report 2025, 28-10-2025

**Date of certificate:** 29-10-2025

**Expire date:** 29-10-2027

**Verified by:** Julie Marie Vejsgaard Larsen, Environmental Auditor

**Signature:**

Vugge-til-port A3	A1-	Total CO <sub>2</sub> udled- ning	CO <sub>2</sub> e/kg	Genan- vendte mate- rialer
		kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
FSW41200-0001		0,00	0,00	0,00


Den overordnede ramme for disse faktorer er Environmental Product Declaration (EPD), som kvantificerer "miljøoplysninger om et produkts livscyklus og muliggør sammenligninger mellem produkter, der opfylder samme funktion" (ISO, 2006). Dette følger strukturen og anvender en livscyklusvurderingstilgang til hele produktfasen fra råvarer til fremstilling (A1-A3))

# Triple Jump


FSW41200

\* Maks. faldhøjde | \*\* Samlet højde | \*\*\* Faldområde

\* Maks. faldhøjde | \*\* Samlet højde

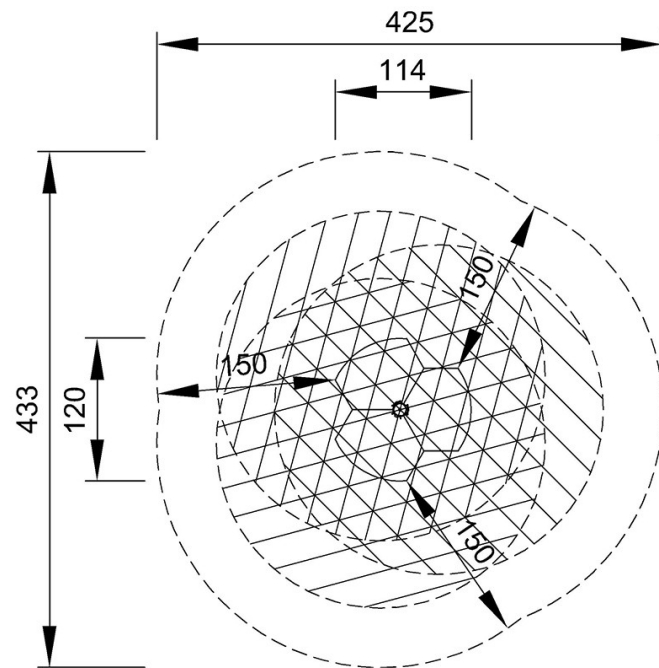

FSW41200  
\*60cm  
\*\*74cm  
\*\*\*14.5m<sup>2</sup>

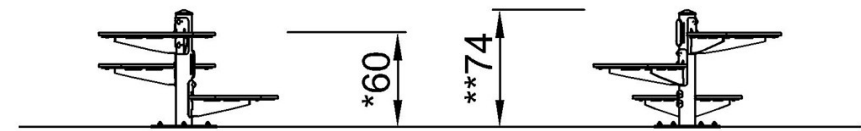

FSW41200

[Klik for at se FRA OVEN](#)

[Klik for at se FRA SIDEN](#)