

# Meadow Trail

CRP200601

Item no. CRP200601-0901

## General Product Information

Dimensions LxWxH	1053x427x341 cm
Age group	2+
Play capacity (users)	25
Color options	



The fun Meadow Trail hugely attracts children to come play, again and again. Climbing, crawling, balancing, sliding, swaying, meeting and imaginative play all find room in the Meadow Trail. Cute play panels spur children's imagination, with curtains to draw and houses to visit. Dramatic play is one of the best stimulations of children's language

development. The richly varied active play opportunities train children's motor skills and muscles, building up the confidence of the youngest in moving and navigating the world securely. The nets and the climbing, especially in the Hurdle net and the Spider net, support cross-body coordination and the incorporation of space, shapes and measures that are

fundamental for mathematical thinking. The rich number of gathering point and the many varied movements supported in play makes the Meadow Trail an absolute favourite of toddlers and their friends and families in the playground.




Data is subject to change without prior notice.

# Meadow Trail


CRP200601



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.

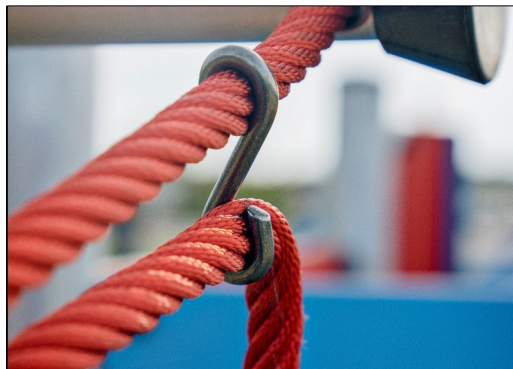

Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

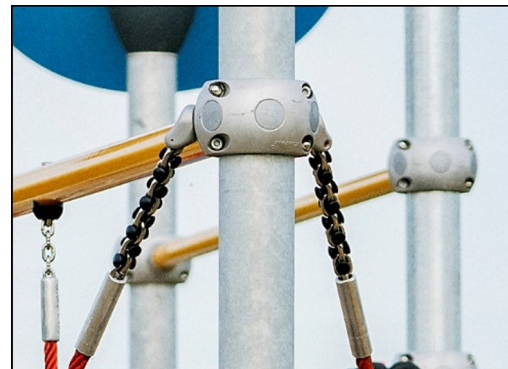

Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

Item no. CRP200601-0901

### Installation Information

Max. fall height	88 cm
Safety surfacing area	72.7 m <sup>2</sup>
Total installation time	34.8
Excavation volume	5.44 m <sup>3</sup>
Concrete volume	2.50 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	1,227 kg
Anchoring options	



The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The slides can be chosen in six different colors and three materials: Straight or curved one-piece molded PE slides, made from 33% recycled post-consumer materials in different colours. Combined EcoCore™ sides and stainless-steel. Full stainless steel in one piece design for more vandalism proof solutions.

**EN  
1176**  
compliant

# Sustainability Data

CRP200601



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>CRP200601-0901</b>	2,288.70	2.61	55.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





