
FPW227





The Balance station trains ankle strength and stability. The four items in the station will have different difficulty levels that allows for progression and a challenge for every user type. At the same time, the placement of the four stations around the ring invites to moderate social interaction. Wobble trains ankle control and flexibility. It is present in two

difficulty levels. One that is stable and limited in its range of motion and one that is livelier and more dynamic. Rotation can be used for rotational flexibility of the torso and for lower limb balance and control standing on one or two feet. Half ball provides a fixed and stable platform to train ankle strength and flexibility.

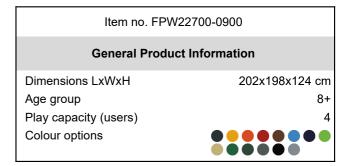



FPW227





Wackle step
Physical: sense of balance and space, and
training of posture. Important for being able to
sit still.



FPW227





The double ROSTA element is made of casted iron and hot-dip galvanised before being painted. This ensures that the ROSTA element is a maintenance-free, elastic joint which can move in 250 degrees in any direction. Both wobbles have different stiffness and differences of 45%.



The bearings used in the twist are slide bearings. These are made from extremely strong polyoxymethylene which is low wearing, highly mechanical, moisture absorbant and provides high abrasion resistance.



The half ball is ø500x250. The material is SBR granular rubber, recycled SBR (Styrene Butadiene Monomer, Synthetic Rubber) UV stabilised to a maximum without the use of heavy metal stabilities, for optimal grip during jumping and stepping exercises under all weather circumstances.

11011110.1111122100 0000			
Installation Information			
Max. fall height		25 cm	
Safety surfacing area	•	18.0 m²	
Total installation time		4.6	
Excavation volume	(0.58 m³	
Concrete volume	(0.28 m³	
Footing depth (standard)	90 cm		
Shipment weight		243 kg	
Anchoring options	In-ground		
	Surface	>	
Warranty Information			
Bearing Construction	5 years		
Galvanised Steel	Lifetime		
Post	10 years		
ROSTA Element	2 years		
Spare Parts Guarantee	10 years		

Item no. FPW22700-0900



The ø414mm top plate is made from 15mm Ekogrip®, a 15mm PE plate with a 3mm top-layer of thermoplastic rubber with non-skid effect. The height is 217mm and the range of motion is +/- 90°, with a EPDM rubber stop at each end.



Handrail intended as grips during exercises are made of hot-dip galvanised steel ø38mm, a great diameter for a good grip and to support the wrist. The height of the handrail is 940mm from the top of the HPL plate. The distance between the rails is 900mm.



Sustainability Data

FPW227





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
FPW22700-0900	332.19	2.04	62.14

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Fitness



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

made

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

