## Hurdles

FSW211





The five hurdles from an obstacle course can be used in many ways. You can walk, run or jump over the hurdles, or if you don't mind getting dirty you can 'belly crawl' underneath them. Alternately a single hurdle can be used for push ups and high jumps. The Hurdles are standard available in Orange, RAL2010 and Grey, RAL7012. All other RAL colours are

available on request. It will always be possible to match the surroundings or colour theme.

| Item no. FSW21100-0900      |               |  |  |  |  |
|-----------------------------|---------------|--|--|--|--|
| General Product Information |               |  |  |  |  |
| Dimensions LxWxH            | 164x651x57 cm |  |  |  |  |
| Age group                   | 13+           |  |  |  |  |
| Play capacity (users)       | 5             |  |  |  |  |
| Colour options              |               |  |  |  |  |





## **Hurdles**

FSW211



Lifetime

10 years

10 years



The post is made of Ø101.6 x 2mm, pregalvanised carbon steel and powder coated which is a great protection solution for all climate conditions.




The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



The bars intended for exercises are made of hot-dip galvanised steel ø48mm. The diameter of these bars provides good support when used to complete a push ups exercises or when doing exercises standing on the tubes.

| Installation Information |                          |             |   |  |  |  |
|--------------------------|--------------------------|-------------|---|--|--|--|
|                          | Max. fall height         | 40 cm       | n |  |  |  |
|                          | Safety surfacing area    | 41.0 m      | 2 |  |  |  |
|                          | Total installation time  | 4.4         | 1 |  |  |  |
|                          | Excavation volume        | 0.28 m      | 3 |  |  |  |
|                          | Concrete volume          | 0.00 m      | 3 |  |  |  |
|                          | Footing depth (standard) | 90 cm       | n |  |  |  |
|                          | Shipment weight          | 174 kg      | g |  |  |  |
|                          | Anchoring options        | In-ground ✓ | ı |  |  |  |
|                          |                          | Surface 🗸   | , |  |  |  |
| Warranty Information     |                          |             |   |  |  |  |
|                          | Connectors               | 10 years    | 3 |  |  |  |
|                          |                          |             |   |  |  |  |

Item no. FSW21100-0900

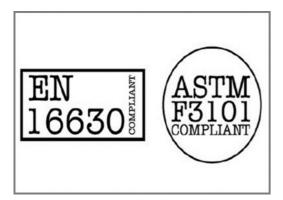

All of KOMPAN's fitness products are compliant with AS 4685:2021, ASTM F3101 & EN16630 Outdoor Fitness Standards. Load tests are performed to the specified load of 78kg per user. A product intended for one user is loaded with 420kg.



The information sign is made of a PA6 (Polyamide) and shows the most relevant exercises. When users scan the QR code, this will link them to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN Fitness App, which is programmed with many more exercise alternatives.



The height of each hurdle is 50cm and are places with 150cm distance apart which provides users with the opportunities to complete different exercises.



Galvanised Steel

Spare Parts Guarantee

Post

# **Sustainability Data**

FSW211





| Cradle to Gate A1-A3 | Total CO₂<br>emission | CO₂e/kg    | Recycled materials |
|----------------------|-----------------------|------------|--------------------|
|                      | kg CO₂e               | kg CO₂e/kg | %                  |
| FSW21100-0900        | 215.98                | 1.97       | 68.07              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Fitness



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  ${\rm CO_2}$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





FSW211



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

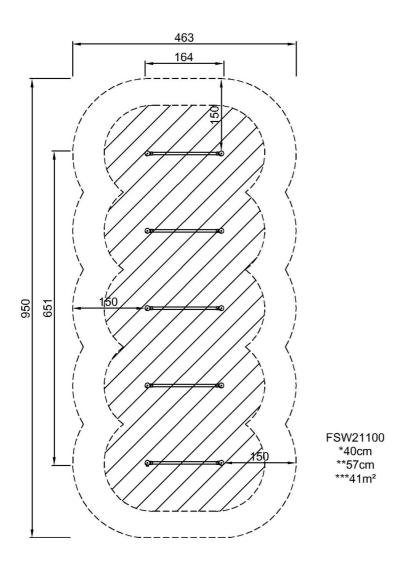



Click to see TOP VIEW

Click to see SIDE VIEW