
COR10420



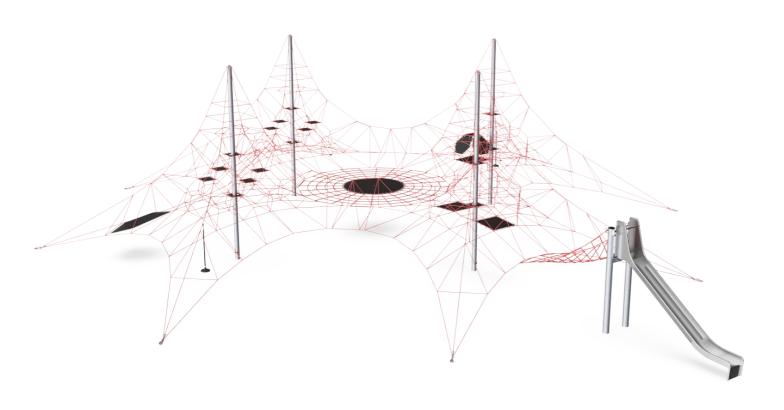

Item no. COR104201-1201


General Product Information

Dimensions LxWxH 2385x1902x580 cm

Age group 5+

Play capacity (users) 178


Colour options



The amazing Four-Mast Spacenet & Bouncing Net has so many play opportunities from the top to the bottom. The structure will provide hours of physical and social activity that all help towards building a healthy lifestyle. The carefully designed features support the development of agility, balance and coordination as well as spatial awareness

when bouncing, climbing and sitting in the nets. These motor skills are fundamental for life skills such as managing traffic securely. The careful design of the nets is scaled to the size of children in this age group, maximizing play value. The integrated jumping membranes offer extra fun variety. In addition to the physical benefits, this is an incredibly enjoyable social

space. It will attract children and their parents, creating a space for healthy family fun and be a point of pride for communities.



COR10420








### Mast

Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.

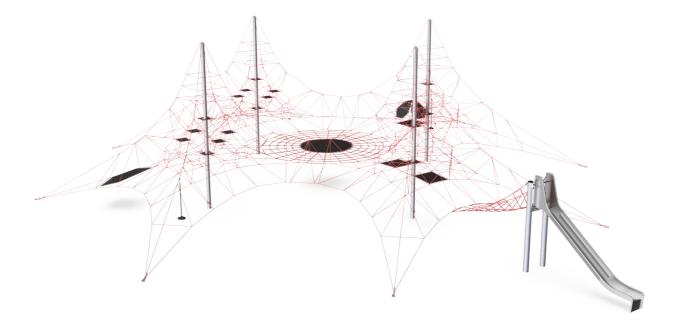







#### Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. Social-Emotional: great meeting point allowing socializing.









### Highest rungs

Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, selfconfidence, consideration and turn-taking, all important life skills.



**Bouncy net meshes** 



Physical: agility, balance and coordination as

well as spatial awareness are supported when

bouncing, climbing and sitting in the net.

and core, and build bone density when

jumping down. Social-Emotional: the

Children use muscle strength of arms, legs

bouncing, swaying net appeals to empathy and cooperation. Cognitive: physical memory, logical thinking, concentration.









#### Half sputnik as roof

Social-Emotional: sheltered bouncy meeting and resting point, stimulating social interaction and consideration of others.



by turn-taking.



Physical: sliding develops spatial awareness

and a sense of balance. Furthermore, the core

muscles are trained when sitting upright going

down. Social-Emotional: empathy stimulated







#### Membrane

Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. A faster way up, due to the extra support of the membrane. Social-Emotional: a meeting point for retreat from the rope landscape.

COR10420





Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The spacenets' main bearing ropes are equipped with an additional safety feature: should the main connections fail, the safety rope prevents collapse of the structure.

Item no. COR104201-1201

Installation Information				
Max. fall height	200	cm)		
Safety surfacing area	349.0	0 m²		
Total installation time		59.8		
Excavation volume	21.59	9 m³		
Concrete volume	13.70	0 m³		
Footing depth (standard)	110	cm)		
Shipment weight	2,61	5 kg		
Anchoring options	In-ground	~		

Warranty Information			
Corocord rope	10 years		
Membrane	2 years		
S-Clamps	10 years		
Spare parts guaranteed	10 years		
Steel post HDG	Lifetime		



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.



3 / 05/23/2024 Data is subject to change without prior notice.

**Sustainability Data** 

COR10420

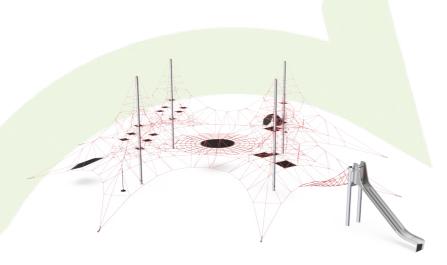

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR104201-1201	6,177.08	3.18	52.64

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))




#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

made

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





COR10420



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

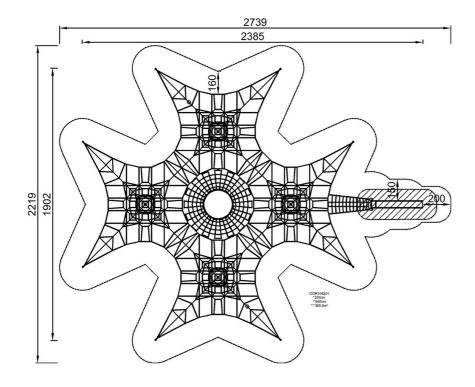



Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

Click to see TOP VIEW

Click to see SIDE VIEW