


# Tree Stump Trail

CRP200901




Item no. CRP200901-0901	
General Product Information	
Dimensions LxWxH	622x625x217 cm
Age group	2+
Play capacity (users)	20
Color options	<span style="color: red;">●</span> <span style="color: green;">●</span> <span style="color: blue;">●</span>

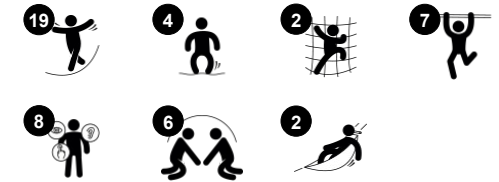

Loop, balance, bounce, sway and play your way around the Tree Stump Trail! Children are instantly attracted to play here again and again. The Ground is Lava, Tag and other classic games are supported by the varied activity loop. Each link of the play circuit adds new thrills: the swaying Hangout Pods are great destinations and challenging to balance, the

classic Balancing Rope with Handrail takes yet other balancing skills, and the Curved Pod Climber is yet another. The versatility of movements offers more than play challenge: Children train important motor skills such as agility, balance and coordination when playing their way through the varied links of the trim circuit. Important social skills come to full use in

cooperating and negotiating when passing other children in the circuit. The membrane seat at the entrance is a fine, bouncy point for a break with friends.

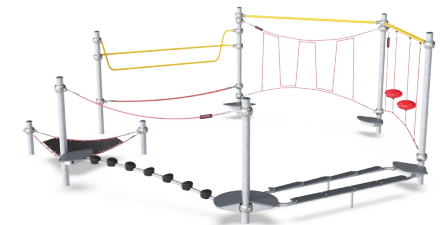

# Tree Stump Trail


CRP200901



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

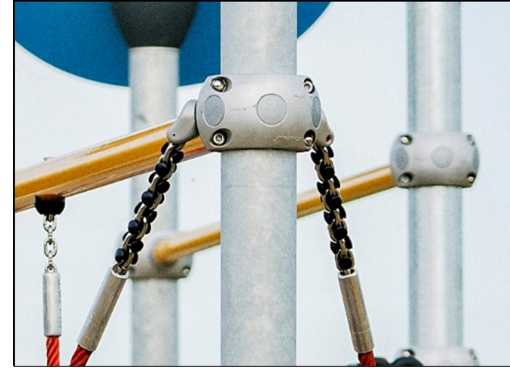

Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.


Item no. CRP200901-0901	
Installation Information	
Max. fall height	101 cm
Safety surfacing area	63.2 m <sup>2</sup>
Total installation time	16.3
Excavation volume	10.43 m <sup>3</sup>
Concrete volume	5.80 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	549 kg
Anchoring options	



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



The large components are made of 100% recyclable PE made from 33% post consumer materials. Molded in one piece with minimum 5mm wall thickness to ensure high durability in all climates around the world.

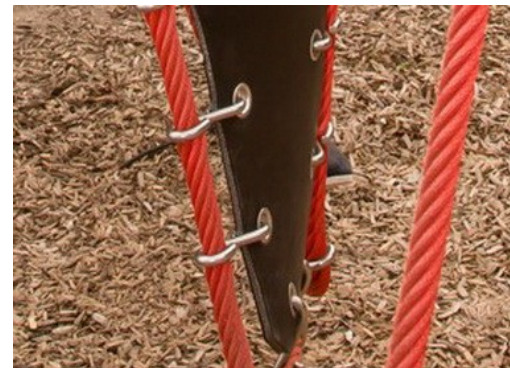

Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 8 mm.

**EN  
1176**  
compliant

# Sustainability Data

CRP200901



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>CRP200901-0901</b>	1,337.00	3.48	41.70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# Tree Stump Trail

CRP200901

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

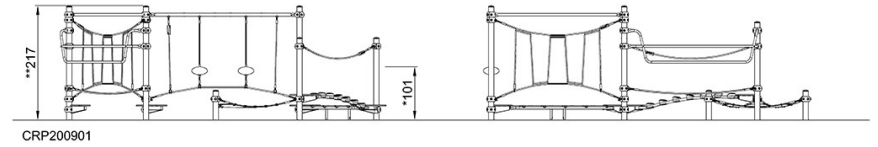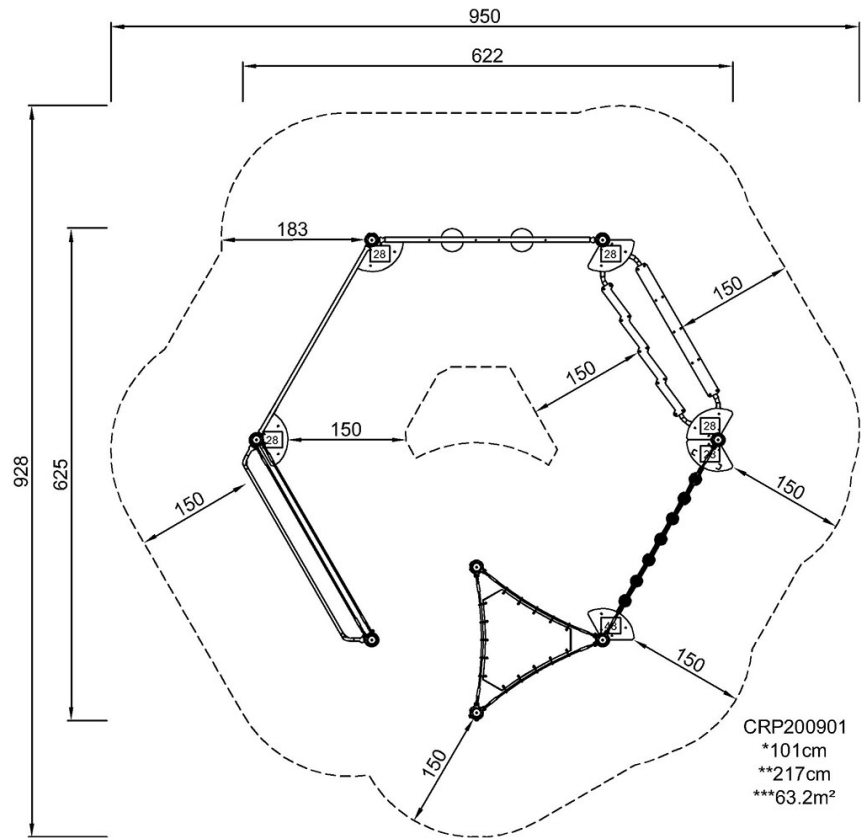

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)