
Play Panel 2 - Music, Classic

PCM003121







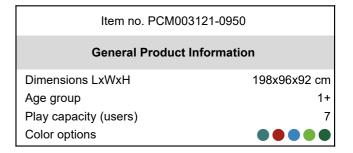







The Music Play Panel 2 attracts children immensely with its colorful combinations of rhythm, sounds and tones. They will come back again and again to be part of creative play, on their own or with friends and teachers. The music pipes offer sensory variations with a tonal sound outcome. Children train the handeye coordination which is crucial to control of

movement and e.g. handwriting. The black rubber flaps can be plunked, or pipes beaten and tunes created. This trains logical as well as creative thinking and invites cooperation and social play. The Percussion Panel is an immense play invitation for children: The drums can be played alone or together. There is room for many users to congregate around them.

This encourages social interaction and cocreation when drumming rhythms and singing along. It also stimulates cognition and creativity as children create rules and rhythms together or individually.





Play Panel 2 - Music, Classic

PCM003121





Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.

The Xylophone material in 19m made of die cast for outdoor env consist of 2 Cor in colored ABS.



The Xylophone music panel consist of HDPE material in 19mm EcoCore™. The pipes are made of die cast aluminum specifically alloyed for outdoor environments. The percussion panel consist of 2 Conga Drums with PP tubes and top in colored ABS.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor such as EcoCoreTM panels of +95% post consumer recycled ocean waste.


Item no. PCM003121-0950		
Installation Information		
Max. fall height	0 cm	
Safety surfacing area	14.7 m²	
Total installation time	4.6	
Excavation volume	0.05 m³	
Concrete volume	0.00 m³	
Footing depth (standard)	85 cm	
Shipment weight	94 kg	
Anchoring options		



Sustainability Data





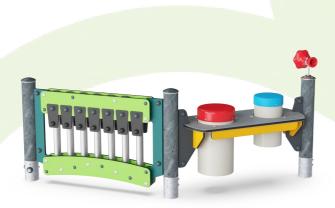

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM003121-0950	162.20	2.31	60.20
PCM003121-0901	174.10	2.75	50.70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


Play Panel 2 - Music, Classic


PCM003121



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

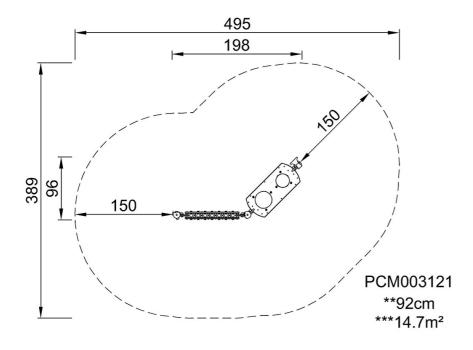

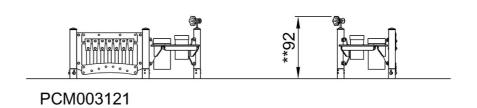

Click to see TOP VIEW

Click to see SIDE VIEW