City Bike Pro Touchscreen

FAZ50101




| Item no. FAZ5 | 50101-0801 | |
|-----------------------------|--------------|--|
| General Product Information | | |
| Dimensions LxWxH | 97x51x138 cm | |
| Age group | 13+ | |
| Play capacity (users) | 1 | |
| Colour options | | |

The City Bike provides a comfortable and challenging ride for all users. The frame is designed with a low open entry and ergonomics promoting an upright riding style. The saddle is wide to give the most support and is adjustable in 13 heights accommodating people from 150cm to 205cm tall. To motivate users to achieve their goals, this version of the

bike features a 7" LCD touchscreen giving instant feedback on speed, distance, cadence, watts, calories burned and time.An innovative self-powered electrical motor (patent pending) creates resistance similar to what you would experience on a real road bike. The resistance automatically adapts depending on pedalling speed, but users can also choose to manually

change the resistance on the touchscreen or through a Bluetooth-connected KOMPAN Cardio app.



City Bike Pro Touchscreen



10 years

10 years

FAZ50101







The saddle is made of a Polyurethane Rubber and has a steel insert plate which connects it to the aluminium saddle pin. The saddle can be adjusted to 13 different heights, using a stainless steel pop-pin.

The cover is made of one the hardest materials in the market, a Lexan Copolymer EXL9330 and has a thickness of 4mm. This cover can withstand any impact and will protect the electronics in the best possible way.

The Q-factor of the arm bike is 175mm, the crank is made of 18 mm stainless steel and connects the pedal arms which are casted stainless steel (grade 304) parts. The length of the pedal arms is 170mm and the pedals are connected with standard bike fittings.

| Installation Information | | |
|--------------------------|-----------|-------|
| Max. fall height | 10 |)0 cm |
| Safety surfacing area | 11 | .1 m² |
| Total installation time | | 2.3 |
| Excavation volume | 0.3 | 34 m³ |
| Concrete volume | 0.2 | 21 m³ |
| Footing depth (standard) | 8 | 30 cm |
| Shipment weight | 1 | 27 kg |
| Anchoring options | In-ground | ~ |
| | Surface | ~ |
| Warranty Information | | |
| Electronics | 2 | years |
| Frame | 10 | years |
| Handle | 10 | years |

Item no. FAZ50101-0801

Saddle

Spare parts guaranteed

The Innovative self-powered electrical motor and gear providing a virtual flywheel to give real road experience. The resistance works as and automatic drive and adapts automatically to the pedaling speed. The users can overwrite the automatic drive manually by changing the resistance in steps (26 - Watts) through the App.



The handle bars is designed with multiple hand positions to accommodate different postures and riding styles. It is a casted Aluminium part with Polyurea coating for good grip and insulation.





You can connect the cardio machine to your phone or tablet via Bluetooth. This will provide instant feedback on speed, distance, cadence, watts, calories burned and time. You can also use your smart devices to manually adjust resistance (10 levels), have access to instructional and motivational videos, store and share activity data online!



Sustainability Data

Cradle to Gate A1-A3


FAZ50101-0801

FAZ50101



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

337.61

CO2e/kg

kg CO₂e/kg

4.48

Recycled

materials

%

34.59





FAZ50101

* Max fall height | ** Total height | *** Safety surfacing area



* Max fall height | ** Total height

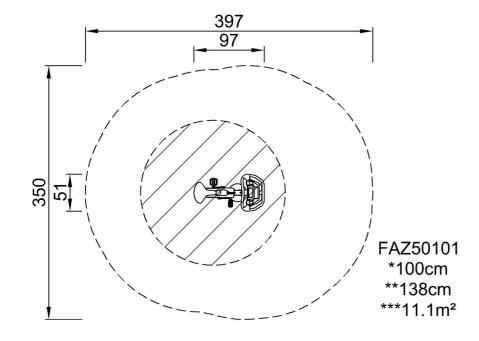

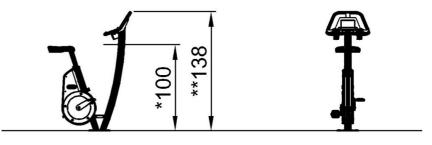

FAZ50101

Click to see TOP VIEW

Click to see SIDE VIEW

4 / 09/05/2024