KSW90063





General Product Information

Dimensions LxWxH 655x240x274 cm
Age group 2+
Play capacity (users) 8
Colour options



The combination of the bird's nest swing and two single seats swing is a hit: children love it, as it can be done individually or together with friends. It facilitates laying, seated, standing swinging, alone or together. It is a great facilitator of fun rough-and-tumble play. The seats cater for multiple users of all abilities and most ages. Swinging, apart from being

tremendous fun, trains the children's ABC: agility, balance and coordination, as well as their spatial awareness. These motor skills are crucial to being able to judge distance and navigate traffic safely. The standing sitting, laying and standing swing activities train the arm, leg and core muscles. The jumping off builds bone density; the majority of which is

built up during the first years of life. Finally, this swing supports social skills such as turn-taking and cooperation.





KSW90063







Two single swing seats

Physical: balance, coordination and spatial awareness are trained when swinging. All necessary when judging distances and managing traffic safely. Social-Emotional: parallel play invites cooperation and consideration. Cognitive: 'Cause and effect' understanding, managing rhythm and thinking skills for younger children when swinging. Rules games for bigger children.









Shell nest swing

Physical: balance, coordination and spatial awareness are developed when swinging. The swinging movement trains the arm, leg and core muscles. Social-Emotional: the spacious seat allows for many children standing, lying, seated together and is inclusive for all. Cognitive: 'Cause and effect' understanding, rhythm and thinking skills are developed in younger children.

KSW90063





The A-Frame is designed with hot-dip galvanised ø100mm crossbar with large steel end plates for durability, and posts are available in the two different options: Hot-dip galvanised ø70mm steel or Impregnated pine wood with hot-dip galvanised steel footings.



The swing hangers are made of high-quality UVstabilised nylon (PA6) housing with integrated lifetime sealed ball bearings. The adjustable chains are fixed by a stainless steel hook with a theft-proof snake-eye bolt which is manufactured within an anti-twist house. All seats are fixed with two chains and are available with either standard or anti-wrap suspension.



The post of the A-Frame swings is available in two mounting options; surface mounted with anchoring expansion bolts or inground in 60cm or 90cm depth. The hot-dip galvanised steel legs are anchored directly into the ground and Pinewood posts are elevated from the ground by a unique profiled hot-dip galvanised steel footing.



Installation Information Max. fall height 145 cm Safety surfacing area 40.7 m² Total installation time 6.5 Excavation volume 1.95 m³ Concrete volume 0.00 m^3 Footing depth (standard) 90 cm Shipment weight 249 kg Surface Anchoring options In-ground **Warranty Information** Chains 10 years Galvanised Steel Lifetime Spare Parts Guarantee 10 years Swing Hangers 5 years Swing Seat 10 years

Item no. KSW90063-0909



The standard seats of KOMPAN swings are engineered for maximum safety and durability. The seat two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot-dip galvanised steel or stainless steel for all swings heights.



KOMPAN heavy duty designed swing hangers of stainless steel with anti-twist function. The moving parts of the swing hanger is lifetime sealed and lubricated. The hanger system is equipped with a safety chain to prevent the swing hanger to fall down if damaged.



KOMPAN's bird's nest seats have been designed to be light in weight and compliant with global safety standards. The soft, shockabsorbent bumpers has a non-slip surface, making the swing seat extremely user friendly. You can choose between a rope version with reinforced PA rope or a moulded PE version.



3 / 10/03/2024 Data is subject to change without prior notice.

Sustainability Data

KSW90063





Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
KSW90063-0909	694.46	2.87	46.74

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





KSW90063



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

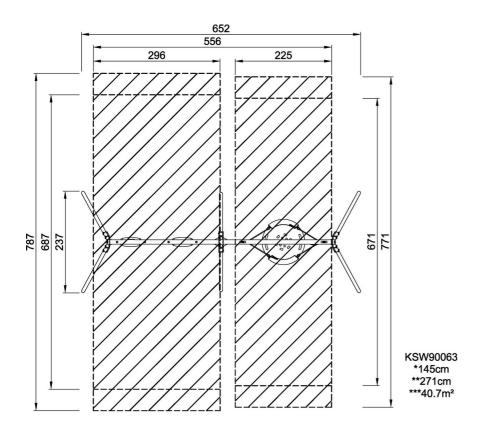

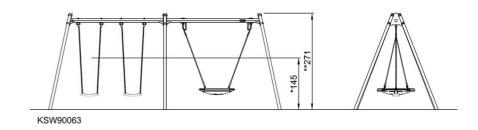

Click to see TOP VIEW Click to see SIDE VIEW