

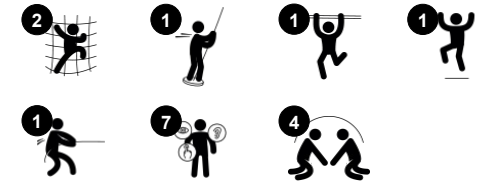


Track Ride Tower

NRO1022



Item no. NRO1022-1021	
General Product Information	
Dimensions LxWxH	22'5"x9'7"x8'10"
Age group	5 - 12
Play capacity (users)	5
Color options	

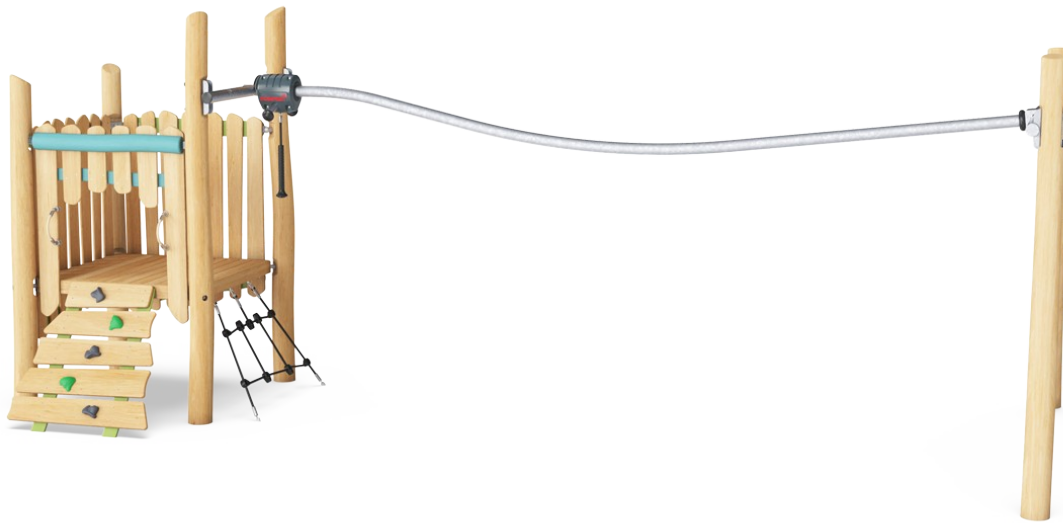

The Track Ride Tower is a great play event that responds to a child's quest for thrill and adventure. This is a recipe for play success and children will return for play again and again. The track ride glides down from the tower. Trained users will be able to flip their legs up at the end and push themselves all the way back to the platform. This trains muscles,


proprioception and timing, all important abilities in sports and life to navigate surroundings securely. Jumping off at the end or halfway back will build bone density. The hand hold allows users to hand over the glider. Children train their arm, leg and core muscles when gliding. They also train social-emotional skills when turn-taking and showing empathy,

helping others to succeed. This is thrilling, fun play that trains the child's social and physical life skills.



Track Ride Tower

NRO1022

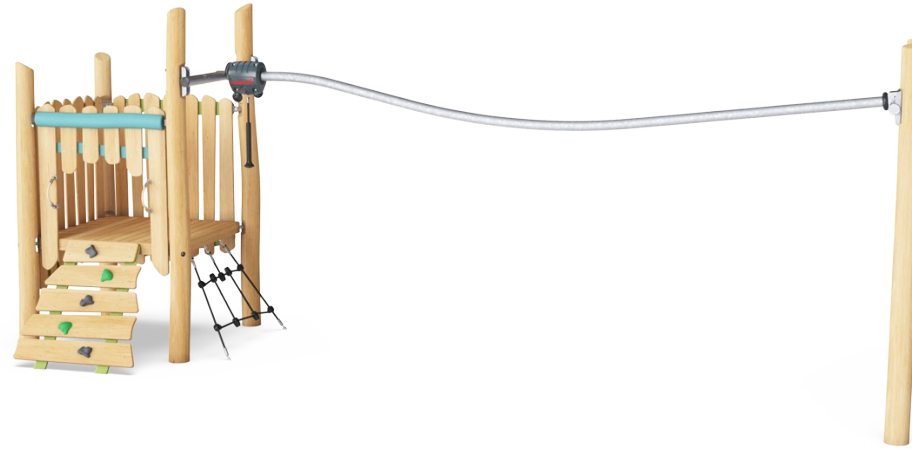

Track Ride

Physical: trains arm and core muscles. Supports improved bone density when jumping from the handholds and motor skills like agility, balance and coordination. **Social-Emotional:** cooperation, consideration, turn-taking, risk-taking, self-confidence.



Rock climber

Physical: supports cross coordination and leg, arm and hand strength. The handholds on top ease entry into platform. **Social-Emotional:** the incline makes climbing feel safer, especially for younger children.

Track Ride Tower

NRO1022



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



The paint used for coloured components is water based environmentally friendly with excellent UV resistance. The paint is in compliance with EN 71 Part 3.




Swing hangers for Robinia wood crossbeams are made of stainless steel brackets and can move over two axis. The flange bearings are silicone enriched to make the suspension maintenance free.

Item no. NRO1022-1021	
Installation Information	
Max. fall height	6'4"
Safety surfacing area	568ft ²
Total installation time	14.6
Excavation volume	2.04yd ³
Concrete volume	0.2yd ³
Footing depth (standard)	3'3"
Shipment weight	1580lbs
Anchoring options	In-ground ✓
Warranty Information	
Robinia Wood	10 Years
Ropes & nets	10 Years
Spare Parts Availability	10 Years
Stainless steel components	Lifetime
Stainless steel components	Lifetime



Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to ensure excellent wear and tear resistance.

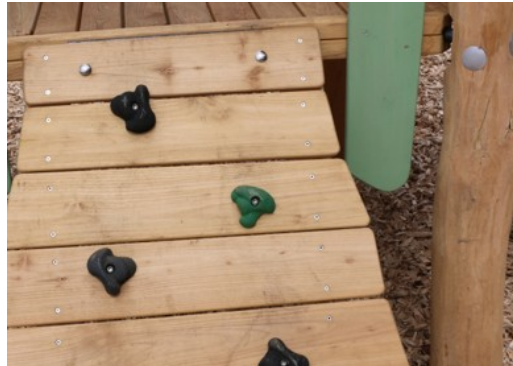

The hardware is made of stainless steel or galvanized steel to ensure durable connections with a high corrosion resistance.




The Robinia products are designed with a KOMPAN color concept with a number of different standard colors. The wood can also be supplied as untreated or with brown painted with a pigment that maintains the wood color.

Elevated activities 3	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	0	0
Required	2	1	1

ASTM F1487
compliant

Sustainability Data

NRO1022

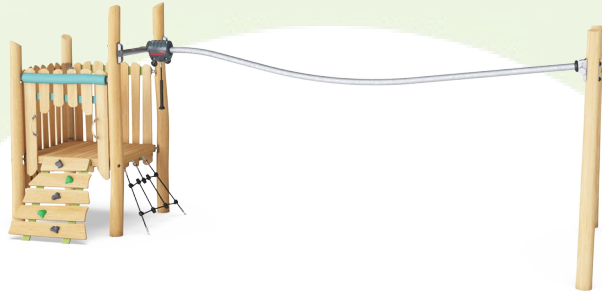

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
NRO1022-1021	333.48	0.57	8.34

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Track Ride Tower

NRO1022

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

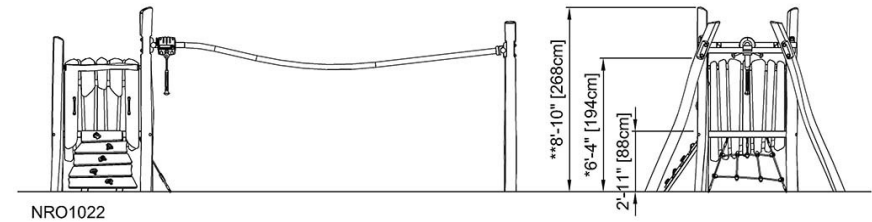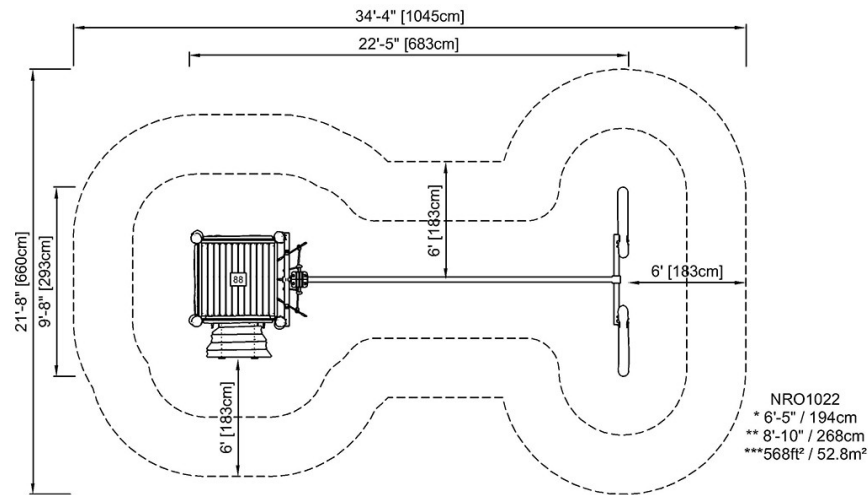

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)