Fairytale Dog

M173



Item no. M17301-01P		
General Product Information		
Dimensions LxWxH	36x94x80 cm	
Age group	2+	
Play capacity (users)	1	
Color options	•	



The Fairytale Dog is a hugely inviting springer which attracts and supports children's relentless play again and again. The rocking sensation is a great movement response. Movement response is one of the greatest play sensations there are. Apart from the fun, this adds a feeling of control to the child's play. The responsive movement also trains the understanding of cause and effect in young children: that their actions have an effect on the world. Rocking the Fairytale Dog trains the child's sense of balance and space as well as hand and arm muscles when holding tight and pushing your feet hard into the foot support. All of these basic motor and muscle skills help train the child's bodily cognition, supporting important life skills such as being able to sit still on a chair or navigate traffic securely.



Fairytale Dog



M173







Item no. M17301-01P		
Installation Information		
Max. fall height	(60 cm
Safety surfacing area	7	7.5 m²
Total installation time		2.6
Excavation volume	0.	19 m³
Concrete volume	0.	00 m³
Footing depth (standard)	45 cm	
Shipment weight		31 kg
Anchoring options	In-ground	~
	Surface	~

...

Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



Handholds and footrests are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.



Seat is made of a moulded PP insert with an outer soft layer of TPE rubber. TPE rubber has good shock absorption and ensures durable solution.



Sustainability Data

Cradle to Gate A1-A3

M17301-01P

M173



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk

By Bureau Veritas HSE +45 7731 1000

BUREAU VERITAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

70.90

CO2e/kg

kg CO₂e/kg

2.53

Recycled

materials

%

48.20





M173



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

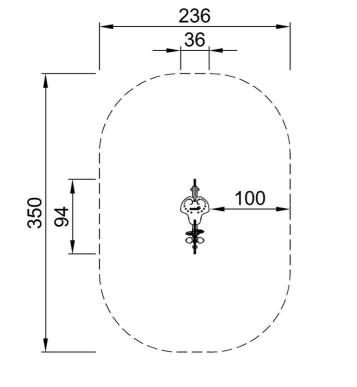

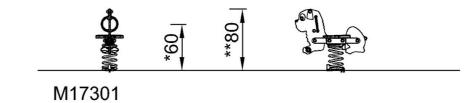

M17301 *60cm **80cm ***7.54m²

Click to see SIDE VIEW

Click to see TOP VIEW