Combi 1


FPW101





General Product Information

Dimensions LxWxH 315x230x240 cm
Age group 8+
Play capacity (users) 3
Colour options



favourite, because it is the perfect training station for using additional exercise tools, such as suspension trainers and small weights. The Pull Up Bar is made from solid steel and has a diameter of ø32 mm. An ideal size for both men, women and kids to have a good grip. As the bar hangs at a height of 233cm, everyone will be able to hang freely and use the bar for a

variety of Pull Ups.



Combi 1

FPW101




10 years



Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



All bars intended for pull ups are made of solid, ø32mm x 138 m, hot dip galvanised, S235JR steel bars. This diameter gives the right grip for everyone.

Item no. FPW10100-0900		
Installation Information		
Max. fall height	2	233 cm
Safety surfacing area	3	0.4 m²
Total installation time		4.2
Excavation volume	0	.75 m³
Concrete volume	0.38 m³	
Footing depth (standard)	90 cm	
Shipment weight	140 kg	
Anchoring options	In-ground	✓
	Surface	~
Warranty Information		
Connectors	10 years	
Hot dip galvanised steel	Lifetime	
Post	10 years	



The surface is made of Ekogrip[™] panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip[™] panels have a non-skid effect for comfortable and safe training at all weather circumstances.



Spare parts guaranteed

Sustainability Data

FPW101





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Fitness



Data version no. 2023-10-05

The $\mathrm{CO_2}$ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).


Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



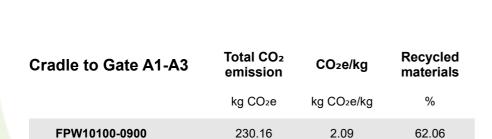


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


FPW101



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

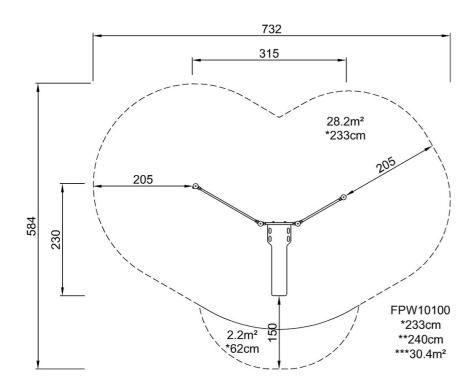

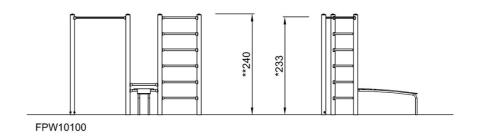

Click to see TOP VIEW

Click to see SIDE VIEW