PCM53021



Item no. PCM53021-0901		
General Product Information		
Dimensions LxWxH	394x429x451 cm	
Age group	6+	
Play capacity (users)	8	
Colour options	•	





This beautiful climbing tree intrigues children and invites them to play again and again. Climbing is one of the favourite activities of children. In the Lookout Tree, the dense, yet varied, climbing options take children up, down and around the tree. From the top platform, children can enjoy the view of the playground and go back to the ground via the banister bars. Apart from being great fun, climbing trains the cross-coordination and major muscle groups of children. Building up crosscoordination skills stimulates the brain's crossmodal perception, a fundament for e.g. reading skills. Cross-coordination skills additionally assist the child in navigation the surroundings securely.

PCM53021





Climbing wall Physical: develops children's cross coordination, eye-hand coordination, and muscle strength when climbing. Social-Emotional: two-sided climb invites cooperation.





Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.



Pipe ladder

Physical: cross coordination and eye-hand coordination are supported when children climb the ladder. The climbing also supports leg and arm muscles. **Social-Emotional:** learning about turn taking and cooperation.



Fireman's pole

Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in early childhood. **Social-Emotional:** turn-taking and risk-taking.



Banister bars

Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in childhood. **Social-Emotional:** turn-taking and risk-taking.



Hammock

Physical: coordination and sense of balance when swaying. **Social-Emotional:** meeting, pushing friends gently back and forth, turntaking.







Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Main posts with hot dip galvanized steel footing are available in different materials: Pregalvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. TexMade posts of 95% post-consumer recycled PE and textile waste.




All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.

Item no. PCM53021-0901			
Installation Information			
Max. fall height	239	9 cm	
Safety surfacing area	29.7 m²		
Total installation time	19.4 hours		
Excavation volume	0.49 m³		
Concrete volume	0.14 m³		
Footing depth (standard)	90 cm		
Shipment weight	700 kg		
Anchoring options	Surface 🗸		
	In-ground	~	
Warranty Information			
EcoCore HDPE	Lifetime		
Post	10 years		
PP Decks	10 years		
Spare parts guaranteed	10 years		
Stainless steel slide	10 years		



The slides can be chosen in six different colours and three materials: Straight or curved onepiece molded PE slides; Combined EcoCore™ and stainless-steel slides; Full stainless steel in one-piece design for a more vandalism proof solution.



The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCoreTM panels of 95% post-consumer recycled waste and molded PP decks.



Sustainability Data

Cradle to Gate A1-A3


PCM53021-0901

PCM53021



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

1,033.38

CO2e/kg

kg CO₂e/kg

1.89

Recycled

materials

%


77.29


PCM53021



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

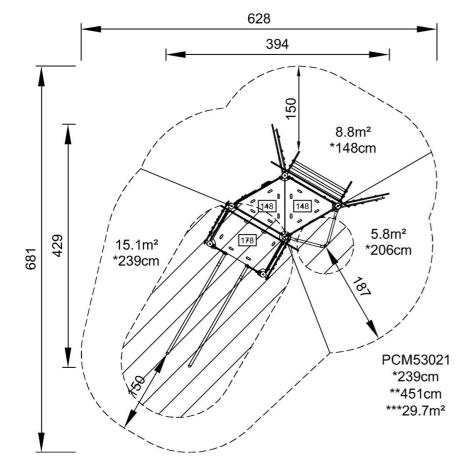

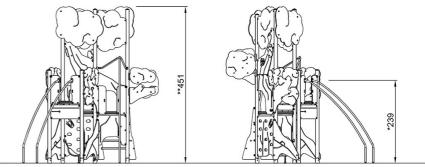

PCM53021

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 06/28/2025