FPW215



Item no. FPW21500-0900		
General Product Information		
Dimensions LxWxH	535x317x45 cm	
Age group	8+	
Play capacity (users)	3	
Colour options		

In addition to running, jumping, climbing, crawling, balancing should always be a part of a challenging obstacle course. The balance beam is divided into three sections with increasing degrees of difficulty. The real dare devils can make the exercises even more difficult by balancing backwards. The surface of the Balance Beam is made from Ekogrip® panels with a top-layer of thermoplastic rubber, this has a non-skid effect for comfortable and safe training at all weather circumstances.



1 / 08/01/2024

FPW215





Balance beam

Physical: trains the sense of balance, fundamental for all other motor skills that makes it possible to navigate the world confidently and securely. Social-Emotional: turn-taking skills and negotiation when crossing each other on the beam. Room for a seated rest and exchange.



FPW215







The post is made of Ø101.6 x 2mm, pregalvanised carbon steel and powder coated which is a great protection solution for all climate conditions. The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers. Bars intended as grips during exercises are made of hot-dip galvanised steel ø38mm. A great diameter to support the wrist when doing dips or handstands.

Item no. FPW21500-0900			
Installation Information			
Max. fall height	4	0 cm	
Safety surfacing area	27.8 m²		
Total installation time	3.7		
Excavation volume	0.11 m³		
Concrete volume	0.00 m³		
Footing depth (standard)	90 cm		
Shipment weight	113 kg		
Anchoring options	In-ground	~	
	Surface	~	
Warranty Information			
Connectors	10 years		
EcoCore HDPE	Lifetime		
Galvanised Steel	Lifetime		
Post	10 years		
Spare Parts Guarantee	10 years		



# **Sustainability Data**

Cradle to Gate A1-A3

FPW21500-0900

**FPW215** 



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







#### Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

#### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

215.70

CO2e/kg

kg CO<sub>2</sub>e/kg

3.17

Recycled

materials


%


42.41

FPW215

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

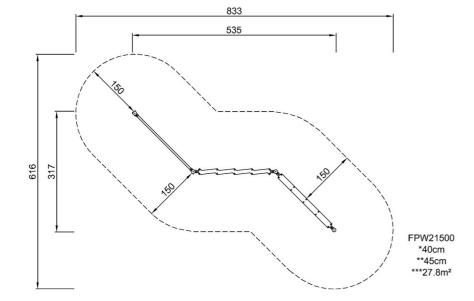



Click to see TOP VIEW



