

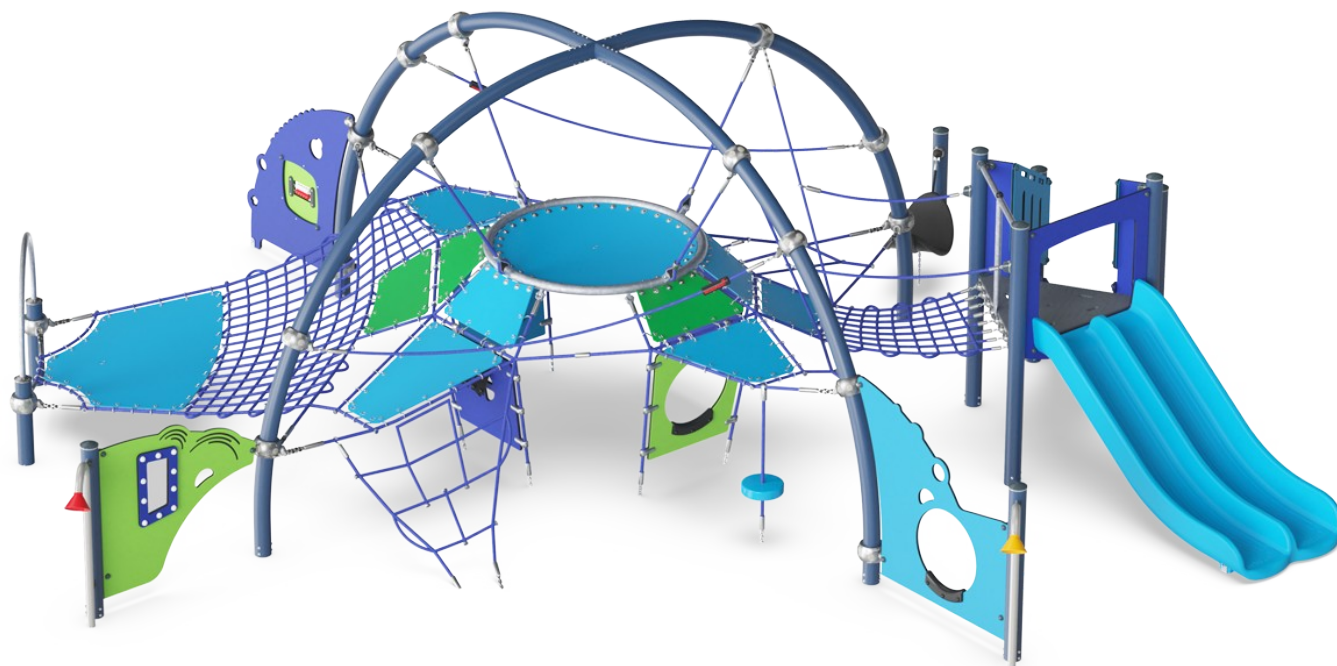


Mini Dome with Slide

CRP810201

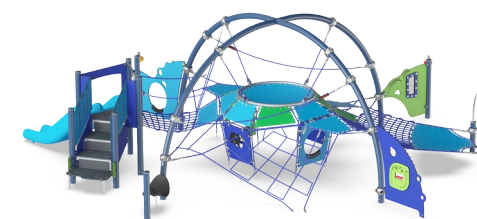

Item no. CRP810201-0903	
General Product Information	
Dimensions LxWxH	750x740x255 cm
Age group	2+
Play capacity (users)	42
Color options	

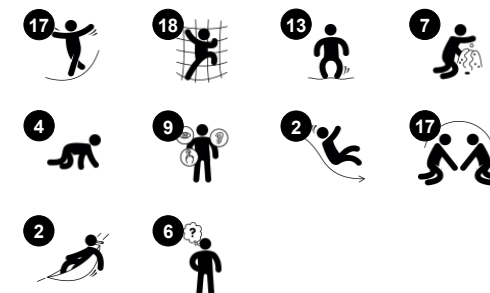

Marvelous Mini Dome amazes children with its richness in play variation and detail, again and again. The Dome can be entered from all over: bouncy membranes, nets, climbing ropes, and stairs take the toddlers to the top membrane circle. This bouncing viewpoint invites friends to meet. Under it, a cozy den is created with varied climb or peep-through membranes that

invite play classics such as peek-a-boo. The panels and hammock around the central nets allow for dramatic play and exploration with sensory details. The slide is a play magnet and completes the play offerings that train motor skills such as balance, coordination and proprioception. These are fundamental in moving the body confidently and securely. The

varied movements additionally instill an understanding of space, shapes, and measures which is fundamental for understanding mathematics. The Mini Dome offers great play capacity, so children learn turn-taking skills through play and make friends that way.



Data is subject to change without prior notice.

Mini Dome with Slide

CRP810201



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The bended arches are holding the tensioned net structure without additional disturbing fasteners. The arches are produced from high quality stainless steel to allow movement of the net on the surface of the steel arches. The surface is treated to make it shiny.



The slides can be chosen in six different colors and two materials: Molded PE slides made with 33% post consumer materials or full stainless steel in one-piece design for more vandalism proof solutions.

Item no. CRP810201-0903

Installation Information

Max. fall height	127 cm
Safety surfacing area	73.1 m ²
Total installation time	36.6
Excavation volume	16.28 m ³
Concrete volume	11.43 m ³
Footing depth (standard)	90 cm
Shipment weight	1,103 kg
Anchoring options	



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

**EN
1176**
compliant

Sustainability Data

CRP810201



Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
CRP810201-0903	2,319.00	3.10	47.50

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Mini Dome with Slide

CRP810201

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

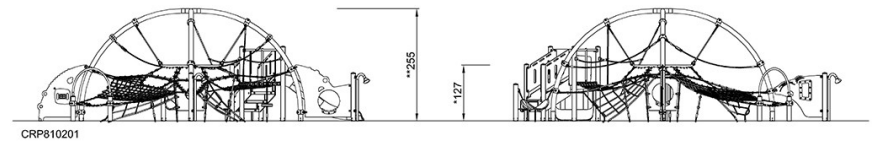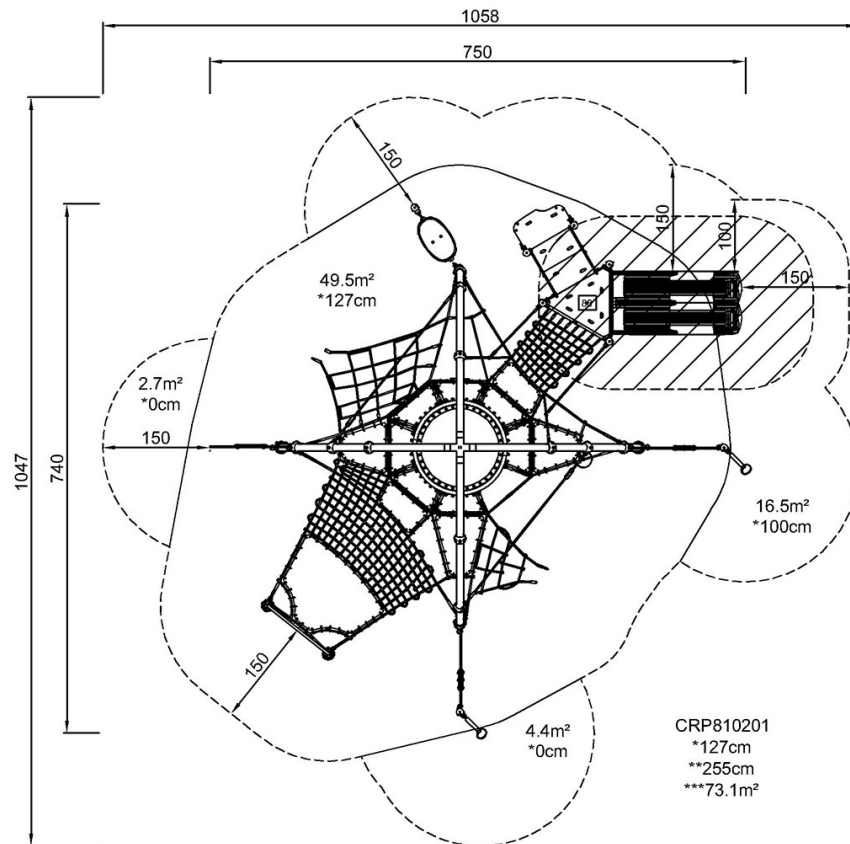

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)