


# Giant Bamboo Trail

CRP252401




Item no. CRP252401-0902	
General Product Information	
Dimensions LxWxH	1857x1384x469 cm
Age group	6+
Play capacity (users)	68
Color options	

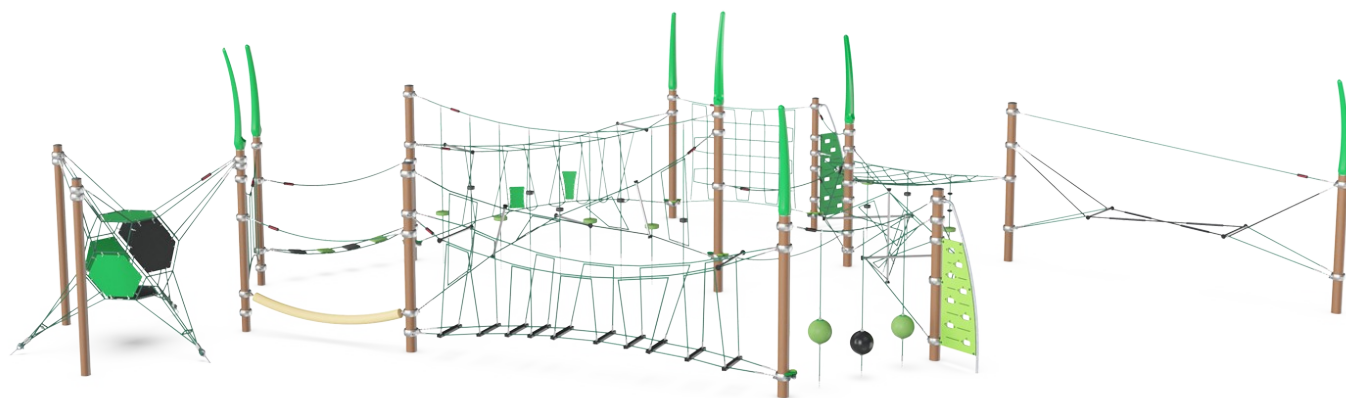

The Giant Bamboo Trail provides thrilling, responsive challenges for children. The variety of play activities make them want to come back again and again for more fun. The nets act as a big trim trail and encourage games such as "the ground is made of lava". Lots of responsive, swaying and bouncing nets demand concentrated movement, adjusting for

different rhythms of climbing. The nets train agility, balance and coordination skills. Apart from being great fun, the Orbital Hangout Steps, the Sputnik, the Horizontal Net and the Coconut Rope allow children to take a break and socialise or cooperate together to move around the structure. This develops important social-emotional skills such as turn-taking,

helping and sharing. All in all, a fun trail that will attract children again and again!

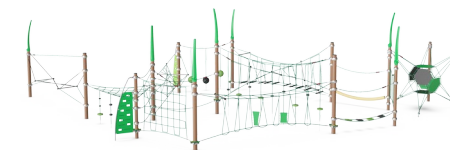

Data is subject to change without prior notice.

# Giant Bamboo Trail


CRP252401



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

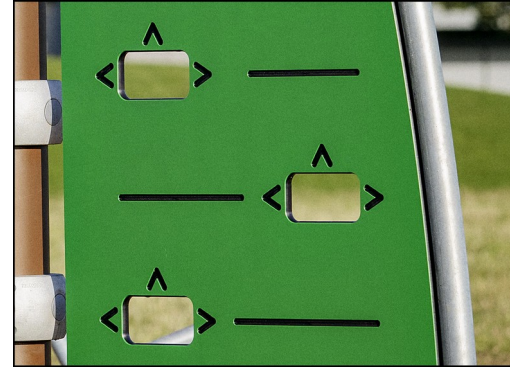

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

Item no. CRP252401-0902

## Installation Information

Max. fall height	270 cm
Safety surfacing area	227.4 m <sup>2</sup>
Total installation time	58.8
Excavation volume	34.94 m <sup>3</sup>
Concrete volume	19.86 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	2,893 kg
Anchoring options	Surface ✓ In-ground ✓



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.




The PP rope in coconut style has a diameter of 150 mm. The internal steel wire core has thimbles at both ends, which serve as attachments for the rope to existing connecting elements.



# Sustainability Data

CRP252401

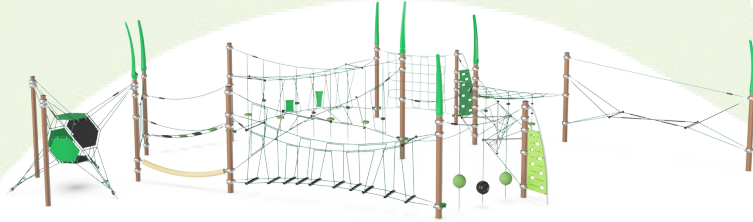

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>CRP252401-0902</b>	6,981.90	3.57	42.70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# Giant Bamboo Trail

CRP252401

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

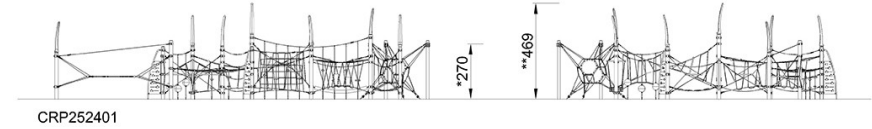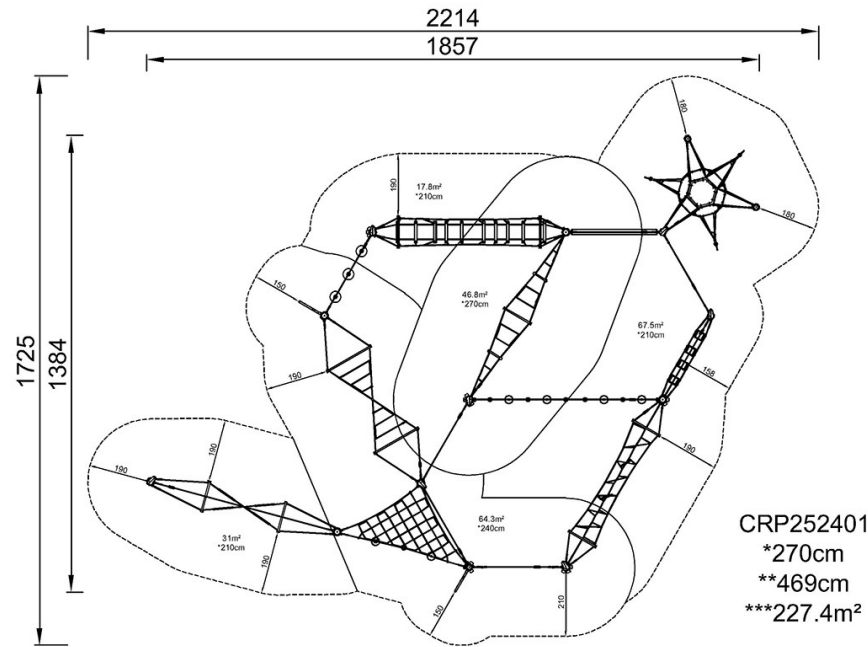

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)