CRP251001





General Product Information


Dimensions LxWxH 26'3"x22'4"x12'1"

Age group 5 - 12

Item no. CRP251001-0902

Play capacity (users)

Color options



WOW! The Kipunji's varied range of climb, crawl and bounce thrills makes it highly attractive for children, again and again. The high variety of activities appeal to a wide age range, challenging cross-coordination skills, which again trains body confidence and spatial awareness. The triangular membrane and horizontal nets serve as spacious meeting

points, inviting children to rest and socialize amidst the physical thrills. Kipunji also invites acrobat exercises on the high bars and rocking and swaying upper body driven movements on the Overhead Rocker with UFO discs. This invites cooperation and upper body activity, which is especially important in today's sedentary lifestyles. Kipunji is a highly versatile

play piece that invites both physical and social activity.



CRP251001









Curved slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking.









Overhead rocker

Physical: arm, leg and core muscles climbing up and through. Proprioception and spatial awareness are supported when climbing through, both motor skills that help in judging the body in space. Social-Emotional: cooperation when rocking from both sides. Swaying seat for a break, inviting socializing and turn-taking.







Physical: climbing here develops cross coordination, which supports cross-modal perception, necessary for other skills such as reading.



Quadrangle amusement net

Physical: the inclined net supports the upward climbing movement of the body. Children develop cross-body coordination and muscle strength. Social-Emotional: the big net allows for more children to sit or lay together, sharing.



Triangular net

Social-Emotional: the net allows for more children to sit or lay together, sharing.







Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. Social-Emotional: great point for a break or meeting with friends.

CRP251001



10 Years


10 Years



Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to ensure excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.

Item no. CRP251001-0902					
Installation Information					
Max. fall height		7'0"			
Safety surfacing area	-	797ft²			
Total installation time		27.9			
Excavation volume	20.	56yd³			
Concrete volume	6.7	74yd³			
Footing depth (standard)		2'11"			
Shipment weight	17	08lbs			
Anchoring options	Surface ✓				
	In-ground	~			
Warranty Information					
Aluminum clamps	10`	Years			
Hot dip galvanized steel	Lifetime				
Painted toplayer	10 Years				



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



The Corocord Smart Clamps are carefully designed to ensure superior flexibility in high-quality aluminum material. The smart clamps are attached around the post with four steel bolts. Unused attachment points are closed with PA caps.



Slide is made of molded PE. PE has excellent impact strength and it is usable within a large temperature span.

Elevated activities 2	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	2	2	2
Required	1	1	1

ASTM F1487 compliant

Ropes & nets

Spare Parts Availability

Sustainability Data

CRP251001





Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	CO₂e/kg Recycled materials	
	kg CO₂e	kg CO₂e/kg	%	
CRP251001-0902	2,153.73	3.34	45.79	

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000


CRP251001

KOMPAN Let's play

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

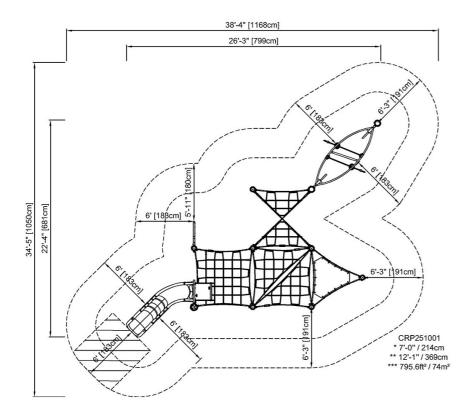

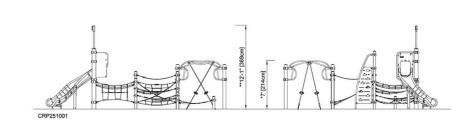

Click to see SIDE VIEW

Click to see TOP VIEW