



Pathfinder Trail

CRP200301

Item no. CRP200301-0901

General Product Information

Dimensions LxWxH	603x525x217 cm
Age group	2+
Play capacity (users)	10
Color options	

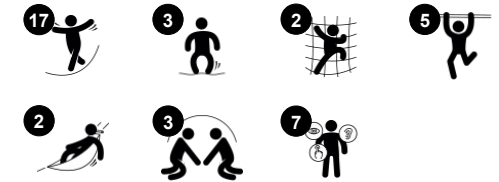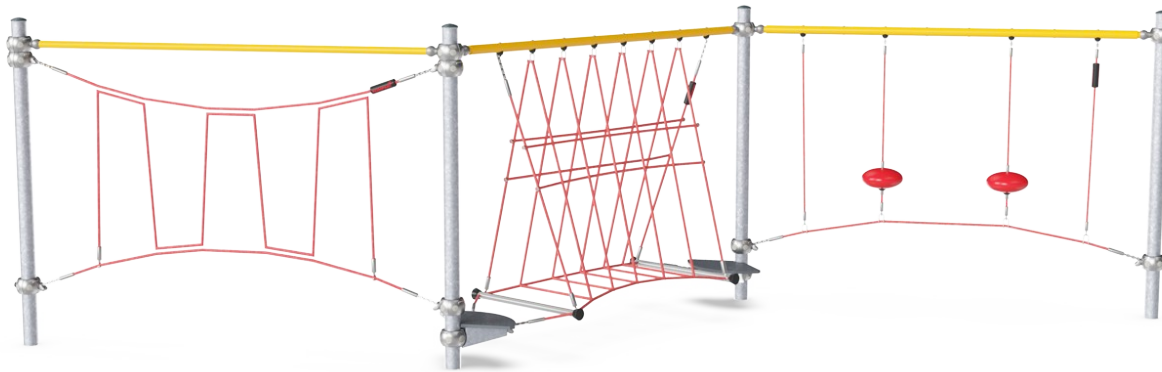

The Pathfinder Trail wows playful minds with its fun, swaying trail. Children will return again and again to traverse the trail faster, smoother or with more friends. The swaying Hangout Pods are great to balance over or sit on. The Pathfinder Trail's slalom-style, bouncy crossed ropes make for a thrilling crossing. The bouncy Climbing Rope offers a criss-cross pattern trail

inviting groups of friends to sit and sway. The activities all support the build-up of agility, balance and coordination skills, and spatial awareness, too. These motor skills are fundamental for the child's body confidence, and its ability to navigate the surroundings confidently. They are the basis for understanding space, shapes and measures

which are necessary in mathematics. As children traverse the Pathfinder Trail, they need to cooperate and negotiate with friends to pass them. This is great training of social skills, the most important skill for happiness.

Pathfinder Trail


CRP200301



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

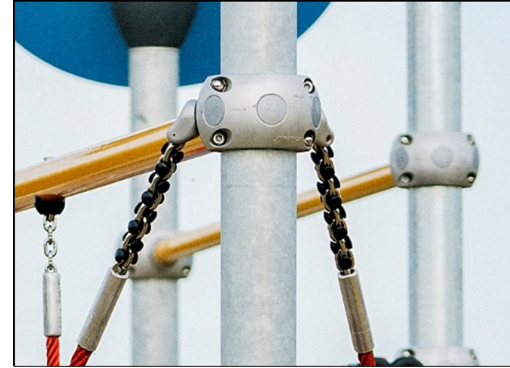

Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



The large components are made of 100% recyclable PE made from 33% post consumer materials. Molded in one piece with minimum 5mm wall thickness to ensure high durability in all climates around the world.



Grey round post decks are supported by hot dipped galvanized steel and made of molded 75% post-consumer PP material with a non-skid pattern and texture surface.

Item no. CRP200301-0901


Installation Information

Max. fall height	101 cm
Safety surfacing area	39.7 m ²
Total installation time	9.4
Excavation volume	5.18 m ³
Concrete volume	2.90 m ³
Footing depth (standard)	90 cm
Shipment weight	328 kg
Anchoring options	

**EN
1176**
compliant

Sustainability Data


CRP200301

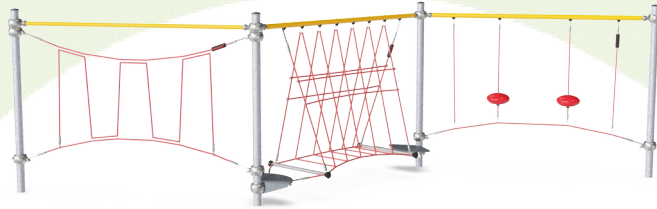

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
CRP200301-0901	827.50	3.73	43.90

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark

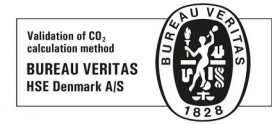

Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Pathfinder Trail

CRP200301

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

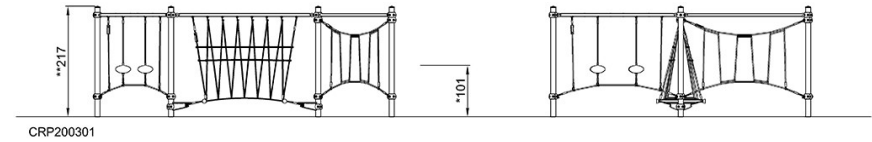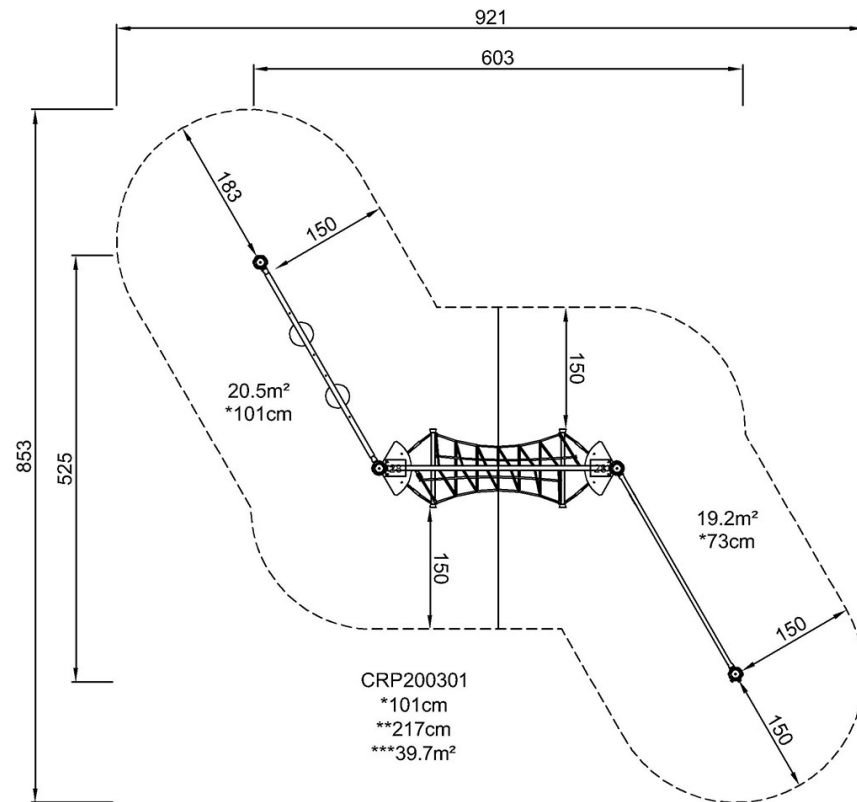

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)