MSC6424





With its great shop & service station and a fully equipped fire-engine, the shop & service /Rescue theme can serve every purpose and will offer endless hours of play. Underneath there is shelter in two dif¬ferent spaces One space for shop keeper or a crew of fire fighters, and a smaller space under the climb¬ing wall to hide and repair a broken wheel or be ready

to fill up the next car with petrol. Climbing wall and net access invite climbers to choose their own way to reach the top. To get down fast, fire fighters will choose the fire man's pole on the rescue side.

General Product Information			
Dimensions LxWxH	524x339x289 cm		
Age group	2+		
Play capacity (users)	22		
Colour options			

Item no. MSC642400-3717P







MSC6424





Theme

Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.









Den

Physical: crawling trough the possible openings trains spatial awareness. Social-Emotional: the enclosed space invites social play for two or three children.









Physical: climbing the accessible stairway is for all and supports cross coordination as well as arm and leg muscles. For young children, walking stairs and alternating feet is developed. Social-Emotional: room for active breaks and adult helpers. An inclusive space.



Play sphere

different positions.



Social-Emotional: can be played from both

sides, encouraging cooperation. Cognitive:

cause and effect understanding. Creative:

leave a mark and place the spheres at







Curved climbing wall

Physical: children develop their cross-body coordination, proprioception and leg, arm and hand strength. Climbing on a curved surface is an extra challenge to muscles.











Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.



Crawl-through hole

Physical: the hole allows for climbing and crawling through, developing cross coordination, proprioception and spatial awareness. Social-Emotional: cooperation and turn-taking when passing one another. Cognitive: understanding space, shape and measures when seeing if the body can fit through the hole.

MSC6424





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



All floors are made of High-Pressure Laminate HPL with a thickness 17.8mm and non skid surface texture according to EN 438-6. KOMPAN HPL has high wearing strength to ensure long lifetime in all climates.



Curved climbing wall is made of Ekogrip® panel that consist of a 15mm thick PE base with 3 mm top-layer of soft rubber with a non-skid effect.



11011110. WOOO+2+00-07 171				
Installation Information				
Max. fall height		120 cm		
Safety surfacing area		36.3 m²		
Total installation time		24.5		
Excavation volume		0.87 m³		
Concrete volume		0.00 m³		
Footing depth (standard)		90 cm		
Shipment weight		734 kg		
Anchoring options	In-groun	d 🗸		
	Surface	~		
Warranty Information				
EcoCore HDPE		Lifetime		
Hot dip galvanised steel		Lifetime		
HPL decks	1	l5 years		
Ropes & nets	1	10 years		
Spare parts guaranteed	1	10 years		


Item no. MSC642400-3717P



Molded PE slides made with 33% postconsumer materials in different colors in onepiece design with a wall thickness of minimum 5mm. The PE is tested for UV stability and has excellent impact strength and it is usable within a large temperature span.



Ropes are made of UV-stabilized PP rope strands with inner steel cable reinforcement. Horizontal ropes are PUR coated to obtain good wear and tear resistance.

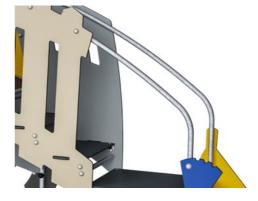

The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Sustainability Data

MSC6424





Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
MSC642400-3717P	1,317.23	2.25	51.97


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Themed play systems

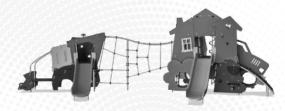

Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Themed play systems" represented by item no.: MSC641100-3717P.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

miss

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





MSC6424



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

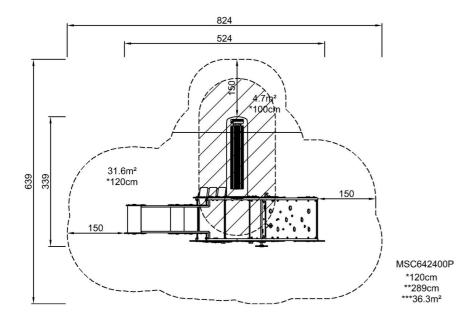

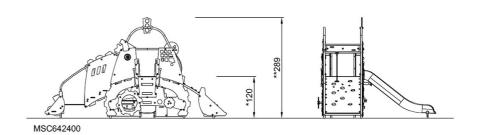

Click to see TOP VIEW

Click to see SIDE VIEW