MSC5427





General Product Information

Dimensions LxWxH 244x61x140 cm

Age group 1+
Play capacity (users) 2
Colour options



The Toddler's Town is a favourite play-ground activity that attracts children to be active and interactive in a thrilling way. The Toddler's Town offers a den under the slide platform, inviting meetings and socializing, the beginning of the first friendships. The stairway is wide and accommodates crawling. This trains children's cross-coordination, an important motor skill that

among others supports later reading skills. Sliding is a great thrill for the youngest children and it additionally trains their core muscles, sitting upright while sliding down, and their sense of balance and spatial understanding. These skills are important in navigating the world securely. They are the fundament of all motor skills and thus a fundament in physical

confidence in the child. The house theme is familiar and inspires stories, developing language.





MSC5427












### Slide

Physical: develops spatial awareness, sense of balance and trains core muscles when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down.

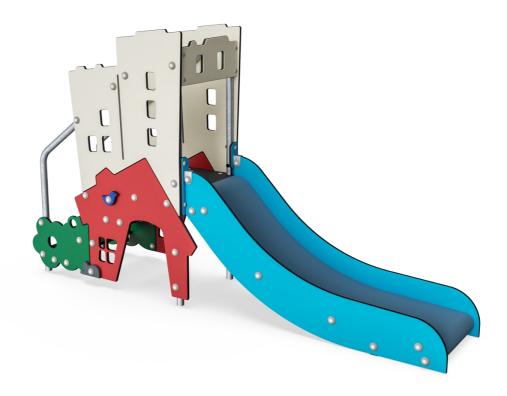









Physical: crawling trough the possible openings trains spatial awareness. Social-Emotional: the enclosed space invites social play for two or three children.







Physical: climbing the stairs supports cross coordination as well as arm and leg muscles. Social-Emotional: room for active breaks and adult helpers. An inclusive space.



### Themed element

Cognitive: set a tangible theme and thus spur dramatic play. Dramatic play is a great trainer of language skills.

MSC5427





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of a core produced from 100% recycled material.



All floors are made from high-pressure laminate HPL with a thickness 17.8mm and non-skid surface texture. KOMPAN HPL is high wearing and suitable for all climates.



The steel surfaces are hot-dip galvanised inside and outside with lead-free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Installation Information					
	Max. fall height	10	00 cm		
	Safety surfacing area	14	1.5 m²		
	Total installation time		7.3		
	Excavation volume	0.	17 m³		
	Concrete volume	0.	0.00 m <sup>3</sup>		
	Footing depth (standard)	(	60 cm		
	Shipment weight	1	149 kg		
	Anchoring options	In-ground	~		
		Surface	~		
Warranty Information					
	EcoCore HDPE	Lif	fetime		
	Galvanised Steel	Lif	fetime		
	HPL Decks	15 years			
	Spare Parts Guarantee	10	10 years		



The slide bed can be chosen in different materials: Straight moulded PE or stainless steel slide bed t=2mm. Sides of the slides are made of EcoCore™.



3 / 05/30/2024

**Sustainability Data** 

MSC5427





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg Recycled materials	
	kg CO₂e	kg CO₂e/kg	%
MSC542701-3418P	177.50	1.87	62.45


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Themed play systems

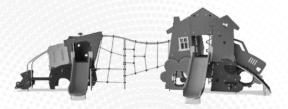

Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Themed play systems" represented by item no.: MSC641100-3717P.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

miss

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  ${\rm CO_2}$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000




MSC5427




\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

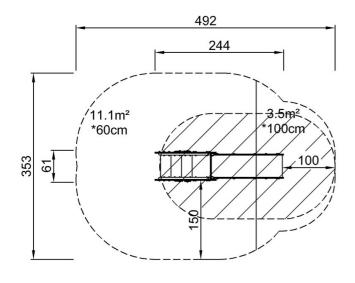

MSC542701 \*100cm \*\*140cm \*\*\*14.5m<sup>2</sup>

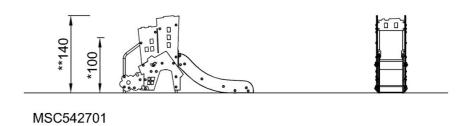

Click to see TOP VIEW

Click to see SIDE VIEW