Swing, 8 ft H, Std. Seats

KSW93014



Item no. KSW93014-0909				
General Product Information				
Dimensions LxWxH	14'3"x8'0"x9'0"			
Age group	2 - 12			
Play capacity (users)	2			
Color options				



Of all the play activities, swinging is a favorite: children love it, as it can be done individually and together. This swing set supports the play joy of doing the same thing at the same time, featuring two similar swing seats. The seats are shaped with a slight curve in the middle, to facilitate the secure seat position of a wide age span. A great place to play, for all ages, for

hours and days. Swinging apart from being great fun, trains the children's ABC: Agility, Balance and Coordination as well as their spatial awareness. These motor skills are crucial to being able to judge distances and navigate, traffic safely. Swings allows for standing, sitting, laying - and not least jumping off! Apart from the motor skills training, this

trains the arm, leg and core muscles. The jumping off builds bone density - the majority of which is built up during the first years of life.

Swing, 8 ft H, Std. Seats

KSW93014







Swing, 8 ft H, Std. Seats

KSW93014



The A-Frame is available in three post-material options: Hot-dip galvanized 76mm steel, impregnated pine wood 95x95mm with hot dip galvanized steel footings, or 120mm TexMade[™] posts.



The A-Frame is designed with a hot-dip galvanized 100mm crossbar with large steel end plates for strong fixation to the posts. The crossbeam is prepared for all KOMPAN hanger options.



The swing hangers are made of high quality UVstabalized nylon (PA6) housing with integrated lifetime sealed ball bearings. The height adjustable chains are fixed by a stainless steel hook with theft proof snake-eye bolt in a turn able anti twist housing. All seats with two chain fixation are available with either standard or anti-wrap suspension.

Installation Information					
Max. fall height		7'11"			
Safety surfacing area	603ft ²				
Total installation time	5.0 hours				
Excavation volume	2.17yd³				
Concrete volume	0yd³				
Footing depth (standard)	2'9"				
Shipment weight	338lbs				
Anchoring options	Surface 🗸				
	In-ground	~			
	in ground	•			
Warranty Inform	U	Ť			
Warranty Inform	ation	v (ears			
-	ation 10 Y	-			
Chains	ation 10 Y Life	/ears			
Chains Hot dip galvanized steel	ation 10 Y Life 10 Y	⁄ears etime			

Item no. KSW93014-0909



The standard seats of KOMPAN swings is engineered for maximum safety and durability. The seat two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot dip galvanized steel or stainless steel for all swings heights.



A-Frame GreenLine swings are equipped with stability panels to ensure frame durability. The panels are made of 19mm EcoCore[™], a highly durable, eco-friendly material. EcoCore[™] is not only recyclable after it's used, but it also consists of a core produced from 100% recycled post-consumer material from food packing waste.



KOMPAN GreenLine versions are constructed with the most environmentally friendly materials with the lowest possible CO2e emission factor. TexMade posts, EcoCoreTM panels of 100% post-consumer recycled ocean waste, and molded PP decks.

-	Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
	Present	0	1	1
	Required	0	0	0

ASTM F1487 compliant

Sustainability Data

Cradle to Gate A1-A3

KSW93014-0950

KSW93014-0909

KSW93014



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



BUREAU VERITAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

248.16

395.09

CO2e/kg

kg CO₂e/kg

1.05

2.77

Recycled

materials

%

82.84


47.77




KSW93014

* Max fall height | ** Total height | *** Safety surfacing area



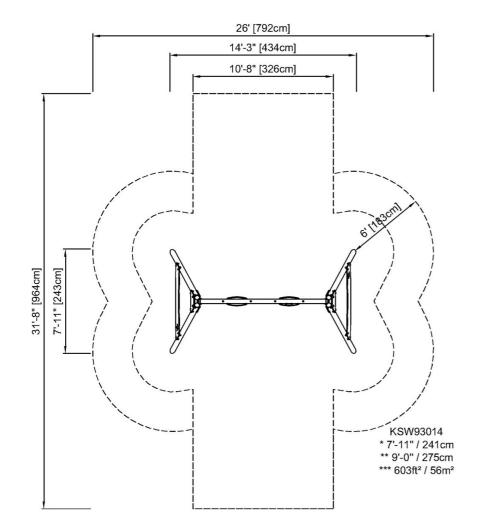

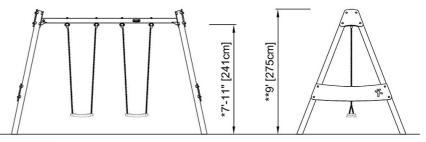

* Max fall height | ** Total height

KSW93014

Click to see TOP VIEW

Click to see SIDE VIEW