COR29950





Item no. COR299501-0406

General Product Information

Dimensions LxWxH 13'7"x6'3"x8'1" 5 - 12

Age group

Play capacity (users)

Color options









Wow! The Surfer is an attractive, swaying meeting point with two lovely Loops. The blue and green Loops invite meetings for two or more children. Their rubbery materials add a soft, gently bouncy feel that children enjoy. The swaying movements gently develop a sense of balance. The sense of balance is fundamental to all other movements: walking, running and

even sitting still, which takes trunk stability. A well-functioning sense of balance promotes learning at school and concentrating. The social-emotional play value of the Surfer is evident: children sit by themselves or with a friend to have friendly chats. They enjoy the fact that there is finally a fun playground meeting point that is designed to meet their

need for quirky breaks with friends, enjoying time together while standing, sitting, lying, kneeling, hanging - and all of it while swaying. The Surfer is a great place for making friends.



COR29950









Hangout pod

Physical: sitting and lying enjoying the swaying movements stimulate the sense of balance. Social-Emotional: meeting, taking a break is invited. Turn-taking supports the skills necessary to learn how to avoid conflicts.



COR29950






Hangout pod designed with a welded frame of two steel rings which are hot dip galvanized and powder coated. The membrane consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance.



The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.

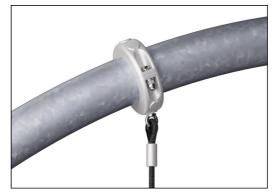

Corocord aluminium clamps are used as connectors between steel posts and rope. Two aluminium castings are bolted together. The height of the clamps is thus variable.

Item no. COR299501-0406

Installation Information			
Max. fall height	1'1'		
Safety surfacing area	380ft ²		
Total installation time	6.6		
Excavation volume	2.76yd ³		
Concrete volume	1.57yd³		
Footing depth (standard)	3'7'		
Shipment weight	744lbs		
Anchoring options	In-ground ✓		

Warranty Information			
Hot dip galvanized steel	Lifetime		
Painted toplayer	10 Years		
Ropes & nets	10 Years		
Spare Parts Availability	10 Years		
Stainless steel components	Lifetime		

|--|

Corocord ropes with 19mm diameter or more are special 'Hercules' - type with galvanized six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Ground anchoring chains are made of 6mm thick hot dip galvanized steel.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



Sustainability Data

COR29950





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:



Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR299501-0406	889.03	2.74	45.17


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


COR29950



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

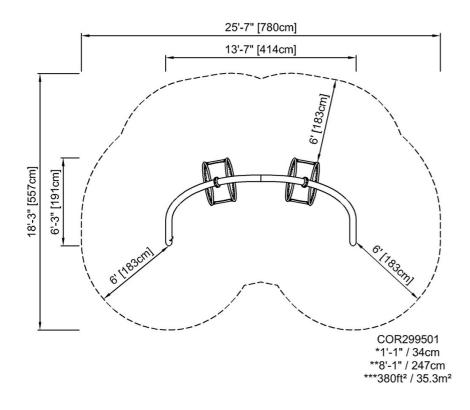

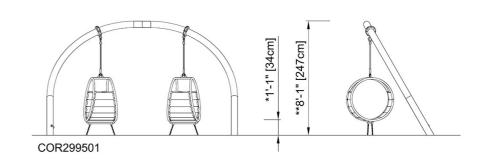

Click to see TOP VIEW

Click to see SIDE VIEW